


- VERY WIDE RANGE OF SUPPLY VOLTAGE 3 to 16V
- HIGH RECOVERED AUDIO SIGNAL (100 mV,  $\Delta f = \pm 22.5$  KHz or  $m = 0.3$ )
- DESIGNED FOR USE WITH EXTERNAL RATIO DETECTOR OR INTERNAL QUADRATURE DETECTOR
- VERY GOOD AM SIGNAL HANDLING (1V;  $m = 0.8$ )
- VERY SIMPLE DC SWITCHING OF AM-FM SECTIONS
- SUITABLE FOR CAPACITANCE, VARICAP AND INDUCTIVE TUNING
- VERY LOW TWEET
- COMMON (AM-FM) FIELD STRENGTH METER OUTPUT PIN

The TDA 2220 is a high performance AM/FM radio IC designed for use in a wide range of car radio, portable radio and home radio applications, operating on a supply voltage from 3 to 16V. A special feature of this device is that it may be used with an internal quadrature detector or an external ratio detector. The TDA 2220 is supplied in a 20 pin plastic DIP package.




DIP-20 Plastic  
(0.4)

ORDERING NUMBER: TDA 2220

### ABSOLUTE MAXIMUM RATINGS

|                |                                                            |            |                  |
|----------------|------------------------------------------------------------|------------|------------------|
| $V_s$          | Supply voltage                                             | 16         | V                |
| $P_{tot}$      | Total power dissipation at $T_{amb} \leq 70^\circ\text{C}$ | 800        | mW               |
| $T_{op}$       | Operating temperature                                      | -40 to 85  | $^\circ\text{C}$ |
| $T_{stg}, T_j$ | Storage and junction temperature                           | -55 to 150 | $^\circ\text{C}$ |

### BLOCK DIAGRAM

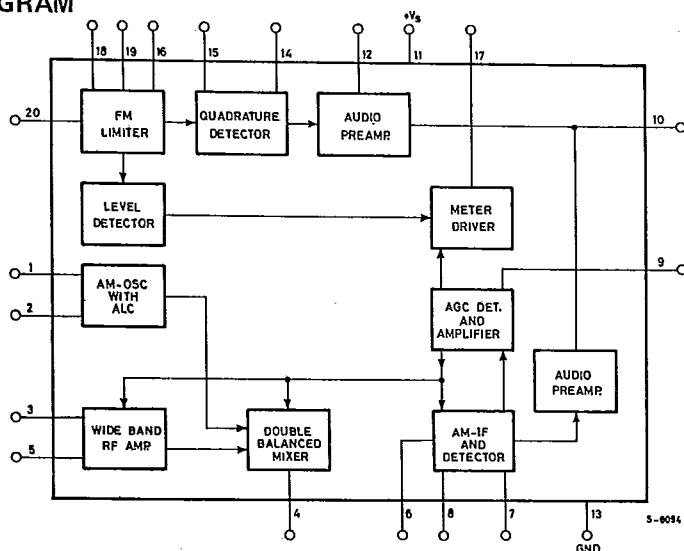


## CONNECTION DIAGRAM

(top view)

S G S-THOMSON

3DE D

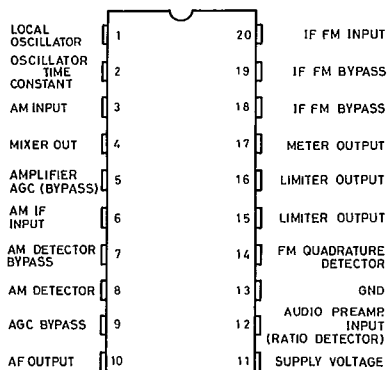

S-6093/1

## THERMAL DATA

 $R_{th}$  J-amb Thermal resistance junction ambient

max 100 °C/W

**ELECTRICAL CHARACTERISTICS** (Refer to the test circuits,  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_s = 9\text{V}$ , unless otherwise specified)

| Parameter            | Test conditions | Min. | Typ. | Max. | Unit |
|----------------------|-----------------|------|------|------|------|
| $V_s$ Supply voltage |                 | 3    | 9    | 16   | V    |
| $I_d$ Current drain  | AM Section      | 10   | 16   | 21   | mA   |
|                      | FM Section      | 10   | 14   | 21   |      |

**AM SECTION** ( $f_o = 1\text{MHz}$ ;  $f_m = 1\text{KHz}$ )

|                                              |                                          |     |     |     |               |
|----------------------------------------------|------------------------------------------|-----|-----|-----|---------------|
| $V_i$ Input sensitivity                      | S/N = 26 dB $m = 0.3$                    |     | 12  | 25  | $\mu\text{V}$ |
| $\frac{S+N}{N}$ Signal to noise ratio        | $V_i = 10\text{mV}$ $m = 0.3$            | 45  |     |     | dB            |
| $V_i$ AGC range                              | $\Delta V_{out} = 10\text{dB}$ $m = 0.8$ | 100 |     |     | dB            |
| $V_o$ Recovered audio signal (pin 10)        | $V_i = 1\text{mV}$ $m = 0.3$             | 75  | 120 | 170 | mV            |
| d Distortion                                 |                                          |     | 0.5 |     | %             |
| d Distortion                                 | $V_i = 1\text{mV}$ $m = 0.8$             |     | 2   | 3   | %             |
| $V_H$ Max input signal handling capability   | $m = 0.8$ $d < 10\%$                     | 1   |     |     | V             |
| $R_i$ Input resistance between pins 3 and 5  | $m = 0$                                  |     | 7.5 |     | K $\Omega$    |
| $C_i$ Input capacitance between pins 3 and 5 | $m = 0$                                  |     | 18  |     | pF            |
| $R_o$ Output resistance (pin 10)             |                                          | 4.5 | 7   | 9.5 | K $\Omega$    |
| Tweet 2 IF                                   | $m = 0.3$ $V_i = 1\text{mV}$             |     | 38  |     | dB            |
| Tweet 3 IF                                   |                                          |     | 55  |     | dB            |
| $V_m$ (*) Meter output                       | $V_i = 1\text{mV}$ $m = 0.3$             |     | 130 |     | mV            |

(\*) Meter resistance = 1.3 K $\Omega$ .

S G S-THOMSON

30E D

## ELECTRICAL CHARACTERISTICS (Continued)

| Parameter                                                                                              | Test conditions                                                 | Min. | Typ. | Max. | Unit             |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|------|------|------|------------------|
| <b>FM SECTION (<math>f_o = 10.7\text{MHz}</math>; <math>f_m = 1\text{KHz}</math>) (RATIO DETECTOR)</b> |                                                                 |      |      |      |                  |
| $V_i$ Input limiting voltage                                                                           | -3 dB limiting point                                            |      | 25   | 36   | $\mu\text{V}$    |
| AMR Amplitude modulation rejection                                                                     | $\Delta f = \pm 22.5\text{KHz}$ $m = 0.3$<br>$V_i = 3\text{mV}$ | 50   | 60   |      | dB               |
| $\frac{S+N}{N}$ Signal to noise ratio                                                                  | $\Delta f = \pm 22.5\text{KHz}$ $V_i = 10\text{mV}$             | 55   | 65   |      | dB               |
| d Distortion                                                                                           | $\Delta f = \pm 75\text{KHz}$ $V_i = 1\text{mV}$                |      | 0.4  | 0.7  | %                |
| d Distortion                                                                                           | $\Delta f = \pm 22.5\text{KHz}$ $V_i = 1\text{mV}$              |      | 0.2  |      | %                |
| $V_o$ Recovered audio signal (pin 10)                                                                  | $\Delta f = \pm 22.5\text{KHz}$ $V_i = 1\text{mV}$              | 75   | 120  | 170  | mV               |
| $R_i$ Input resistance between pin 20 and ground                                                       | $\Delta f = 0$                                                  |      | 6.5  |      | $\text{K}\Omega$ |
| $C_i$ Input capacitance between pin 20 and ground                                                      | $\Delta f = 0$                                                  |      | 14   |      | pF               |
| $R_o$ Output resistance (pin 10)                                                                       |                                                                 | 4.5  | 7    | 9.5  | $\text{K}\Omega$ |
| $V_m(*)$ Meter output                                                                                  | $V_i = 1\text{mV}$ $\Delta f = \pm 22.5\text{KHz}$              |      | 110  |      | mV               |

|                                                                                                             |                                                                 |     |      |     |                  |
|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|-----|------|-----|------------------|
| <b>FM SECTION (<math>f_o = 10.7\text{MHz}</math>; <math>f_m = 1\text{KHz}</math>) (QUADRATURE DETECTOR)</b> |                                                                 |     |      |     |                  |
| $V_i$ Input limiting voltage                                                                                | -3dB limiting point                                             |     | 25   | 36  | $\mu\text{V}$    |
| AMR Amplitude modulation rejection                                                                          | $\Delta f = \pm 22.5\text{KHz}$ $m = 0.3$<br>$V_i = 3\text{mV}$ | 35  | 44   |     | dB               |
| $\frac{S+N}{N}$ Signal to noise ratio                                                                       | $\Delta f = \pm 22.5\text{KHz}$ $V_i = 10\text{mV}$             | 55  | 65   |     | dB               |
| d Distortion                                                                                                | $\Delta f = \pm 75\text{KHz}$ $V_i = 1\text{mV}$                |     | 0.7  | 1.5 | %                |
| d Distortion                                                                                                | $\Delta f = \pm 22.5\text{KHz}$ $V_i = 1\text{mV}$              |     | 0.25 |     | %                |
| d Distortion (double tuned)                                                                                 |                                                                 |     | 0.1  |     | %                |
| $V_o$ Recovered audio signal (pin 10)                                                                       | $\Delta f = \pm 22.5\text{KHz}$ $V_i = 1\text{mV}$              | 60  | 90   | 130 | mV               |
| $R_i$ Input resistance between pin 20 and ground                                                            | $\Delta f = 0$                                                  |     | 6.5  |     | $\text{K}\Omega$ |
| $C_i$ Input capacitance between pin 20 and ground                                                           | $\Delta f = 0$                                                  |     | 14   |     | pF               |
| $R_o$ Output resistance (pin 10)                                                                            |                                                                 | 4.5 | 7    | 9.5 | $\text{K}\Omega$ |
| $V_m(*)$ Meter output                                                                                       | $V_i = 1\text{mV}$ $\Delta f = \pm 22.5\text{KHz}$              |     | 110  |     | mV               |

(\*) Meter resistance = 1.3  $\text{K}\Omega$ .

S G S-THOMSON

30E D

Fig. 1 - Test circuit with FM ratio detector


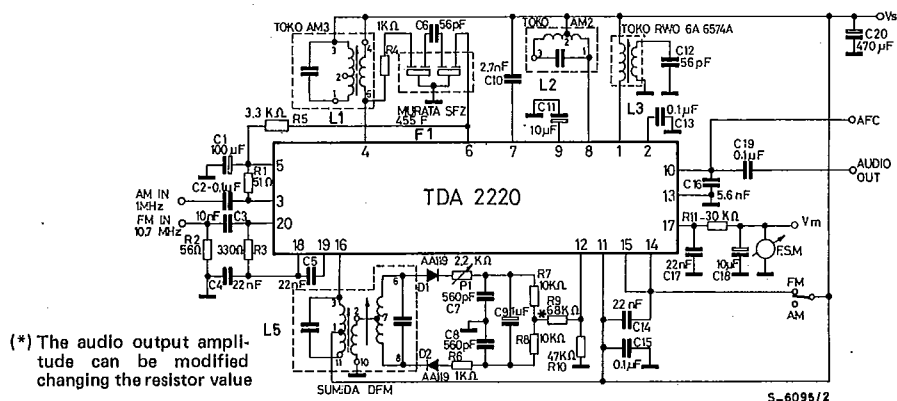



Fig. 2 - P.C. board and component layout of the circuit of fig. 1 (1:1 scale)

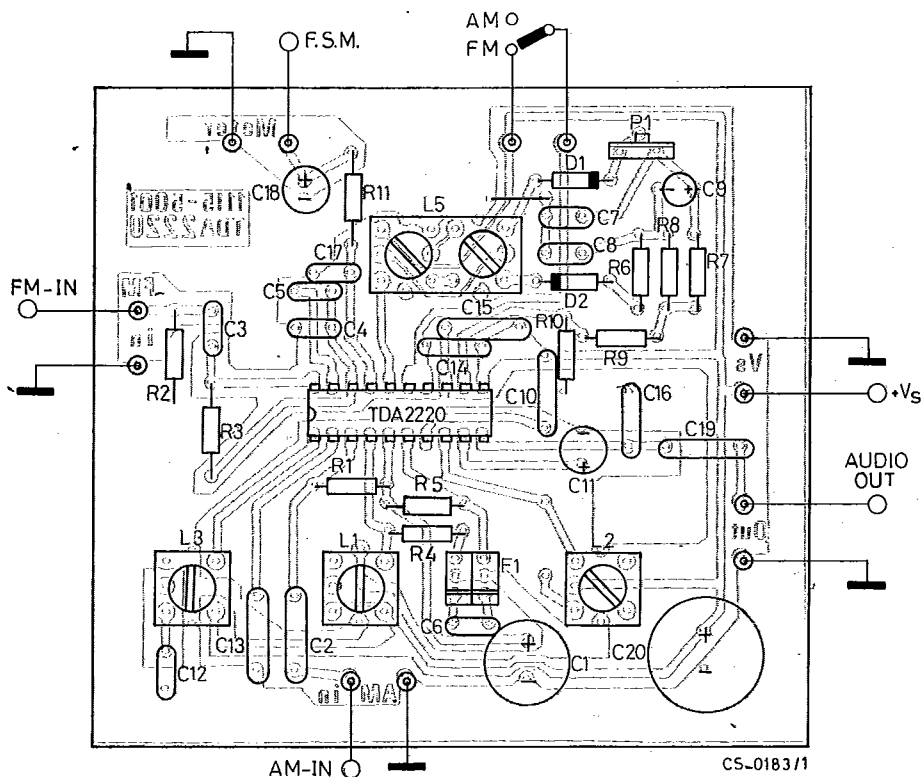


S G S-THOMSON

30E D

**Fig. 3 - Test circuit with FM quadrature detector**

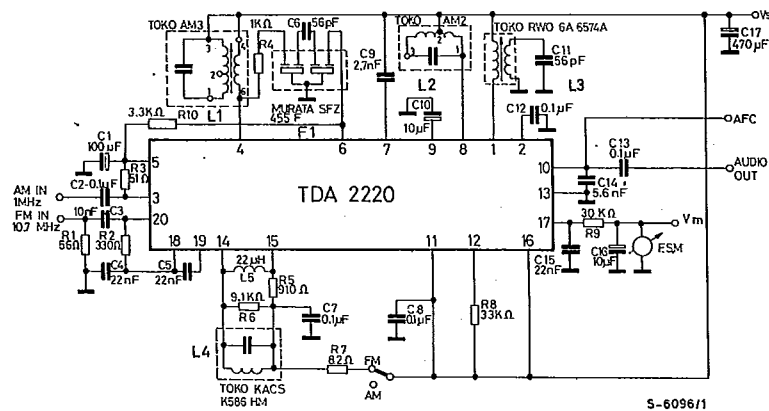


**Fig. 4 – P.C. board and component layout of the circuit of fig. 3 (1:1 scale)**

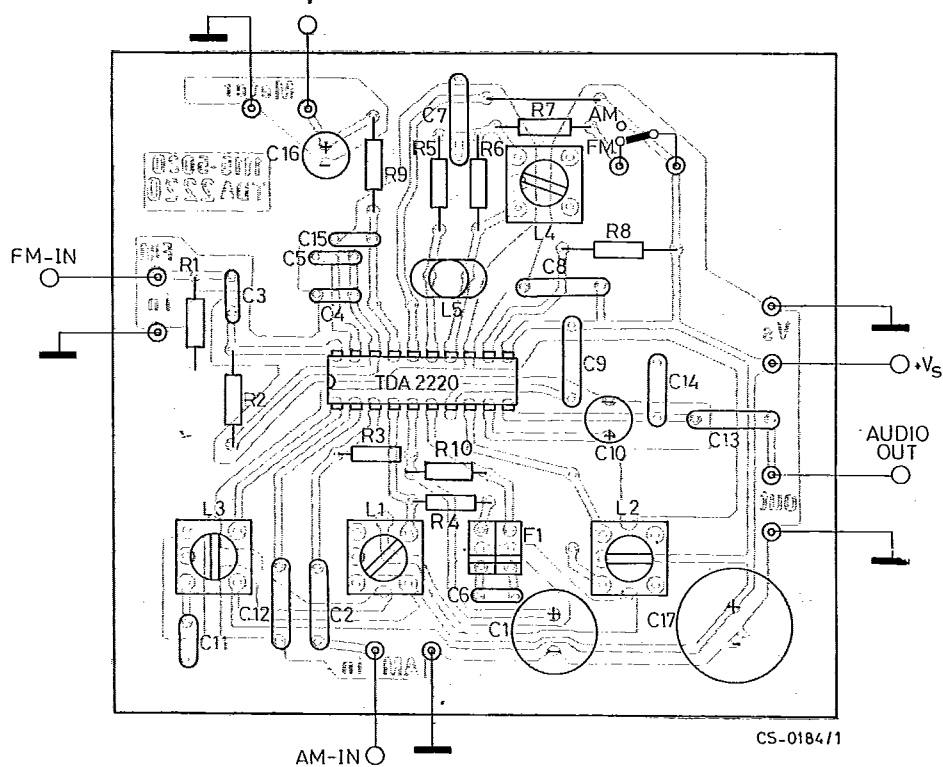

S G S-THOMSON

30E D


## L1 - 455 kHz IF Coil



| $C_o$ (pF) | $f$ (MHz) | $Q_o$ | TURNS |     |     |
|------------|-----------|-------|-------|-----|-----|
|            |           |       | 1-2   | 2-3 | 4-6 |
| 180        | 455       | 70    | 57    | 116 | 24  |

TOKO AM3 - 10x10 mm  
RLC - 4A7525N


## L2 - AM Detector Coil



| $C_o$ (pF) | $f$ (KHz) | $Q_o$ | TURNS |     |     |
|------------|-----------|-------|-------|-----|-----|
|            |           |       | 1-2   | 2-3 | 4-6 |
| 180        | 455       | 70    | 173   | 94  | 9   |

TOKO AM2 - 10x10 mm.  
RLC - 4A7524EK


## L3 - AM Oscillator Coil



| $f$ (kHz) | $L$ (μH) | $Q_o$ | TURNS |     |     |
|-----------|----------|-------|-------|-----|-----|
|           |          |       | 1-2   | 2-3 | 4-6 |
| 796       | 220      | 80    | 2     | 75  | 8   |

TOKO - 10x10 mm.  
RWO - 6A6574N

## L4 - FM Detector Coil




S-6097

| $C_o$ (pF) | $f$ (MHz) | $Q_o$ | TURNS |   |   |
|------------|-----------|-------|-------|---|---|
|            |           |       | 1-3   | — | — |
| 82         | 10.7      | 100   | 12    | — | — |

TOKO - 10x10 mm  
KACS - K586 HM

## L5 - Ratio Detector

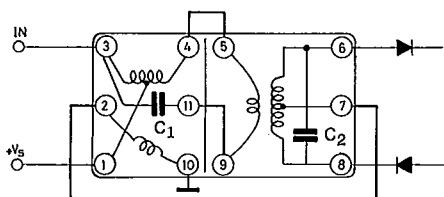


S-6098

| $C_1$ (pF) | $C_2$ (pF) | $f$ (MHz) | $Q_o$ |
|------------|------------|-----------|-------|
| 3-11       | 6-8        |           |       |
| 27         | 47         | 10.7      | 70    |

SUMIDA  
DFM

| TURNS |     |      |     |     |     |
|-------|-----|------|-----|-----|-----|
| 1-3   | 1-4 | 2-10 | 5-9 | 6-7 | 7-8 |
| 11    | 6½  | 5½   | ½   | 7   | 7   |

Fig. 5 - AM/FM car radio receiver.

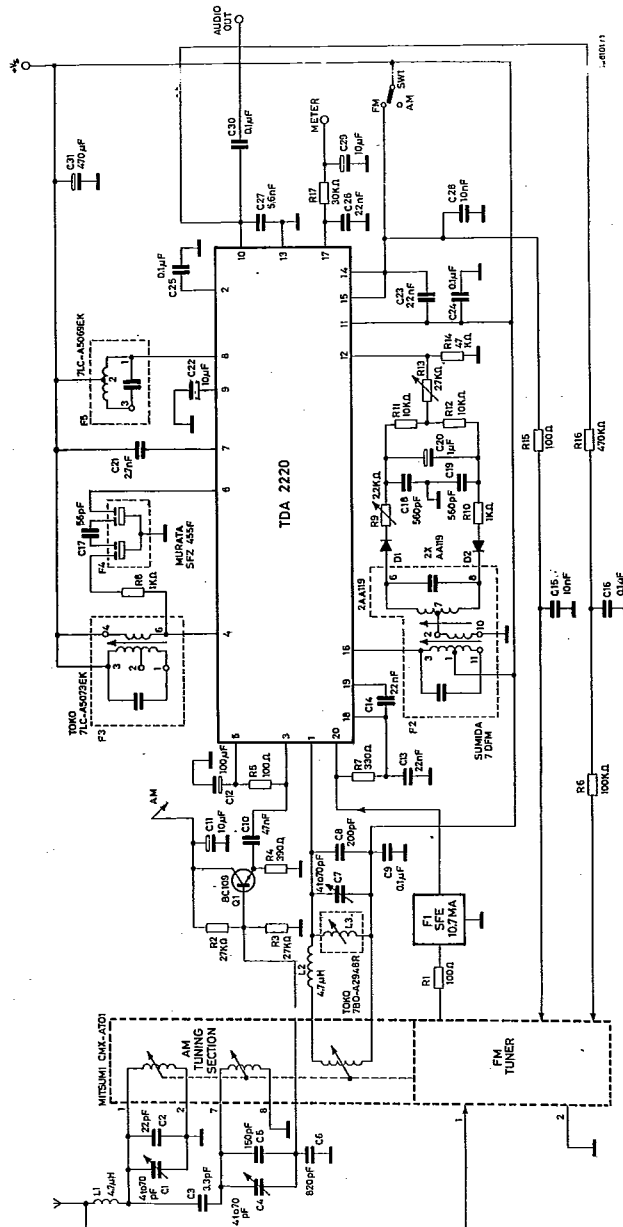

Note - The transistor Q1 can be eliminated using the tuner of fig. 7.

S G S-THOMSON

30E D

Fig. 6 - P.C. board and component layout of the circuit of fig. 5 (1:1 scale)

