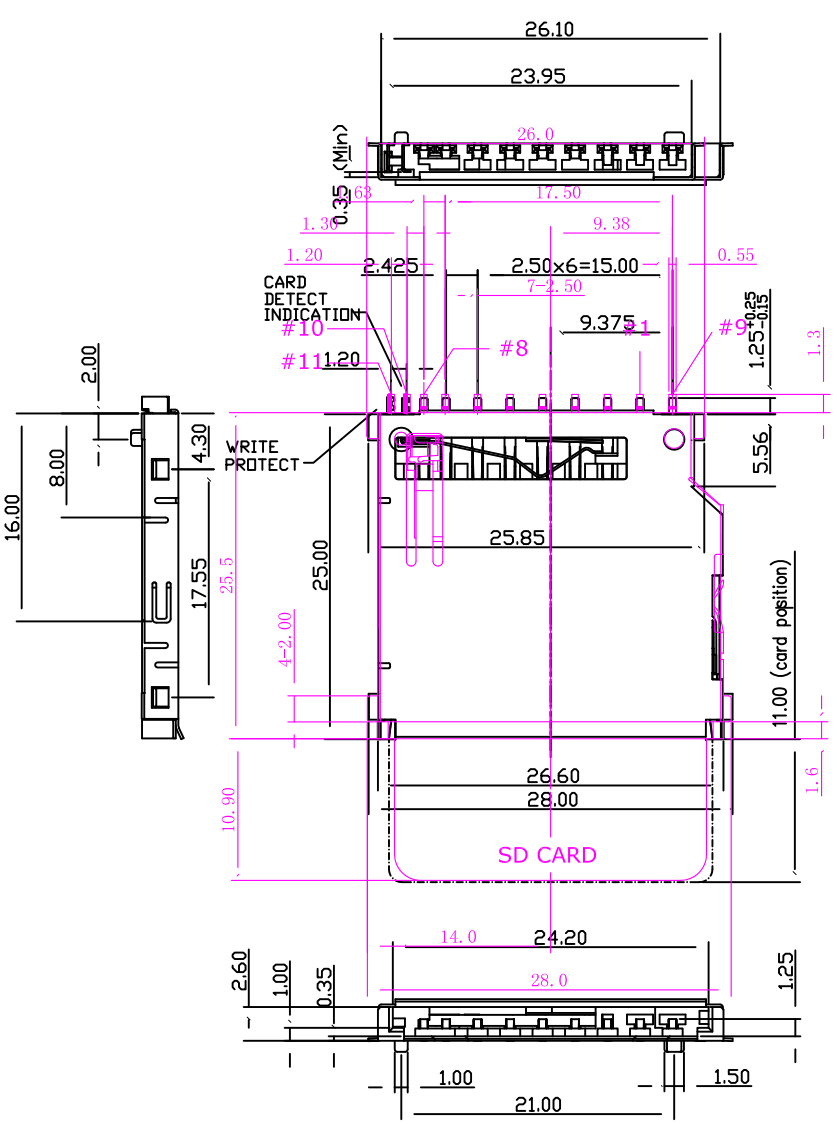

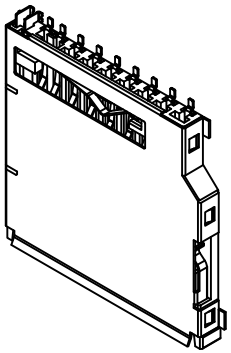

PIN#	NAME
1	CD/DAT3
2	CMD
3	VSS1
4	VDD
5	CLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2

SPECIFICATION
MATERIAL
Insulator: LCP UL94V-0
Contacts: Copper Alloy
Shell: Copper Alloy
CONTACT PLATING
Underplate: 50u" Nickel
Contact Area: 15u" Gold Plating
Solder Tails Area: 100u" Tin(Lead Free)
ELECTRICAL
Current Rating: 1 Amps Max.
Contact Resistance: 100 mohms Max.
Insulation Resistance: 1000 Mohms Min @ 500 VDC
MECHANICAL
Mating Cycles: 10000 Cycles
Temperature Range: -25°C To +85°C

PRODUCT NUMBER:
104C-T A A 0-R
1 2 3 4

1.Type
T: Top Mount

2.Contact Plating
A: 15u"Gold Plating

3.Stand Off
A: 0mm

4.RoHS

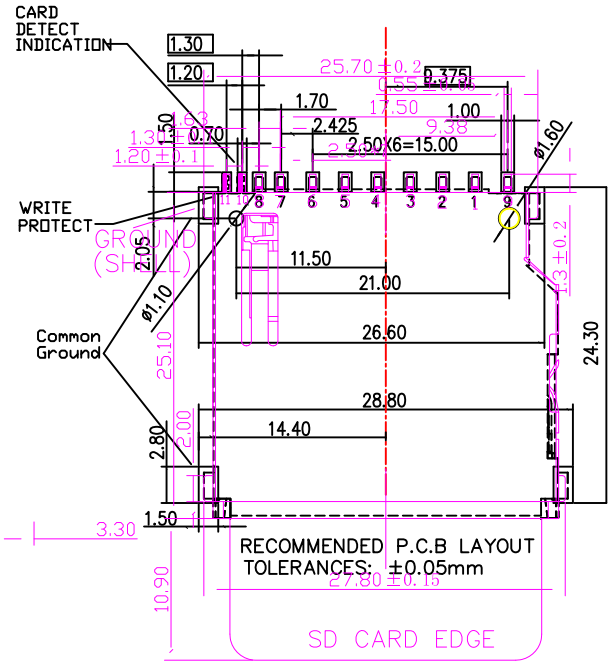

3	ECR2000005	2020/05/20			
REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWED	UNIT: mm
DRAWN	Willis	2012/08/03
CHECKED	Angel	2012/08/03
APPROVED	Ken	2012/08/03

SIZE A4 REV. 1.0

ATTEND
www.attend.com.tw

DRAWN NAME: SD Socket Top Mount Type

PRODUCT NO. 104C-TAA0-R

FILE NAME 104C-TAA0-R_B_3