

XC6206 Series


TOREX


ETR0305_003a

Low ESR Cap.Compatible Positive Voltage Regulators

0

TYPICAL APPLICATION CIRCUIT




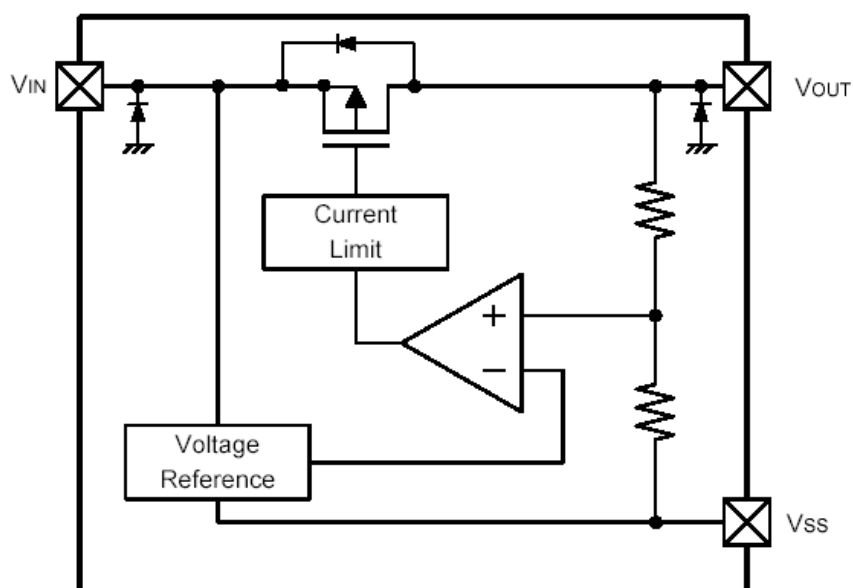







Ta=25°C

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V _{IN}	7.0	V
Output Current		I _{OUT}	500 *	mA
Output Voltage		V _{OUT}	V _{SS} - 0.3 ~ V _{IN} + 0.3	V
Power Dissipation	SOT-23	P _d	250	mW
	SOT-89		500	
	USP-6B		100	
	TO-92		300	
Operating Temperature Range		T _{opr}	- 40 ~ + 85	°C
Storage Temperature Range		T _{stg}	- 55 ~ + 125	°C




PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage ^(*)	V _{OUT(E)} ^(*) 2	I _{OUT} =30mA	x 0.98	V _{OUT(T)} E-1	x 1.02	V	




(3) Output Voltage vs. Input Voltage

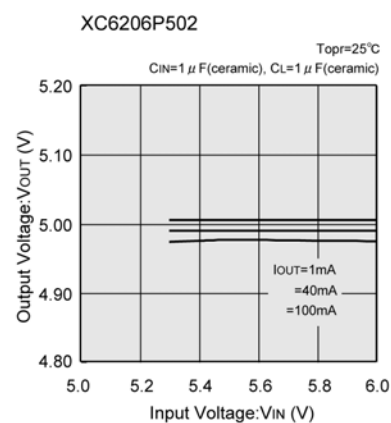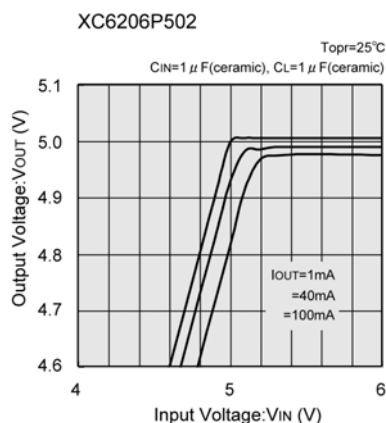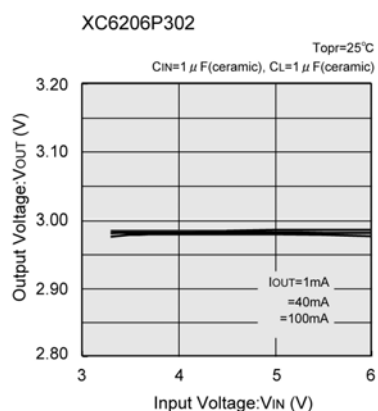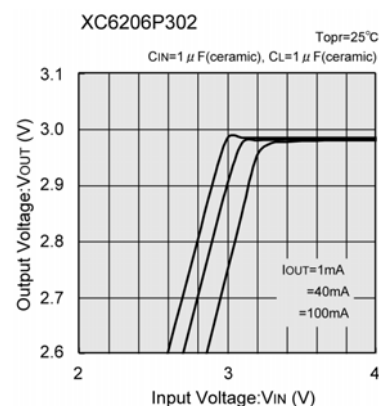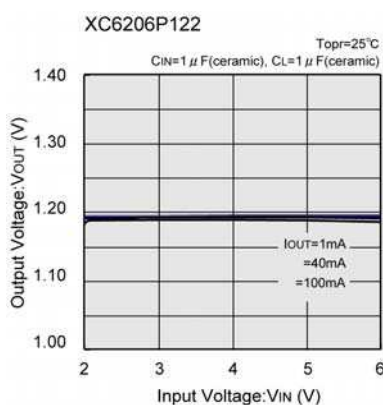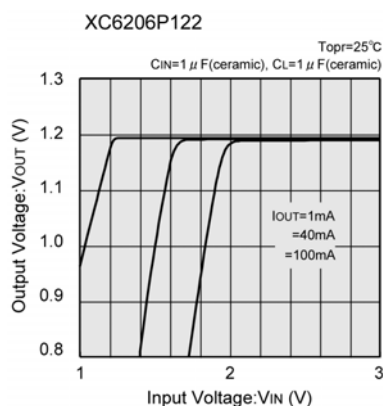

(4) Dropout Voltage vs. Output Current

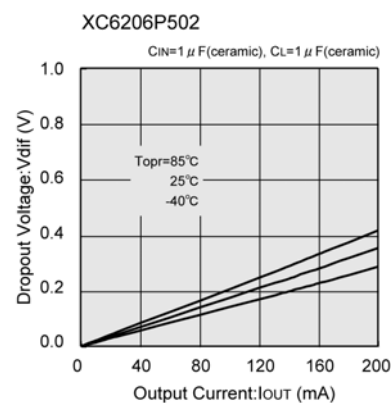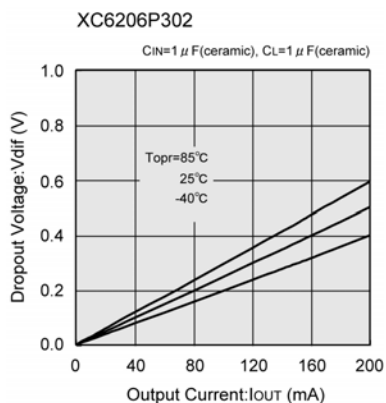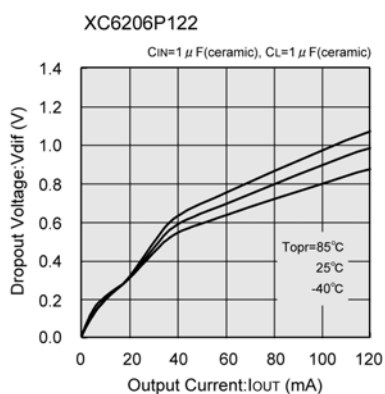


(5) Supply Current vs. Input Voltage

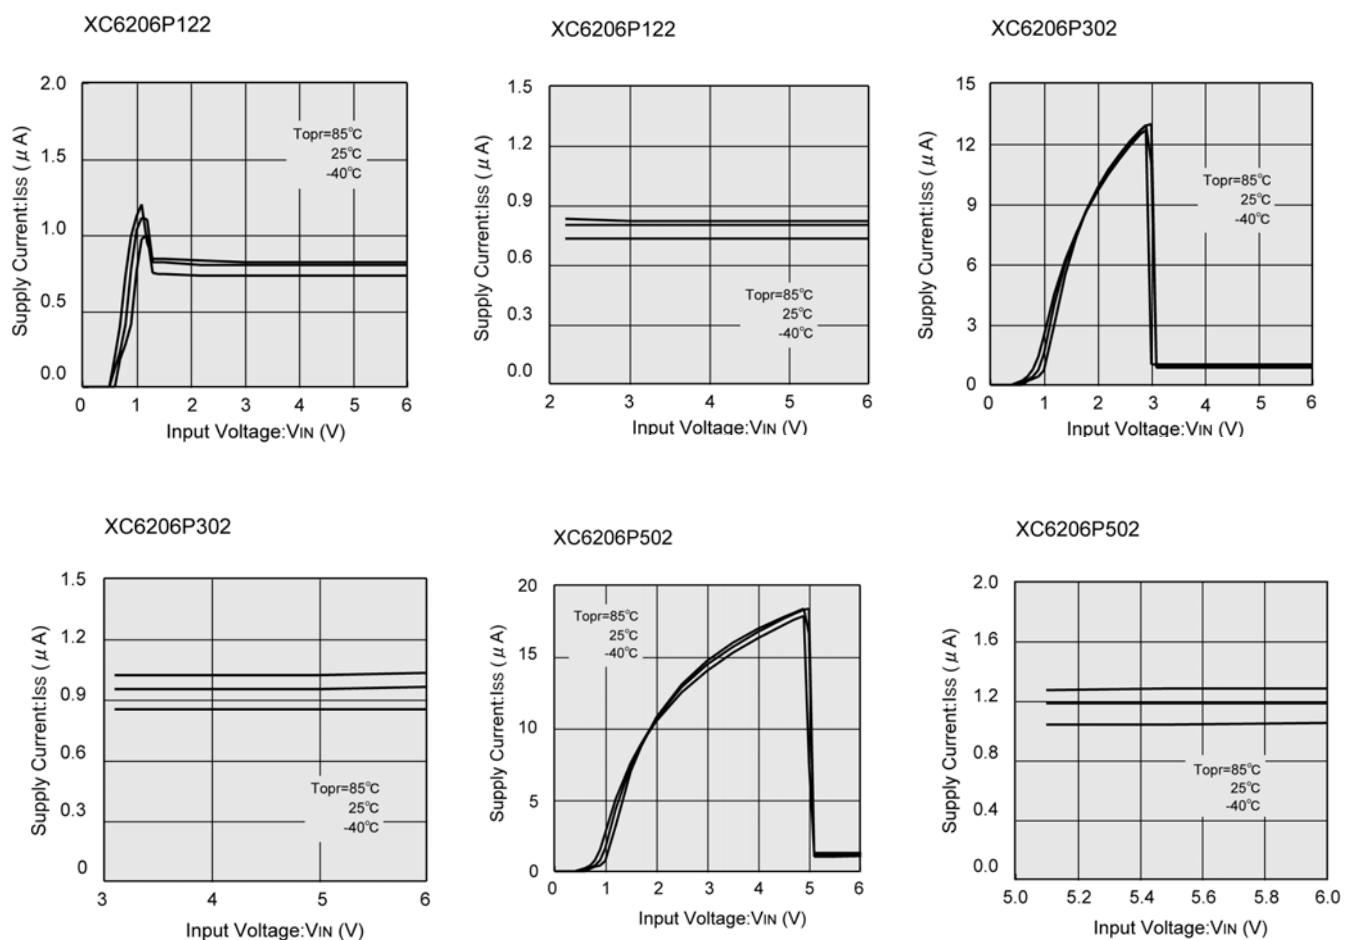


(6) Output Voltage vs. Ambient Temperature

(7) Output Voltage vs. Ambient Temperature


(8) Input Transient Response 1

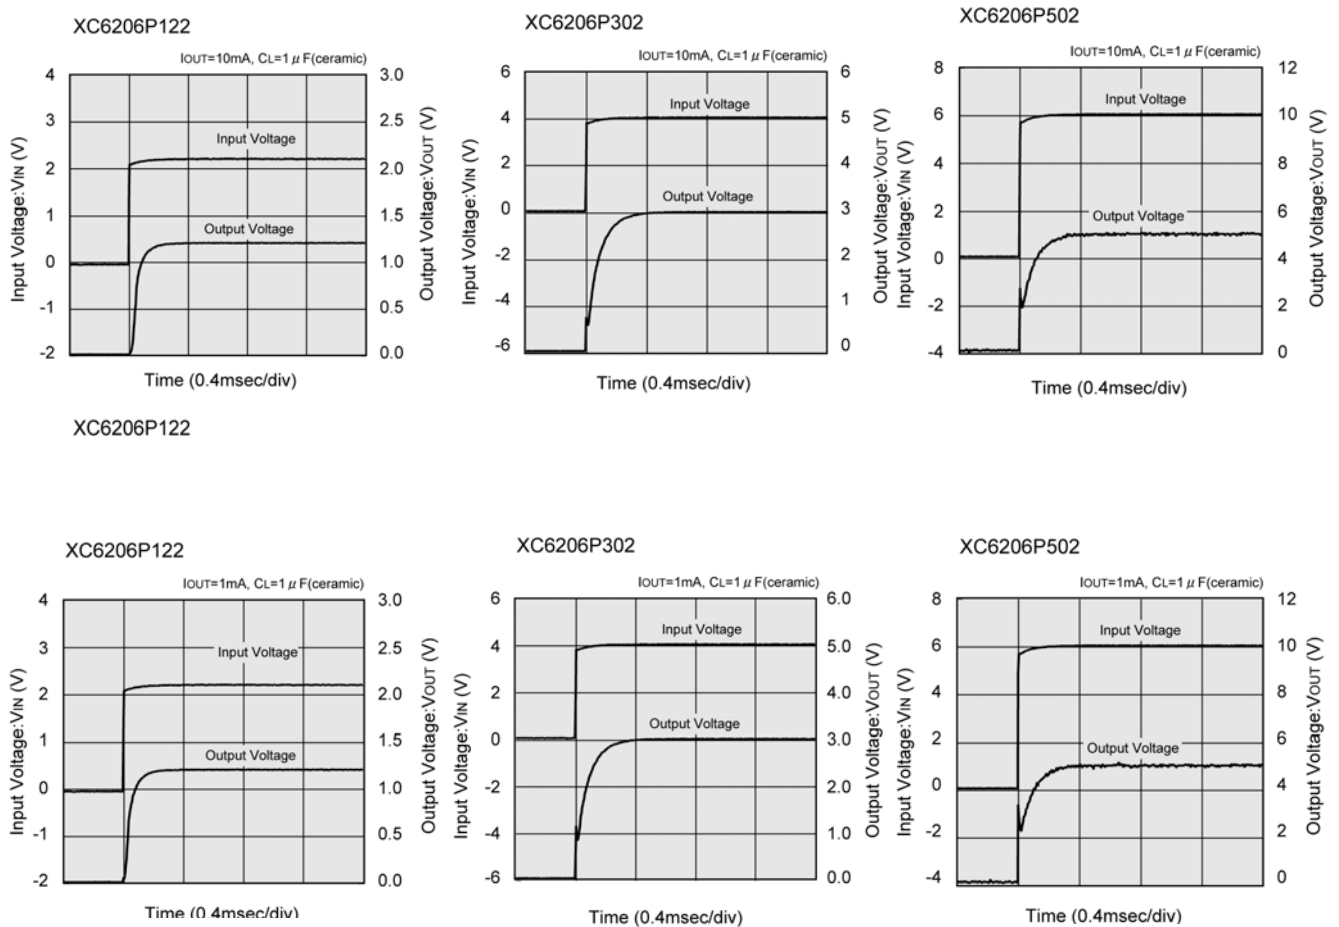







(9) Input Transient Response 2

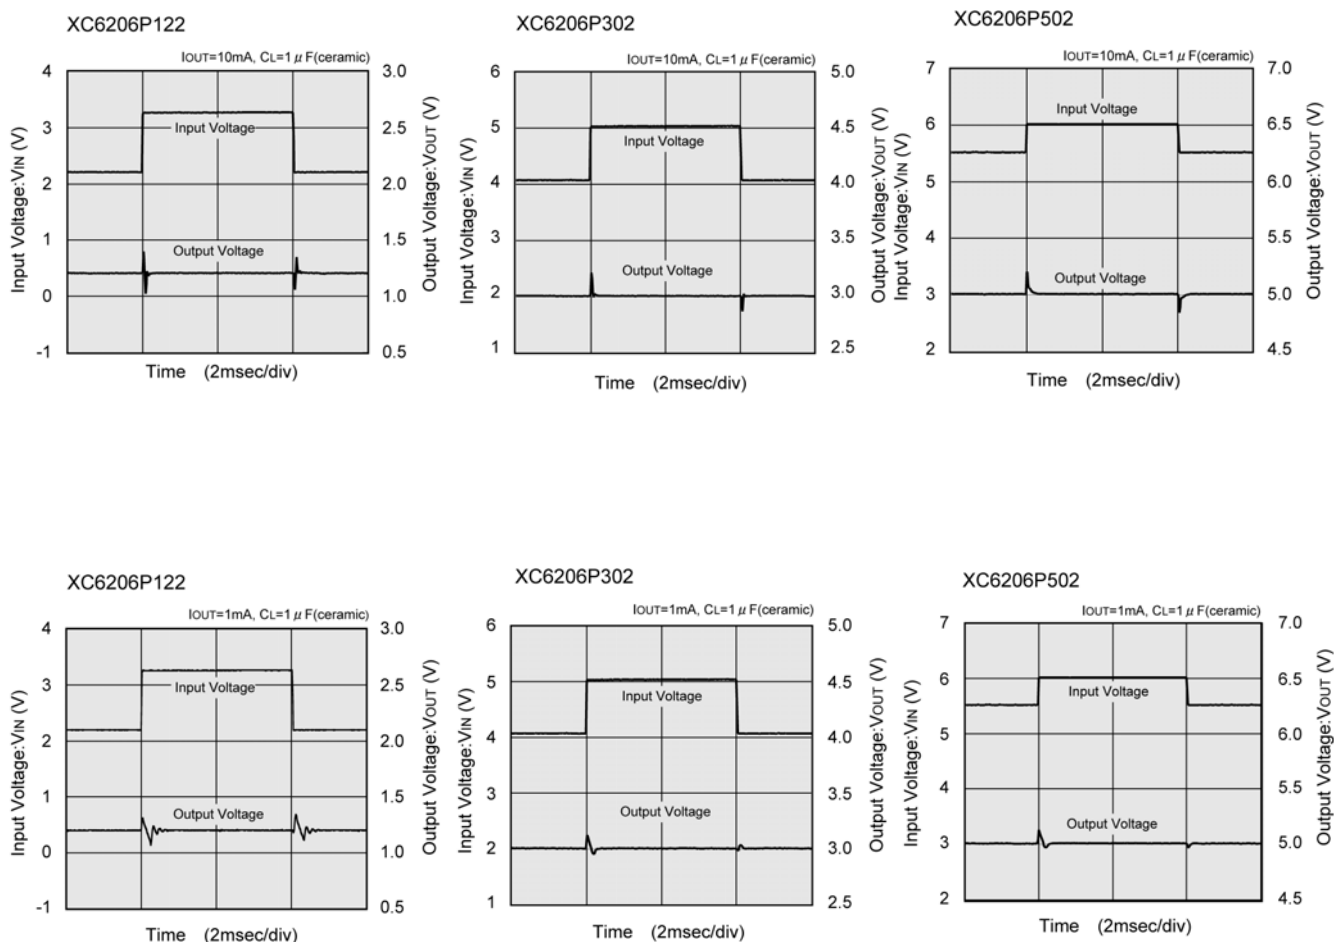



(10) Load Transient Response

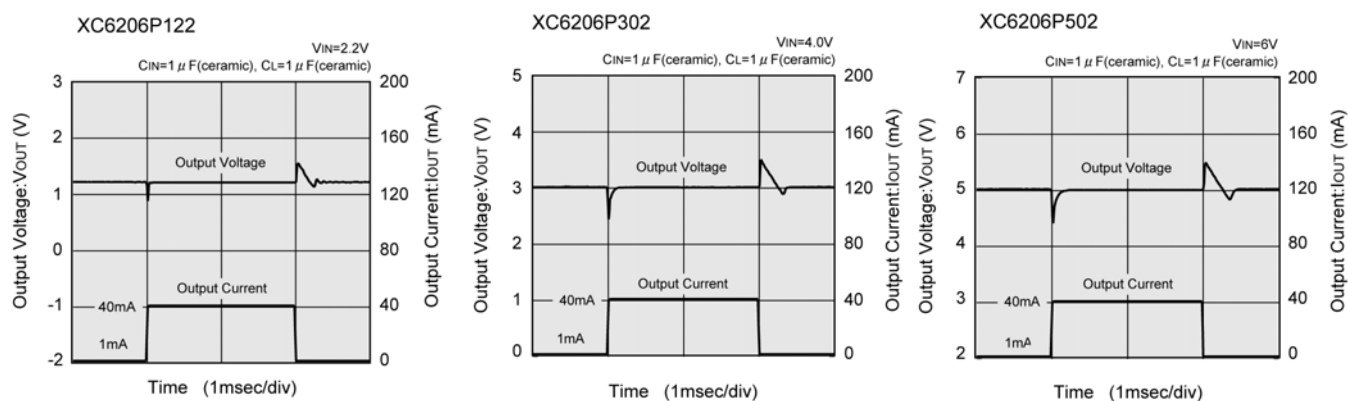


(11) Ripple Rejection Rate

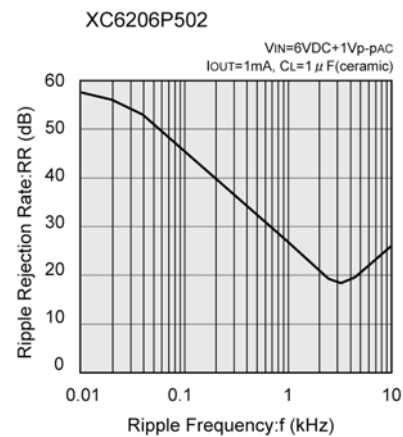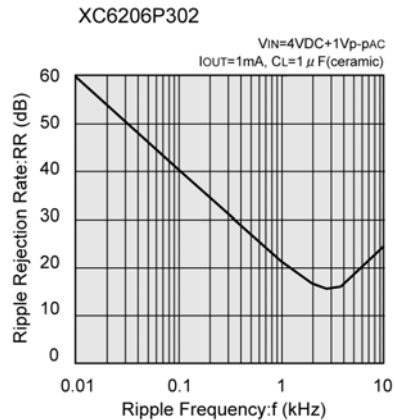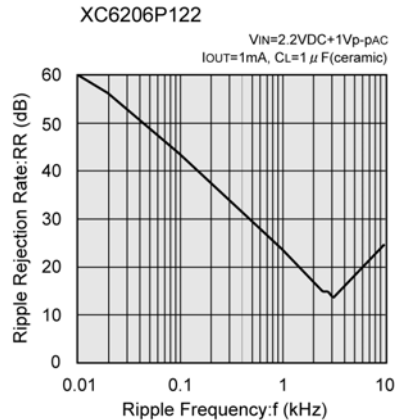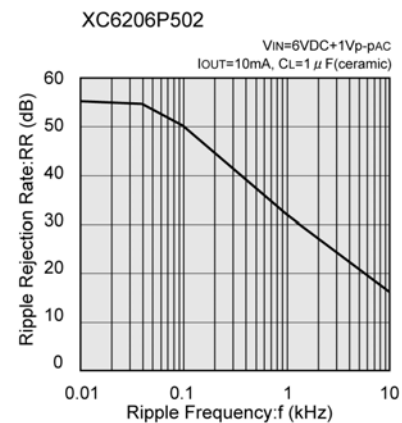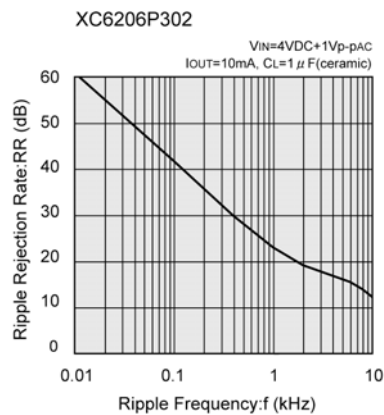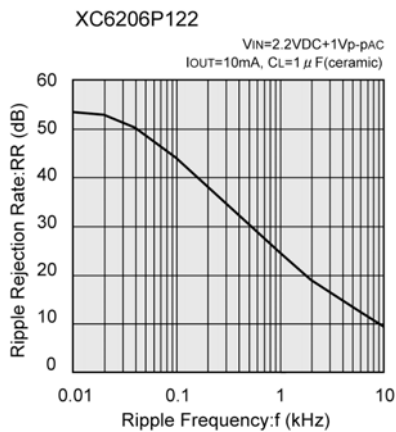





SOT-89
(TOP VIEW)



1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet.
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure or malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

TOREX SEMICONDUCTOR LTD.