
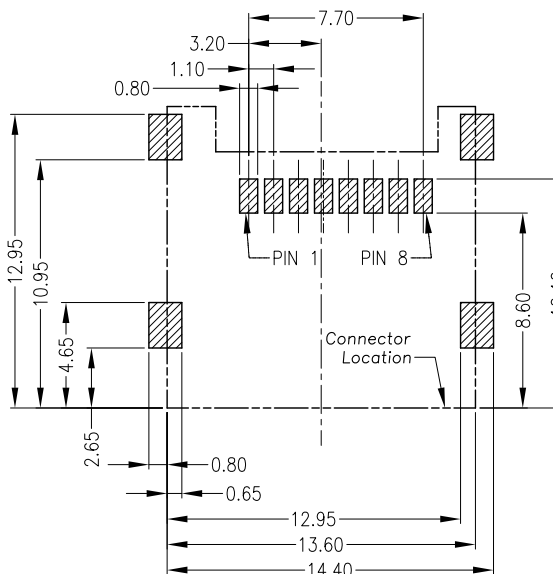


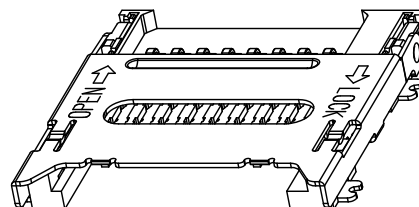

MATERIALS

1. HOUSING : HI.-TEMP PLASTIC (UL 94V-0).BLACK.
2. TERMINAL : COPPER ALLOY.
GOLD PLATED OVERALL (T=0.15).
3. FORK : STAINLESS STEEL. (t=0.20mm)
TIN PLATED OVERALL.
- 4.SHELL : STAINLESS STEEL (t=0.20mm)

SPECIFICATION

1. CURRENT RATING : 0.5 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M Ω MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m Ω MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.

112C-T X A R-R01
1 2 3 4

1.Type
T:Top mount

3.Stand off Dimention
A:0mm

2.Contact plating 4.RoHS
B:10u"gold plating
D:Gold Flash

PIN NO.	NAME	TYPE ¹	DESCRIPTION
1	DAT2	I/O/PP	Data Line [bit2]
2	CD/DAT3	I/O/PP	Card Detect Data Line [bit3]
3	CMD	PP	Command Response
4	VDD	S	Supply Votage
5	CLK	I	Clock
6	VSS	S	Supply Voltage Ground
7	DAT0	I/O/PP	Data Line [bit0]
8	DAT1 ²	I/O/PP	Data Line [bit1]

UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND TECHNOLOGY INC. www.attend.com.tw	
ANG.	±5°		
0.	±		
.0	±0.25		
.00	±0.20		
SCALE:	AS SHOWED	UNIT:	mm
DRAWN	willis	2007/4/13	DRAWN NAME:
CHECKED	/ /		Micro SD Socket Hinge Type
APPROVED	/ /		PRODUCT NO.
			112C-TXAR-R01
	SIZE	A4	REV.
			FILE NAME:
			112C-TXAR-R01

													DRAWN		willis		2007/4/13		DRAWN NAME:		Micro SD Socket	
													CHECKED				/ /				Hinge Type	
													APPROVED				/ /		PRODUCT NO.		112C-TXAR-R01	
REV.	DESCRIPTION												DATE			SIZE	A4	REV.	FILE NAME:	112C-TXAR-R01		
	1		2		3		4		5		6		7		8		9		10			