
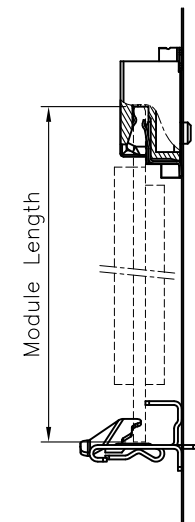
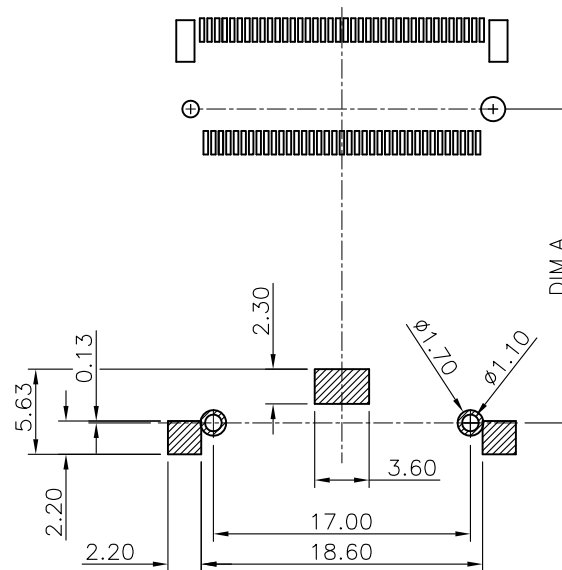
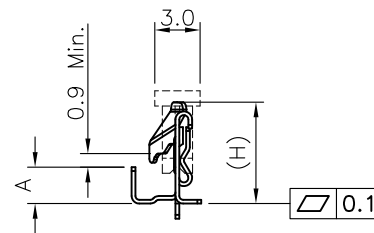
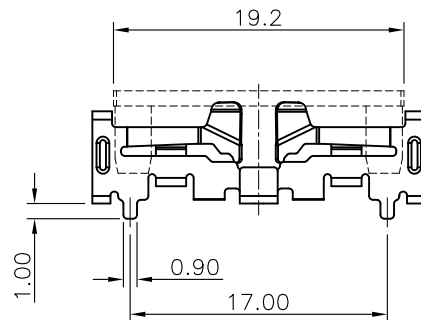


NOTES:

1. Material: stainless steel (SUS301-3/4H) 0.25t
2. Finish: 80~120u" tin plating under 20~40u" nickel plating over all
3. Burr 0.03mm max.
4. Coplanarity is 0.1mm max.
5. RoHS compliant
6. Packaging: tape and reel

REV.	DESCRIPTION	DRAWN	DATE
2	Revised PCB layout, release drawing	FROS	2021/06/23
3	Revised packaging	FROS	2021/08/03
3.1	Revised tolerance	FROS	2021/09/28

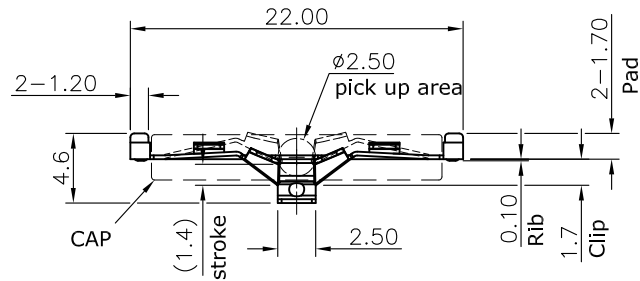

Module Length	DIM.A
42	40.58
60	58.58
80	78.58
110	108.58

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: $\pm 0.05\text{mm}$

How to order:

123A- XX L 1

XX: Connector height
L: Latch
1: serial number

XX	P/N	Dim. A	Dim. H
30	123A- 30 L 1	1.40	5.7
40	123A- 40 L 1	2.40	6.7
58	123A- 58 L 1	4.05	8.4

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw		
UNIT: mm	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN		Fros	2020/12/25	DRAWN NAME: M.2 Latch (30/40/58), Reel		
CHECKED		Tim	2020/12/25			
APPROVED		Ken	2020/12/25	PRODUCT NO.	SEE TABLE	
		SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME 123A-XXL1_B_3.1	