







**15EDGK-3.5**  
**15EDGK-3.81**

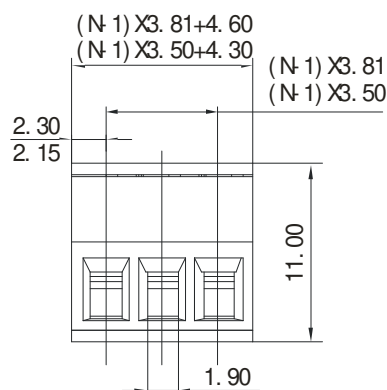


A 向视图

| APPROVAL             |   |                        |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| <b>Electrical</b>    |                                                                                                                                                                         |                        |
| Standard             | <b>UL</b>                                                                                                                                                               | <b>IEC</b>             |
| Rated voltage        | 300V                                                                                                                                                                    | 250V                   |
| Rated current        | 8A                                                                                                                                                                      | 7A                     |
| Wire range           | 28-16AWG                                                                                                                                                                | 0.5-1.5mm <sup>2</sup> |
| Withstanding voltage | AC2000V/1Min                                                                                                                                                            |                        |
| <b>Mechanical</b>    |                                                                                                                                                                         |                        |
| Torque               | 0.2Nm(1.7Lb-In)                                                                                                                                                         |                        |
| Ambient temperature  | -40℃~+105℃                                                                                                                                                              |                        |
| Strip length         | 7mm                                                                                                                                                                     |                        |
| <b>Dimensions</b>    |                                                                                                                                                                         |                        |
| Pitch                | 3.5mm(.138" ) 3.81mm(.150" )                                                                                                                                            |                        |
| Poles                | 2P-24P                                                                                                                                                                  |                        |
| <b>Material</b>      |                                                                                                                                                                         |                        |
| Housing              | PA66,UL94V-0                                                                                                                                                            |                        |
| Screws               | M2,Steel,Cr <sup>3</sup> +Zn-plated                                                                                                                                     |                        |
| Contact              | Phosphor bronze                                                                                                                                                         |                        |
| Cage                 | Brass,Ni-plated                                                                                                                                                         |                        |

### HOW TO ORDER :

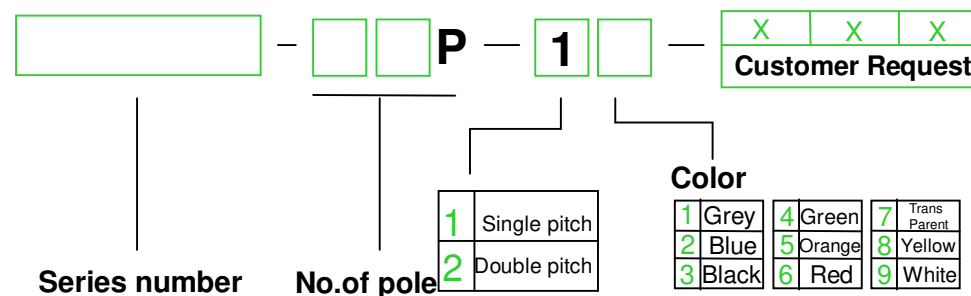

|                                                                                                               |                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <br>mm<br>(INCH)         |  <b>DEGSON ELECTRONICS CO., LTD.</b> |
| <br>THROANGLE PROJECTION | <b>NAME</b><br><b>15EDGK-3.5, 15EDGK-3.81</b>                                                                             |