
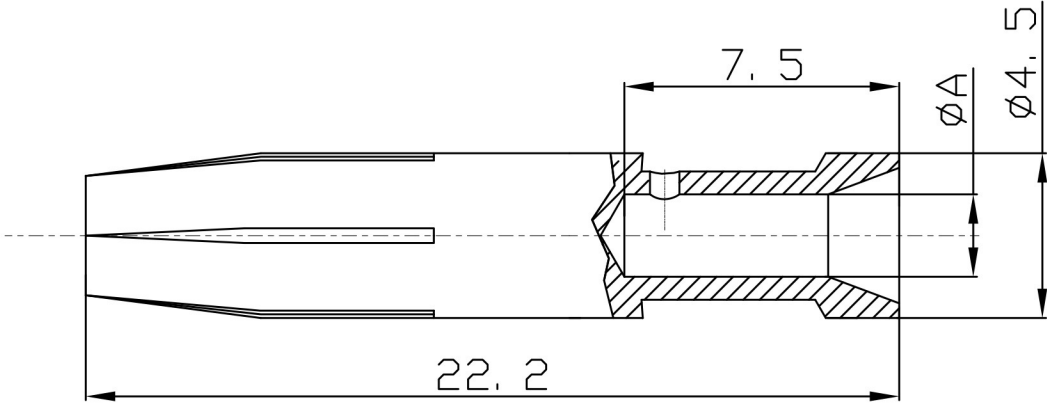



FOR-1351 Rev.1.0		7	6		5		4		3		2		1	
Contacts, silver-plated		(ØA)	Wire gauge		Recommended stripping length		REVISION RECORD							
Type of products			(mm²) (AWG)				REV	ECN	DESCRIPTION		DRFT	DATE		
16A-SF-0.37		0.9	0.14-0.37		26-22		7.5mm							
16A-SF-0.5		1.1	0.50		20		7.5mm							
16A-SF-0.75		1.3	0.75		18		7.5mm							
16A-SF-1.0		1.45	1.00		18		7.5mm							
16A-SF-1.5		1.75	1.50		16		7.5mm							
16A-SF-2.5		2.25	2.50		14		7.5mm							
16A-SF-4.0		2.85	4.00		12		7.5mm							



- Crimp contacts
- 01. Material :Copper alloy
 - 02. Surface :Hard-silver plated
 - 03. Contact resistance :≤1mΩ
 - 04. Terminal :Crimp connection
 - 05. Wire gauge :0.37-4.0mm² (AWG 22-12)
 - 06. Rohs Compliance

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:		NAME: 16A-Female Contacts(Silver-plated)		
	CHKD:				
	DRFT: Mr.Yang 2016.06.06		TITLE: CUSTOMER DRAWING		REV D0
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET 1/1
MM (INCH) DO NOT SCALE DRAWING			SCALE 5: 1		