

Contacts, silver-plated

(ØA)

Wire gauge

Recommended
stripping length

Type of products

(mm²)

(AWG)

REVISION RECORD

REV

ECN

DESCRIPTION

DRFT

DATE

16A-SM-0.37

0.9

0.14-0.37

26-22

7.5mm

16A-SM-0.5

1.1

0.50

20

7.5mm

16A-SM-0.75

1.3

0.75

18

7.5mm

16A-SM-1.0

1.45

1.00

18

7.5mm

16A-SM-1.5

1.75

1.50

16

7.5mm

16A-SM-2.5

2.25

2.50

14

7.5mm


16A-SM-4.0

2.85

4.00

12

7.5mm

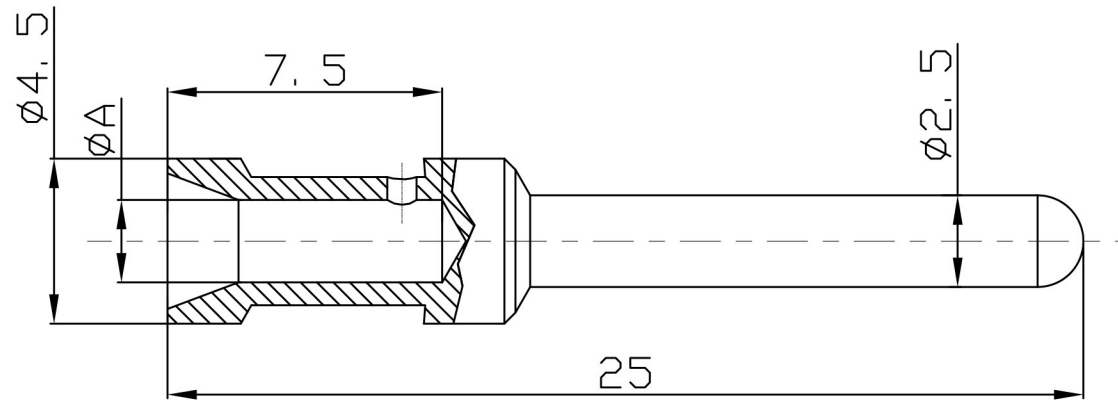

Crimp contacts

01. Material : Copper alloy


02. Surface : Hard-silver plated

03. Contact resistance : $\leq 1\text{m}\Omega$

04. Terminal : Crimp connection

05. Wire gauge : 0.37-4.0mm² (AWG 22-12)

06. Rohs Compliance

DETACHED LISTS	PART NO.: /	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 16A-Male Contacts(Silver-plated)			
	CHKD:				
	DRFT: Mr. Yang 2016.06.06	TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /	SHEET 1/1	SCALE 5:1

MM
(INCH)

DO NOT SCALE DRAWING

SCALE
5:1