

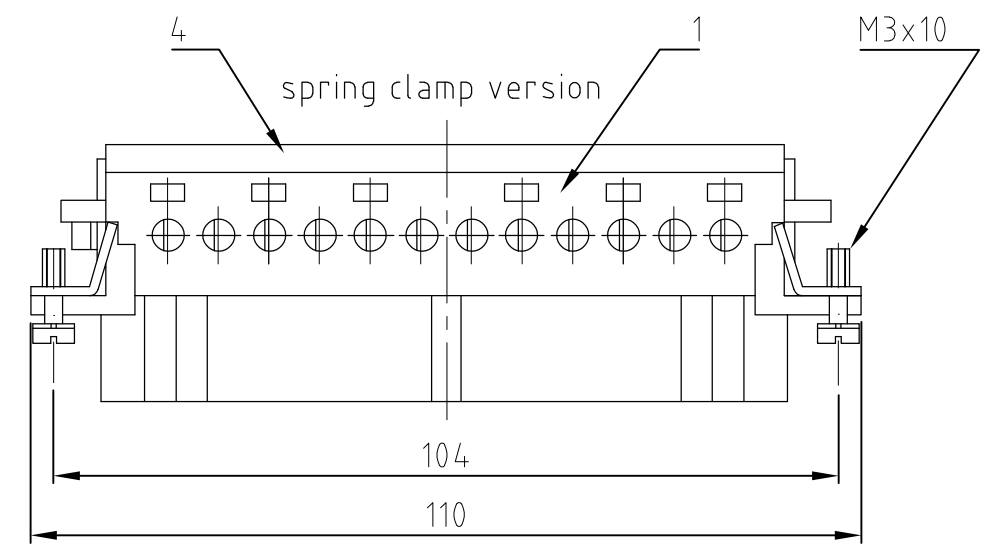
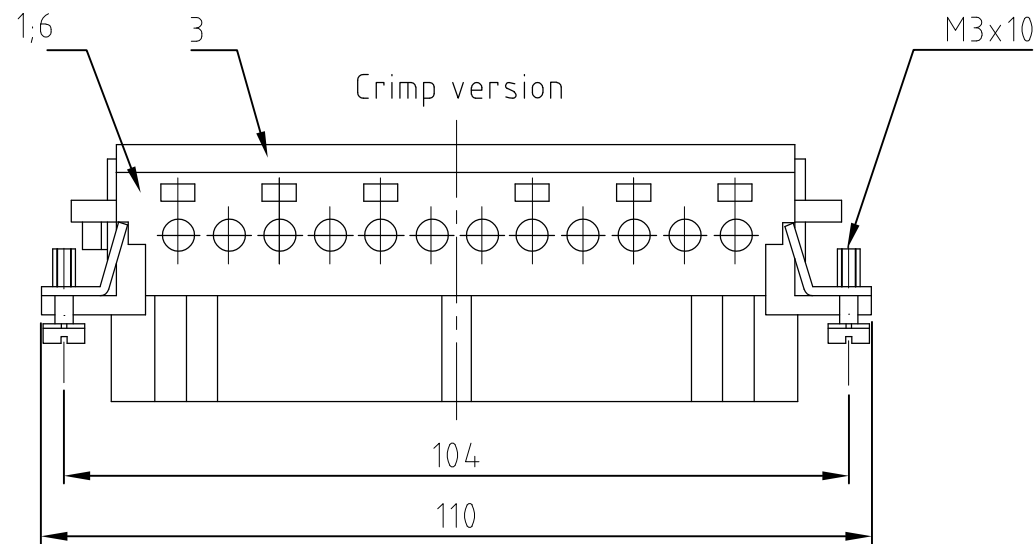


LOC	DIST	REVISIONS					
A1	-	ÄNDERUNGEN					
		P	LTR	DESCRIPTION BESCHREIBUNG	DATE	DWN	APVD
PROJEKT NR.:			E1	text for packaging corrected ECR-08-001868	23.01.08	SR	ST
-							

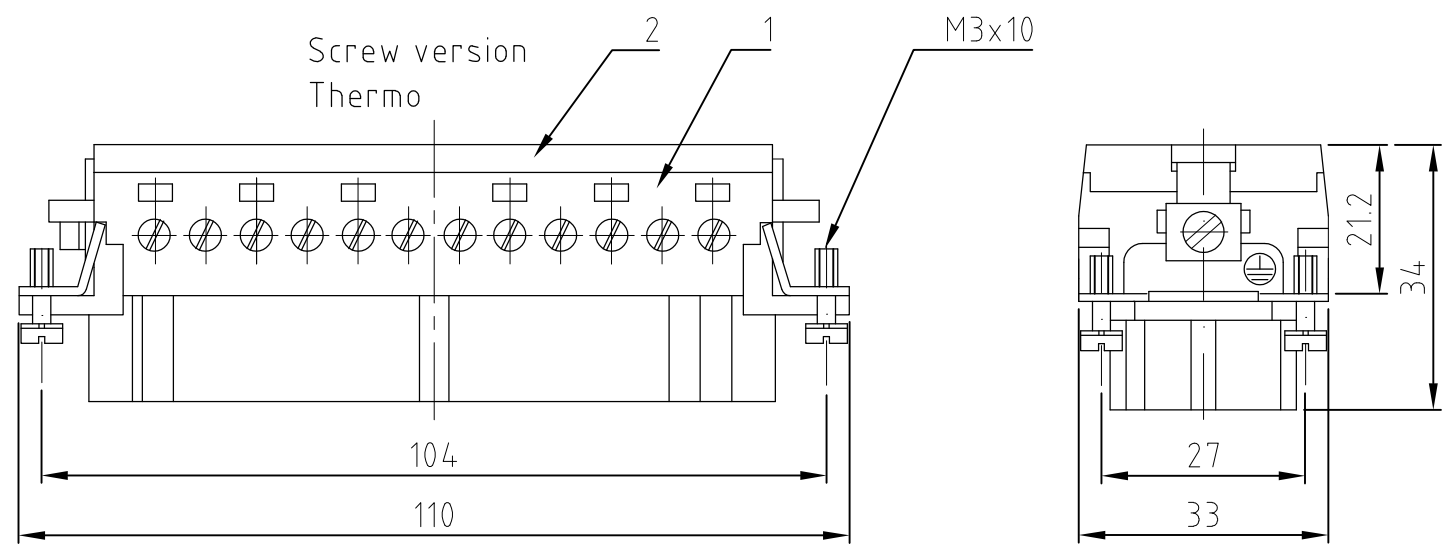


Contact arrangement view from termination side

Printing 1-24 Thermo

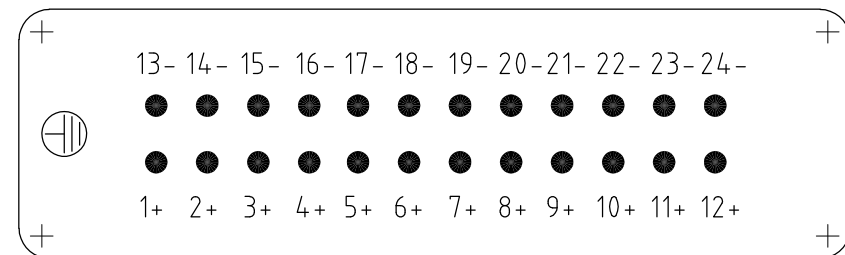


Contact arrangement view from termination side


Printing 1-24

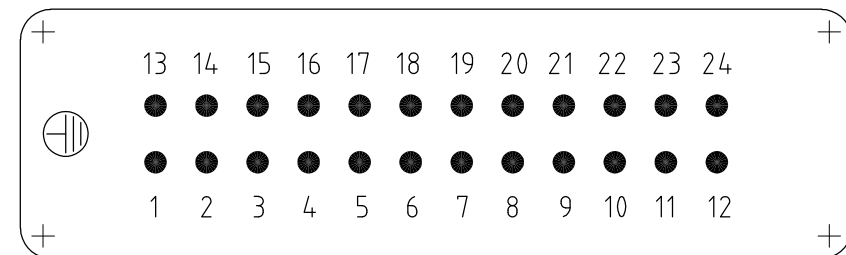


Printing 1-24 Screw

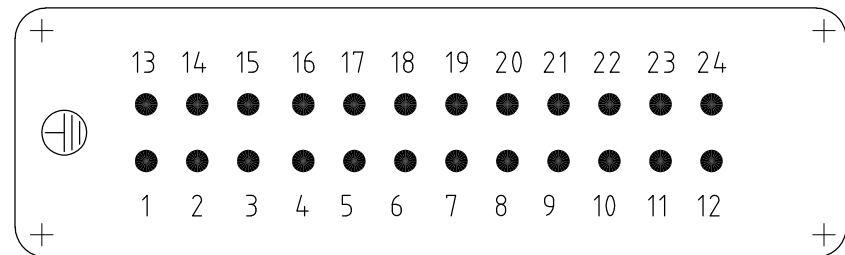

Printing 25-48

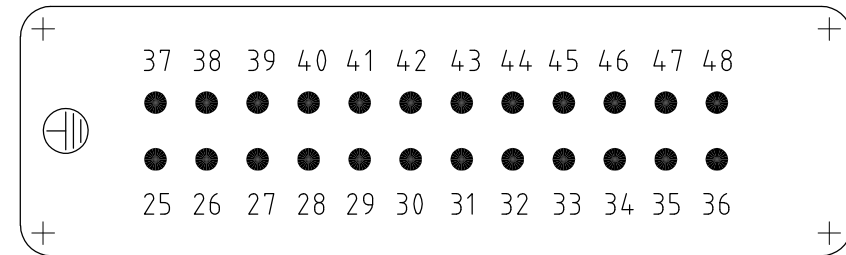

assembly directions

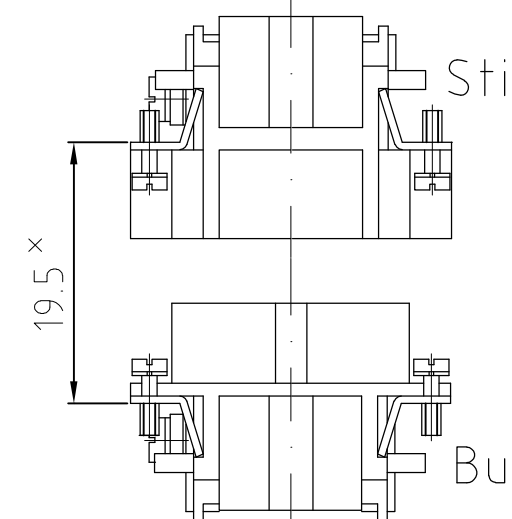

× distance for a safe
contact max: max: 21 mm


NOTES:

- 1 SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM
- 2 SUITABLE HOOD SIZE 8; 12: SERIES HB; HD; HIP; EMV
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264
- 3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm
- 4 STANDARDS:
DIN EN 61984; DIN EN 60664-1


5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED

6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 220 PIECES


Panel cut-out for contact insert when used without housing

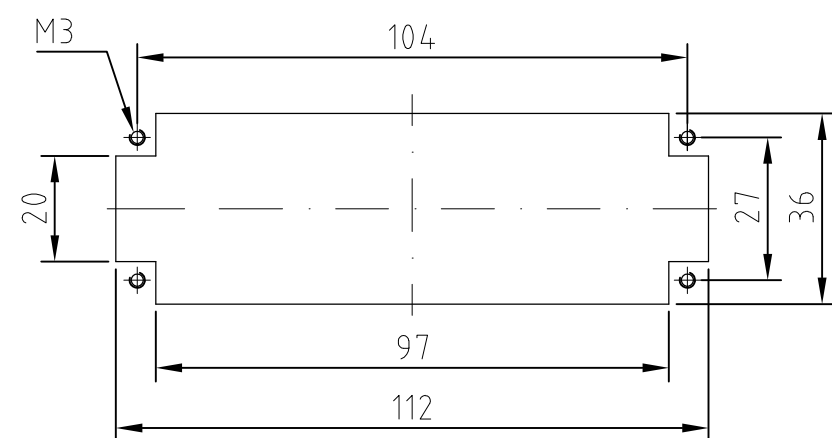

Printing 25-48 Screw

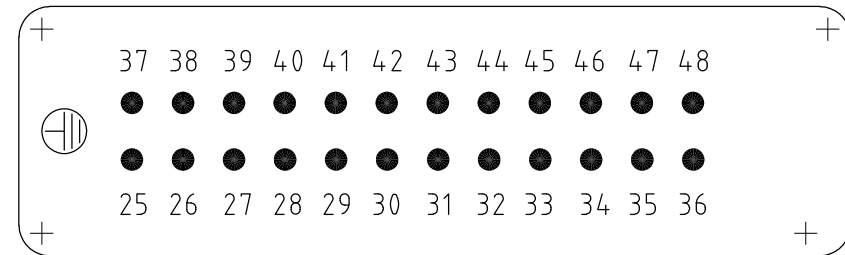

Printing 12+6+6 Screw/Thermo

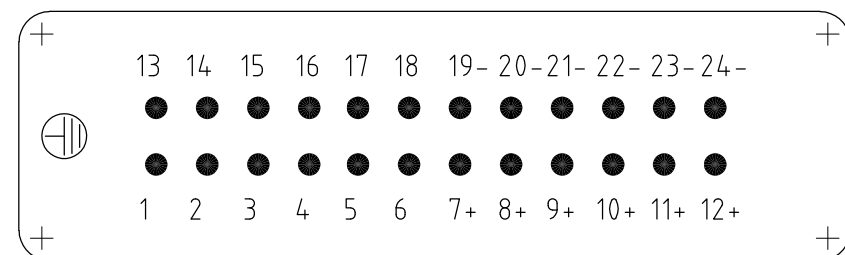[illegible]