

AUTOMOTIVE BLADE FUSE CLIP & HOLDERS

- Available for standard, mini and maxi fuse sizes
- Horizontal and vertical mini blade clips and holders for Littelfuse Low Profile Mini 897 series, Mini 297 or 997 series, Bussmann ATM series fuses or equivalents

- Horizontal and vertical standard blade clips and holders for Littelfuse ATO 257 series and Bussmann ATC series fuses or equivalents
- Vertical maxi blade clips and holders for Littelfuse Maxi 297 series and Bussmann MAX series fuses or equivalent.


- Thru hole PC mountable, maintains position during wave soldering
- Holds fuse securely, even after multiple insertions
- Available with orientation legs to assure proper orientation

"MAXI" AUTOMOTIVE FUSE CLIP & HOLDER

FOR .312 (7.9) × .032 (.80) MAXI BLADE FUSES

For Littelfuse Maxi 297 series/Bussmann Max series or equivalent

- Thru hole PC mountable, maintains position during wave soldering
- Holder design prevents solder wicking
- Withstands the rigors of shock and vibration
- Holds fuse securely, even after multiple insertions




SPECIFICATIONS

Contacts: .020 (.51) thick Copper, Tin Nickel Plate


Insulator: Glass filled Nylon, UL Rated 94V-0

Current Rating: 60 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)

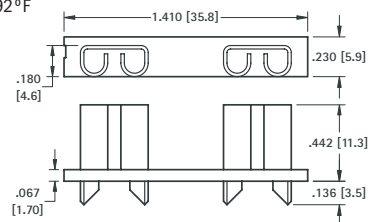

Mounting Detail For Two Clips



CAT. NO. 3555

CAT. NO. 3555-2

MODULAR AUTOMOTIVE BLADE FUSE HOLDERS

FOR .205 (5.2) × .025 (.64) STANDARD BLADE FUSES

For Littelfuse ATO 257 series/Bussmann ATC series or equivalent


SPECIFICATIONS

Contacts: Brass, Tin Plate

Body: Nylon, UL Rated 94V-0

Current Rating: 20 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)

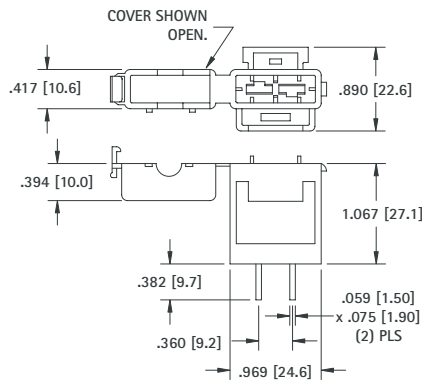

SPECIFICATIONS

Contacts: Brass, Tin Plate


Body: Nylon, UL Rated 94V-0

Current Rating: 20 Amps @ 500V AC


Temperature Rating: -58°F to +292°F (-50°C to +145°C)

- Designed for standard auto blade fuses
- Fully insulated compact design
- Mounts easily in pre-drilled or punched hole
- Holder has pocket to hold spare fuse
- Safety lever release clip will not open under shock or vibration
- Fuses are installed and removed easily
- May be used individually or easily interlocked for multiple mounting

Mounting Detail For Two Holders



Mounting Detail



3560 (Shown with two 3560 holders, interlocked)


3559 (14 gauge wire lead must be cut and spliced for in-line use)

CAT. NO. 3560 (PC Mount)


CAT. NO. 3559 (In Line)




CAT. NO. 3558

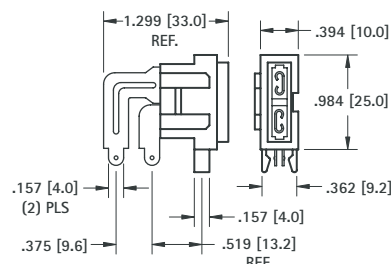

Mounting Detail



Mounting Detail For Two Holders



FOR .205 (5.2) × .025 (.64) STANDARD BLADE FUSES

For Littelfuse ATO 257 series/Bussmann ATC series or equivalent

- Thru hole PC mountable, maintains position during wave soldering
- Holder design prevents solder wicking
- Withstands the rigors of shock and vibration
- Holds fuse securely, even after multiple insertions

VERTICAL FUSE ENTRY


SPECIFICATIONS

Contacts: .016 (.41) thick Brass, Tin Nickel Plate



Insulator: Glass filled Nylon, UL Rated 94V-0

Current Rating: 30 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)



Mounting Detail For Two Clips



CAT. NO. 3522-2

CAT. NO. 3522-3

CAT. NO. 3522

HORIZONTAL FUSE ENTRY

- Designed for low height clearance applications
- Fuse will be inserted parallel to board
- Thru hole PC mountable, maintains position during wave soldering
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time
- Polarized legs assure proper orientation of clips onto board


SPECIFICATIONS

Contacts: .012 (.30) thick Brass, Tin Nickel Plate



Insulator: PBT, UL Rated 94V-0

Current Rating: 30 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)

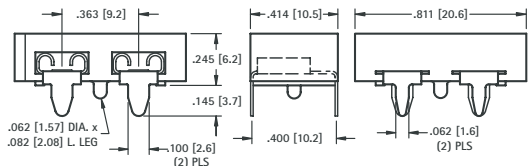

Mounting Detail For Two Clips

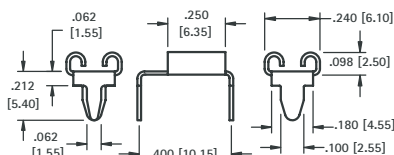


CAT. NO. 3550-2

CAT. NO. 3550


2 IN 1 FUSE HOLDER

For Littelfuse ATO 257 series/Bussmann ATC series, Littelfuse Low Profile Mini 897 series or equivalents

- Accepts Standard Auto Fuses or Low Profile Mini Fuses
- Low insertion force
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time
- Thru hole PC mountable, maintains position during wave soldering



Mounting Detail



SPECIFICATIONS

Contacts: .016 (.41) thick Brass, Tin Nickel Plate

Insulator: PBT, UL Rated 94V-0

Current Rating: 20 Amps @ 500V AC


Temperature Rating: -58°F to +292°F (-50°C to +145°C)

CAT. NO. 3557-2


UNIVERSAL CLIP

For Littelfuse ATO 257 series/Bussmann ATC series, Littelfuse Mini 297 or 997 series/Bussmann ATM series, Littelfuse Low Profile Mini 897 series or equivalents


- Accepts most Auto-Blade Fuses
- Low insertion force
- Thru hole PC mountable, maintains position during wave soldering



Mounting Detail for Standard Auto Fuses and Low Profile Mini Fuse



Mounting Detail for Mini Fuse



SPECIFICATIONS

Contacts: .016 (.41) thick Brass, Tin Nickel Plate

Current Rating: 20 Amps @ 500V AC

CAT. NO. 3557

"MINI" AUTOMOTIVE FUSE CLIPS & HOLDERS

For .110 (2.8) × .032 (.80) MINI BLADE FUSES


For Littelfuse Mini 297 or 997 series/Bussmann ATM series or equivalent

VERTICAL FUSE ENTRY


Thru Hole Mount




- Low Profile



Mounting Detail For Two Clips



Pad Layout For Two Clips




CAT. NO. 3564

AVAILABLE ON TAPE AND REEL

Surface Mount



- Low Profile



CAT. NO. 3563 (Bulk)

CAT. NO. 3563TR (Tape & Reel)

Tape & Reel Spec's: 24mm wide; 12mm pitch; 13 inch reel (1500 pieces per reel)


SPECIFICATIONS

Material: .012 (.30) thick Brass, Tin Nickel Plate


Insulator: Glass filled Nylon, UL Rated 94V-0

Current Rating: 30 Amps @ 500V AC


Temperature Rating: -58°F to +292°F (-50°C to +145°C)



Mounting Detail For Two Clips



CAT. NO. 3544



CAT. NO. 3544-2

LOW PROFILE MINI FUSE HOLDER

For Littelfuse Low Profile Mini 897 series or equivalent

- Low insertion force
- Thru hole PC mountable, maintains position during wave soldering
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time


SPECIFICATIONS

Contacts: .016 (.41) thick Brass, Tin Nickel Plate


Insulator: PBT, UL Rated 94V-0

Current Rating: 20 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)




Mounting Detail



Refer to page 35 for Cat. No. 3557 Clip details


Mounting Detail



CAT. NO. 3557-2

MINI FUSE HOLDER

For Littelfuse Mini 297 or 997 series/Bussmann ATM or equivalents



CAT. NO. 3568

HORIZONTAL FUSE ENTRY

For Littelfuse Mini 297 or 997 series/Bussmann ATM series or equivalent


SPECIFICATIONS

Contacts: .012 (.30) thick Brass, Tin Nickel Plate


Insulator: PBT, UL Rated 94V-0

Current Rating: 30 Amps @ 500V AC


Temperature Rating: -58°F to +292°F (-50°C to +145°C)

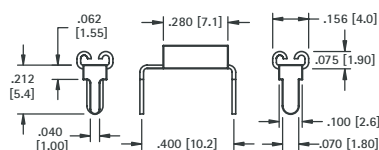

Mounting Detail For Two Clips



CAT. NO. 3549

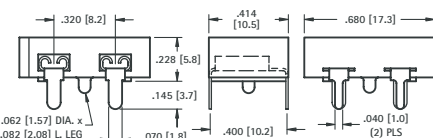

CAT. NO. 3549-2

