

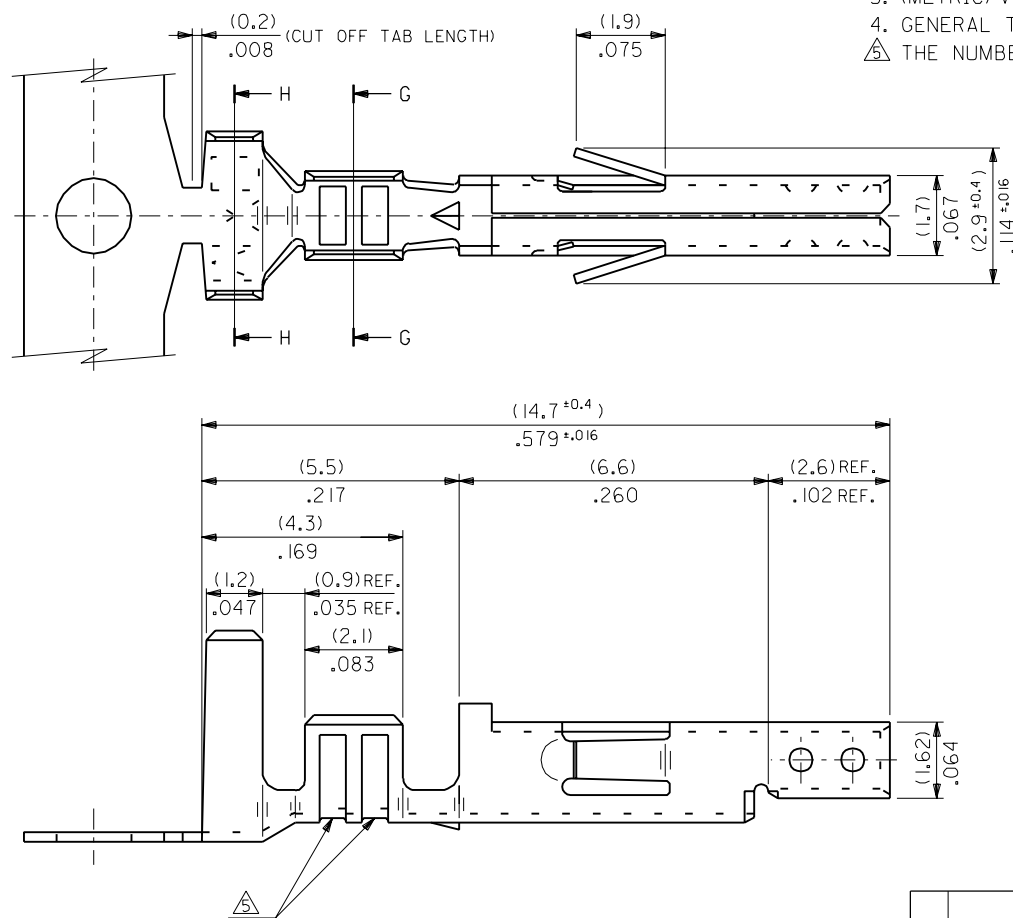



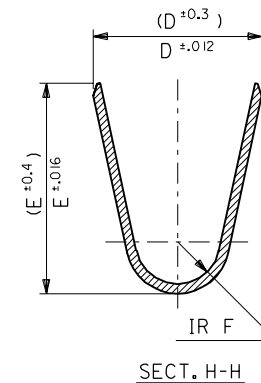

NOTES

1. APPLICABLE HOUSING : 5557 SERIES.
 2. MATES WITH TERMINAL : 5558, 5566, 5569 SERIES.
 3. (METRIC) VALUES SHOWN GOVERN OVER ENGLISH CONVERSION VALUES.
 4. GENERAL TOLERANCES OF ENGLISH CONVERSION VALUES : $\pm .008$ INCH.
-  THE NUMBER OF SERRATIONS TO BE ONE FOR WIRE RANGE #22-28.



								材料 MATERIAL		SEE SHEET 2 OF 2		molex MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社		
								仕上げ FINISH		SEE SHEET 2 OF 2		EDP. NO. SEE SHEET 2 OF 2		
角度 ANGLE	+3°	H	REVISED	(JC90012)	Y.K. S.K.	'98/11/6	適用電線範囲 WIRE RANGE		SEE SHEET 2 OF 2		ENG. NO. SHEET 1 OF 2 SD-5556****		REV J	
30 以上 OVER	+0.3	G	REVISED	(JC80619)	Y.K. S.K.	'98/7/6	被覆外径 INS. RANGE		SEE SHEET 2 OF 2					
10 以上 30 未満 OVER UNDER	+0.25	F	REVISED & REDRAWN	(J1038 D)	H.H.	'98/5/6	DRAWN BY '91/5/18 H. HIRAMOTO		CHK'D BY '98/11/9 K.T. S.KUNISHI		TITLE 名称 NEW MINI.FIT CONN. CRIMP RECEPTACLE			
10 未満 UNDER	+0.2	記号 LTR 変更内容 REVISION RECORD		(J1038 D)	DR. CHK.	日付 DATE	APP'D BY '98/11/9 M.FUKUSHIMA		尺度 SCALE 10 - 1					
GENERAL TOLERANCES		REVISE ONLY ON CAD SYSTEM												

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス(株)の所有する情報を含むもので 当社の許可なく複製を禁止する。

8

7

6

5

4

3

2

1

TIN OVER NICKEL PLATED PHOSPHOR BRONZE	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	∅ (3.1) .122 MAX.	# 16	39-00-0119	5556 PBS3L	LOOSE
	(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9-1.8) .035-.071	#22-28	↑ -0118	↑ PBS3	CHAIN
	(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3-3.1) .051-.122	# 18-24	-0117	PBS2L	LOOSE
									-0116	PBS2	CHAIN
TIN PLATED PHOSPHOR BRONZE	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	∅ (3.1) .122 MAX.	# 16	-0115	PBSL	LOOSE
	(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9-1.8) .035-.071	#22-28	-0114	PBS	CHAIN
	(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3-3.1) .051-.122	# 18-24	-0080	PBT3L	LOOSE
									-0079	PBT3	CHAIN
TIN OVER NICKEL PLATED BRASS	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	∅ (3.1) .122 MAX.	# 16	-0066	PBT2L	LOOSE
	(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9-1.8) .035-.071	#22-28	-0065	PBT2	CHAIN
	(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3-3.1) .051-.122	# 18-24	-0060	PBTL	LOOSE
									-0059	PBT	CHAIN
TIN OVER COPPER PLATED BRASS	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	∅ (3.1) .122 MAX.	# 16	-0113	S3L	LOOSE
	(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9-1.8) .035-.071	#22-28	-0112	S3	CHAIN
	(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3-3.1) .051-.122	# 18-24	-0111	S2L	LOOSE
									-0110	S2	CHAIN
MATERIAL	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	∅ (3.1) .122 MAX.	# 16	-0109	SL	LOOSE
	(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9-1.8) .035-.071	#22-28	-0108	S	CHAIN
	(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3-3.1) .051-.122	# 18-24	-0078	T3L	LOOSE
									-0077	T3	CHAIN
MATERIAL	(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9-1.8) .035-.071	#22-28	-0047	T2L	LOOSE
	(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3-3.1) .051-.122	# 18-24	-0046	T2	CHAIN
									↓ -0039	↓ TL	LOOSE
									39-00-0038	5556 T	CHAIN
MATERIAL	F	E	D	C	B	A	INS. RANGE	WIRE RANGE	EDP NO.	ENG. NO.	FORM

材料 MATERIAL		SEE CHART	材料 MOLEX-JAPAN CO.,LTD.	
THICKNESS : (0.203)/.008			日本モレックス株式会社	
仕上げ FINISH		SEE CHART	EDP. NO.	
適用電線範囲 WIRE RANGE		SEE CHART	SEE CHART	
被覆外径 INS. RANGE		SEE CHART	ENG. NO.	
DRAWN BY 9/5/18 H.HIRAMOTO		CHK'D BY 98/11/9 K.T.S.KUNISHI	SHEET 2 OF 2	
APP'D BY 98/11/9 M.FUKUSHIMA		尺 度 SCALE 10 - 1	SD-5556****	
TITLE 名称 NEW MINI. FIT CONN.			REV J	
CRIMP RECEPTACLE				