

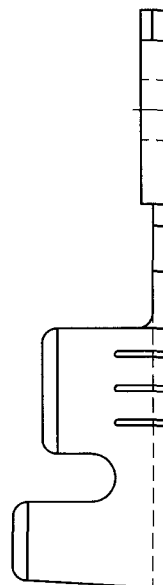


A B C D E F G H

REV DESCRIPTION DATE

△ RDK-95064

施秉辰 2006/05/03

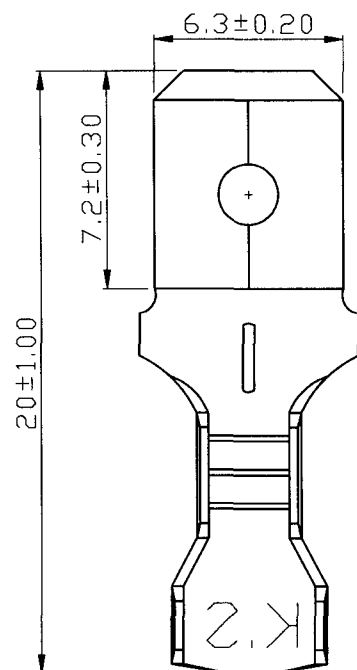

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	10	15
2. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
3. NEMA TAB : 0.032 inch * 0.250 inch (0.8 mm * 6.35 mm)
4. SURFACE TREATMENT :
LR : LOOSE PIECE, STANDARD CHEMICAL TREATMENT
LT : LOOSE PIECE, TIN PLATED
5. THICKNESS : 0.40 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

NAME	OPEN BARREL TERMINALS (FEMALE & MALE)				UNIT	7"
PART NO.	See Chart	MATERIAL	BRASS	APPROVE		
NUMBER	KT-92023-C	SCALE	SHEET	PAGE	CHECKED	楊發為
DATE	2004/12/24	4/1	1-1	1DF1	DRAWN	張馨尹

ITEM NO.
501LR
501LT

KST. K.S. TERMINALS INC.

A B C D E F G H