
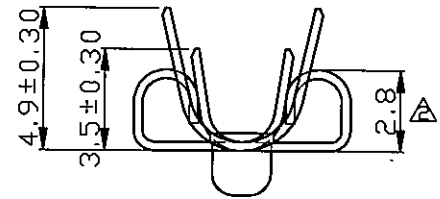
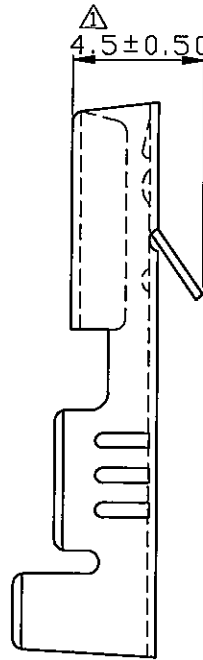


REV	DESCRIPTION	DATE
△ 97033		張馨尹 2008/05/14
△ RDCM-101242		柯棟耀 2012/12/06

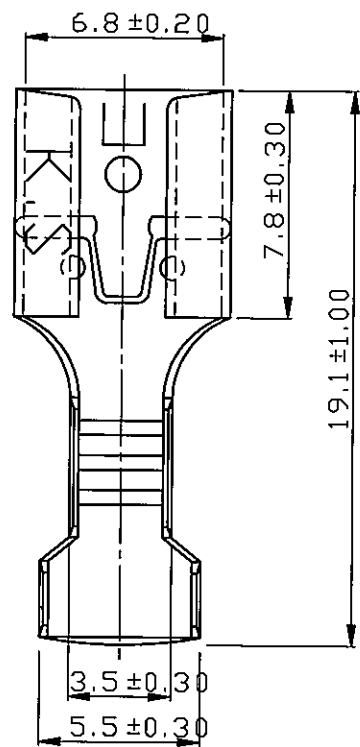

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	10	15
2. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
3. NEMA TAB : 0.032 inch * 0.250 inch (0.8 mm * 6.35 mm)
4. SURFACE TREATMENT :
LR : LOOSE PIECE, STANDARD CHEMICAL TREATMENT
LT : LOOSE PIECE, TIN PLATED
5. THICKNESS : 0.30 mm

Tolerance Unless Otherwise Specified	
0 > 10 mm ± 0.40	ANGLE
10 > 20 mm ± 0.80	0° > ° REF ±
> mm ±	° > ° ±
> mm ±	° > ° ±

NAME	OPEN BARREL DISCONNECTORS			UNIT	mm	⊕	⊖
PART NO.	See Chart	MATERIAL	BRASS	APPROVE	張馨尹		
NUMBER	KT-94117-C	SCALE	SHEET	PAGE	CHECKED	張馨尹	
DATE	2007/05/30	4/1	1-2	10F1	DRAWN	張馨尹	

ITEM NO.
601LR
601LT

KST. K.S. TERMINALS INC.