

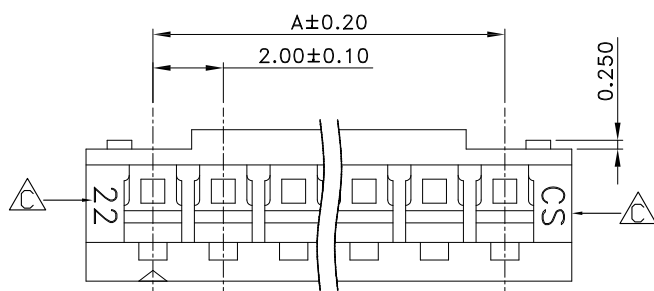
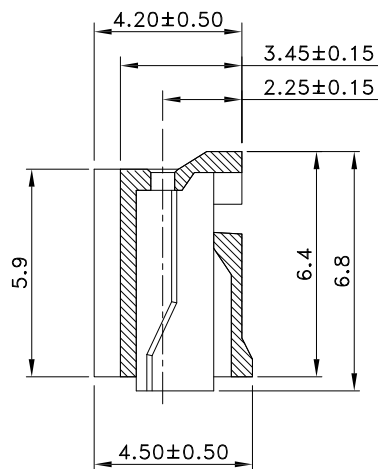


SPECIFICATIONS


Current Rating : 2A AC/DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Withstanding voltage : 800V AC/minute
Rating voltage : 100V AC/DC
Contact Resistance : $20\text{m}\Omega$ Max
Insulation Resistance : $1000\text{M}\Omega$ Min
Material: NYLON 66, UL94V-0

721-7 5-xx W 009
1 2 3 4

- 7: Green Product
9: Green Product High Temp
- xx: No. of contacts
- W: White insulator
- Pinrex internal code.

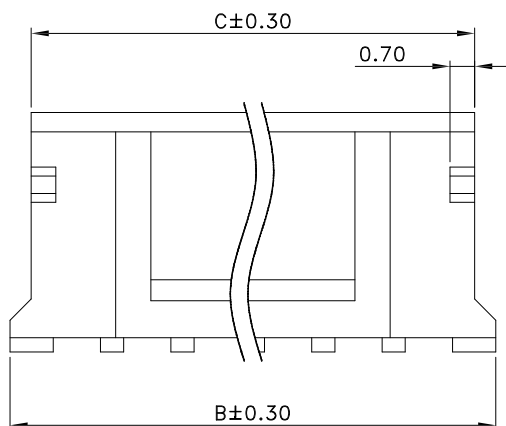

3P APPEARENCE



2P APPEARENCE

Poles	Dimension(mm)		
	A	B	C
2	2.00	5.80	4.60
3	4.00	7.80	6.60
4	6.00	9.80	8.60
5	8.00	11.80	10.60
6	10.00	13.80	12.60
7	12.00	15.80	14.60
8	14.00	17.80	16.60
9	16.00	19.80	18.60
10	18.00	21.80	20.60
11	20.00	23.80	22.60
12	22.00	25.80	24.60
13	24.00	27.80	26.60
14	26.00	29.80	28.60
15	28.00	31.80	30.60
16	30.00	33.80	32.60

			TOLERANCE				OLD PART NO.		TITLE 2.0mm Crimp Style Connectors Hosing		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
C	UPDATE	2023/01/12	.0	=±.30	UNITS : mm		DRAWER 罗苗苗	CHECK 李创			
B	UPDATE	2020/07/14	.00	=±.20	SCALE NONE SIZE A4		SHEET 1 OF 1 REV. C		APP'd 李创		
A	RELEASE	2012/01/13	.0000	=±.xxx							
REV.	DESCRIPTION	DATE	.0000=±.	ANG.=±3'	NEW PART NO. 721-75-xxW009						DRAW NO. 721-75-xxW009(C版)