

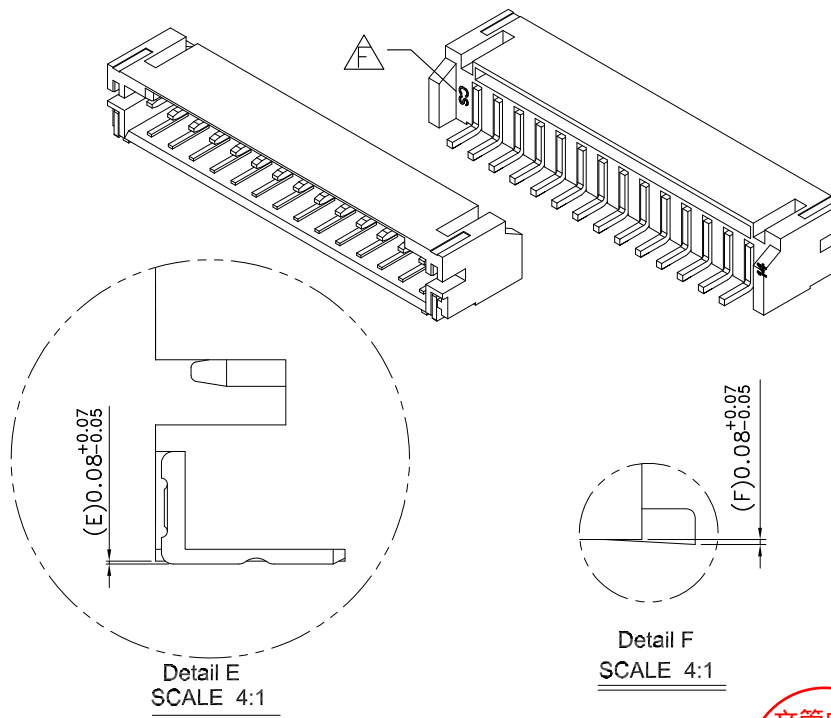
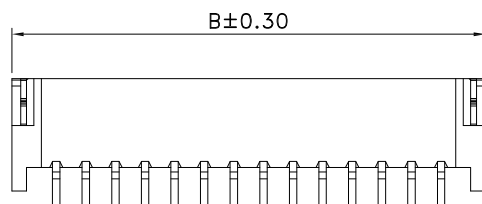
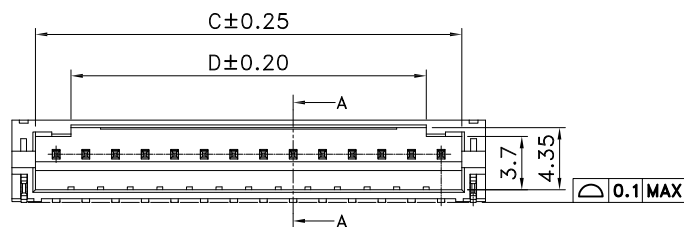
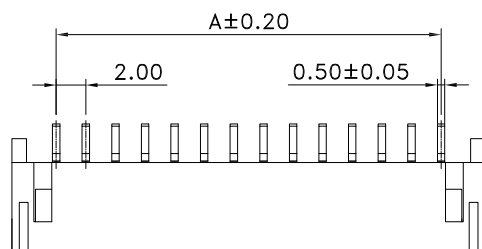
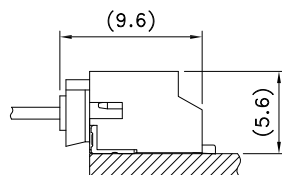


RECOMMENDED PCB LAYOUT DIM.
General tolerance ± 0.05



Detail E
SCALE 4:1

Detail F
SCALE 4:1

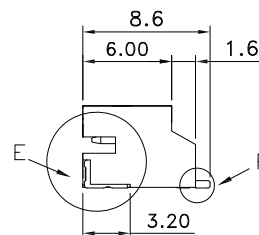

RECOMMENDED ASSEMBLY DIM.

Material with Halogen Free

SPECIFICATIONS

Voltage Rating : 100V AC/DC
Current Rating : 2A AC/DC
Withstanding Voltage : 800V AC/minute
Insulation Resistance : 1,000M Ω min
Temperature Range : - 40 $^{\circ}$ C to + 105 $^{\circ}$ C
Contact Resistance : 20m Ω max

Material :

Insulator: PA9T UL94V-0

Contact: Copper Alloy

Solder Tab: Copper Alloy

721-9 4-xx T W R9
1 2 3 4 5 6

- 9: Green Product High Temp
- 4: SMT R/A
- No. of contacts per row
- G: Gold flash
T: Tin plated
- W: White insulator
- Pinrex internal code.



Poles	Dimensions(mm)			
	A	B	C	D
2	2.00	8.00	4.80	1.00
3	4.00	10.00	6.80	2.00
4	6.00	12.00	8.80	4.00
5	8.00	14.00	10.80	6.00
6	10.00	16.00	12.80	8.00
7	12.00	18.00	14.80	10.00
8	14.00	20.00	16.80	12.00
9	16.00	22.00	18.80	14.00
10	18.00	24.00	20.80	16.00
11	20.00	26.00	22.80	18.00
12	22.00	28.00	24.80	20.00
13	24.00	30.00	26.80	22.00
14	26.00	32.00	28.80	24.00
15	28.00	34.00	30.80	26.00
16	30.00	36.00	32.80	28.00

P 頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO. 721-94-xxTWR9(F版)

F	增加PIN序、模穴号	2023/01/13	TOLERANCE
E	UPDATE	2020/05/05	.0 = ± 0.30
D	修正圖面	2018/03/22	.00 = ± 0.20
C	修改尺寸:5.6-->5.5, 增加尺寸标示	2016/09/02	.000 = ± 0.000
B	修改尺寸:3.60-->3.7	2013/01/22	.0000 = ± 0.0000
REV.	DESCRIPTION	DATE	ANG. = $\pm 3^{\circ}$

UNITS : mm
SCALE NONE
SIZE A4

OLD PART NO.	DRAWER 罗苗苗		CHECK 李劍
SHEET 1 OF 1	REV. F	APP'D 李劍	

TITLE	2.0mm WIRE TO BOARD HEADER SMT 90 $^{\circ}$ TYPE, REEL
NEW PART NO.	721-94-xxTWR9