


Digital output ► 24 VDC ► high-side switching ► 0.5 A



750-530

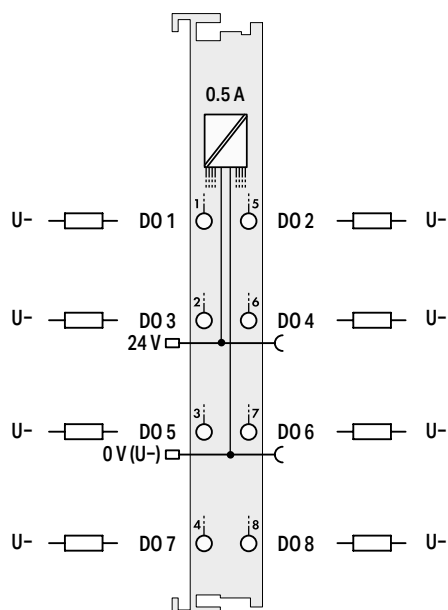

Item description	8-Channel Digital Output; 24 VDC; 0.5 A		
Version	Standard	ext. temperature	pluggable (delivery without connector)
Item no.	750-530	750-530/025-000	753-530
Order Text	8DO; 24 VDC; 0.5A	8DO; 24 VDC; 0.5A; T	8DO; 24 VDC; 0.5A
Technical data			
Pluggable connector	fixed		pluggable
Number of digital outputs	8		
Signal type	Digital		
Signal type (voltage)	24 VDC		
Output characteristic	high-side switching		
Output current per channel	0.5 A		
Output current	short-circuit-protected		
Load type	Resistive, inductive, lamp load		
Actuator connection	8 x (1-wire)		
Switching frequency (max.)	2 kHz		
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		
Current consumption, field supply (module with no external load)	15 mA		
Current consumption (5 V system supply)	25 mA		
Output data width (internal) max.	8 bits		
Isolation	500 V system/field		
Ambient temperature (operation)	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C
Dimensions W x H x D	(12 x 100 x 67.8) mm		(12 x 100 x 69) mm
Approvals	CE; Marine; OrdLoc/HazLoc; ATEX/IECEx		
For data sheet and additional information, see:	wago.com/750-530		wago.com/753-530
Accessories	Item no.	Item no.	Item no.
Plug	-	-	753-110