


Analog output ► 0 ... 10 V

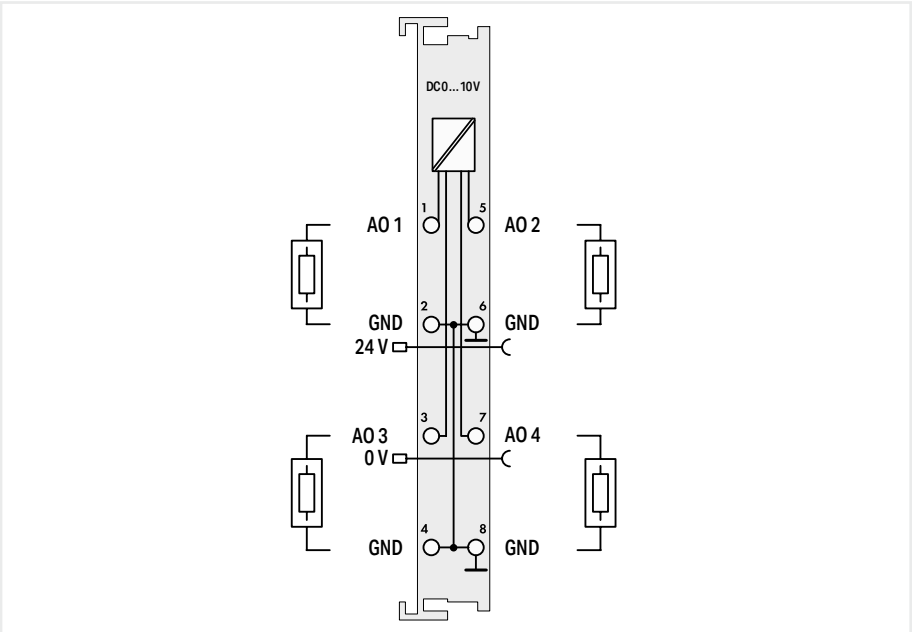

Item description		4-Channel Analog Output; 0 ... 10 VDC		
Version		Standard	ext. temperature	pluggable (delivery without connector)
Item no.		750-559	750-559/025-000	753-559
Order Text		4AO; 0-10 VDC	4AO; 0-10 VDC; T	4AO; 0-10 VDC
Technical data				
Pluggable connector		-		
Number of analog outputs		4		
Signal type		Voltage		
Signal type (voltage)		0 ... 10 VDC		
Actuator connection		4 x (2-wire)		
Load impedance (voltage output)		≥ 5 kΩ		
Resolution [bit]		12 bits		
Conversion time (typ.)		10 ms		
Output error, reference temperature		25 °C		
Output error, deviation (max.) of the upper-range value		0.1 %		
Temperature error (max.) of the output range value		0.01 %/K		
Supply voltage (field)		24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		
Current consumption (5 V system supply)		125 mA		
Data width		4 x 16-bit data; 4 x 8-bit control/status (optional)		
Isolation		500 V system/field		
Ambient temperature (operation)		0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C
Dimensions W x H x D		(12 x 100 x 69.8) mm		
Approvals		CE, IEC, Marine, OrdLoc/HazLoc, ATEX/IECEx		
For data sheet and additional information, see:		wago.com/750-559		
Accessories		wago.com/753-559		
Plug				
		Item no.	Item no.	Item no.
		-	-	753-110