


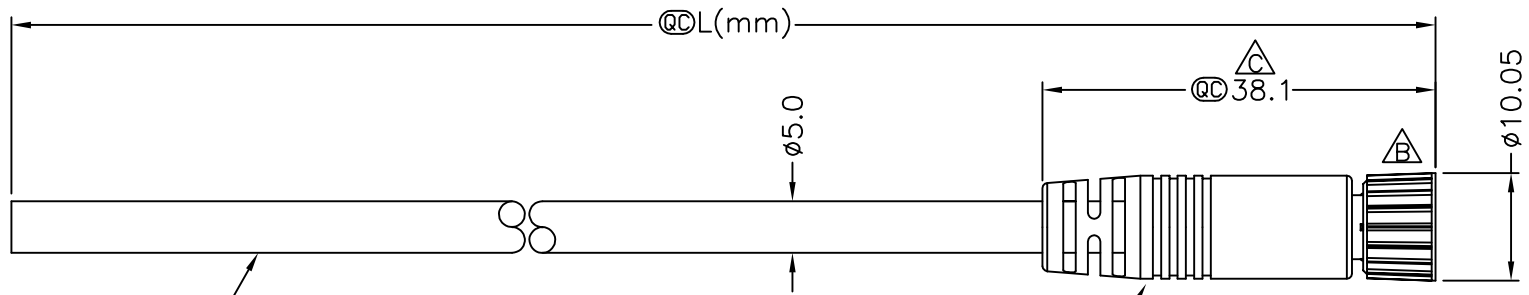


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-710104~106	2007/01/12	Cloud	Change Nut BAB0040NI00 To BEA00010016.
C	LEN-920222~225	2009/02/06	Vicky	Update the drawing.

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.




Conn.



8-04AFFM-SL7AXX
XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters

- Notes:
- * @C Important Dimension.
 - * Waterproof Rate:IP67.
 - * Connector:Black,PU.
 - * Female Pin:Copper Alloy,Gold Plated.
 - * Cable:UL2464 22AWG*4C+Talcum,Black, PVC Jacket,UV Resistant,OD=5.0mm.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin Assignments
Front View

4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕
Conn.	Wire Color	
Pin Out		

UNIT:mm		TITLE	M8 Conn
TOLERANCE		Cable Screw 4P F Conn F Pin	
±0.5 mm	SCALE	Free	SHEET 1 OF 1
	REV.	C	SIZE A4
			@C :Inspection Item

Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY	DATE
		DWG NO	CHECKED BY	DATE
		CUSTOMER	APPROVED BY	DATE
		8-04AFFM-SL7AXX	Vicky	2009/02/06
		ALTW	Ivan	2009/02/06
			Luke	2009/02/06

1
2
3
4
5
6
7
8
F
E
D
C
B
A