


Right angle pin connectors, solder tail

Technical Specs:

Insulator:	Black glass filled polyester PBT-GF30-FR
Flammability:	UL 94V-O
Contact:	Brass CuZn36Pb3 (C36000)
Connecting pin Ø:	0.76 mm
Mechanical life:	min 500 cycles
Rated current:	3 A
Dielectric strength:	min 1000 V _{RMS}

For corresponding socket connectors see pages 59-73

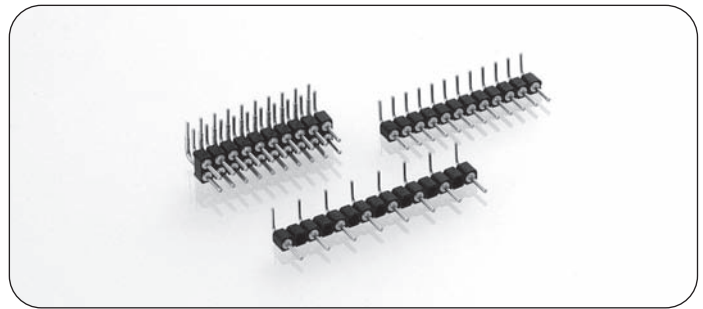


Ordering information

PP Plating code	Termination	Connecting pin
10	Gold 0.25 µm	Gold 0.25 µm
90	Tin	Tin
Z1	Tin	Gold 0.25 µm

Other plating on request see page 146 for plating specs


NNN number of poles. Replace **NNN** with the requested number of poles, e.g. 800-10-**NNN**-20-001001 for a single row version with 8 pins becomes 800-10-**008**-20-001001

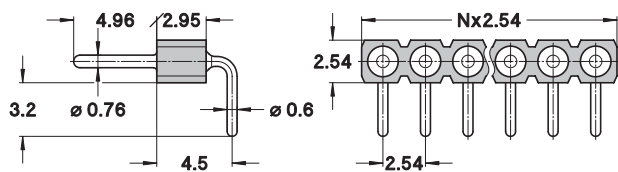

800-PP-NNN-20-001001

Right angle pin connector: solder tail, single row


Availability from: 2 to 64 contacts
Standard number of contacts 25, 60 and 64

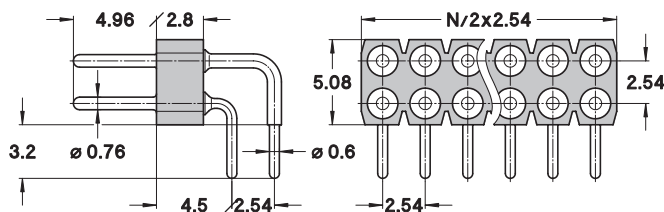

802-PP-NNN-20-001001

Right angle pin connector: solder tail, double row

Availability from: 4 to 72 contacts
Standard number of contacts 40, 56, 60, 64 and 72

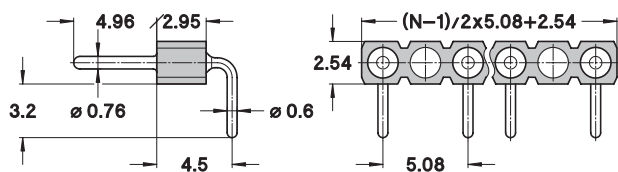

800-PP-YYY-20-101001

Right angle pin connector: solder tail, single row, partially equipped 5.08 mm

Availability from: 2 to 32 contacts

YYY number of poles:
please consult for ordering code