


Ultraminiature PCB pin connectors, solder tail, right angle

Technical Specs:

Insulator:	Black glass filled polyester PCT-GF30-FR
Flammability:	UL 94V-O
Contact:	Brass CuZn36Pb3 (C36000)
Connecting pin Ø:	0.41 mm
Mechanical life:	min 500 cycles
Rated current:	1 A
Dielectric strength:	min 1000 V _{RMS}

For corresponding socket connectors see pages 20-24


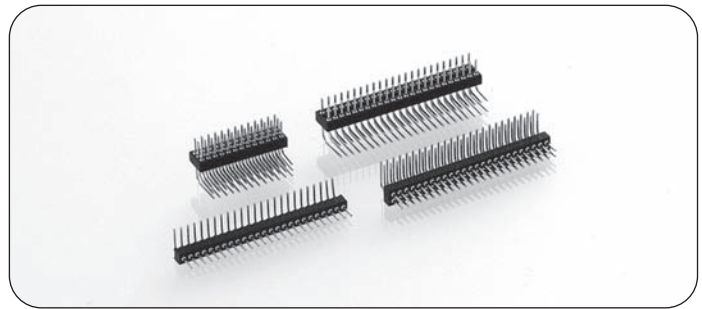


Ordering information

PP Plating code	Termination	Connecting pin
10	Gold 0.25 µm	Gold 0.25 µm
90	Tin	Tin

Other plating on request see page 146 for plating specs



NNN number of poles. Replace **NNN** with the requested number of poles, e.g. 852-10-**NNN**-20-001101 for a double row version with 16 pins becomes 852-10-**016**-20-001101



850-PP-NNN-20-001101

Right angle pin connector: solder tail, single row



Availability from: 2 to 50 contacts
Standard number of contacts 25 and 50



852-PP-NNN-20-001101

Right angle pin connector: solder tail, double row



Availability from: 4 to 100 contacts
Standard number of contacts 50 and 100



852-PP-NNN-20-002101

Right angle pin connector: solder tail, double row with 2.54 mm row to row distance

Availability from: 4 to 100 contacts
Standard number of contacts 100



854-PP-NNN-20-001101

Right angle pin connector: solder tail, triple row

Availability from: 6 to 150 contacts
Standard number of contacts 150