


Series 850

PCB connectors 1.27 mm

Single row / double row / triple row


Solder tail

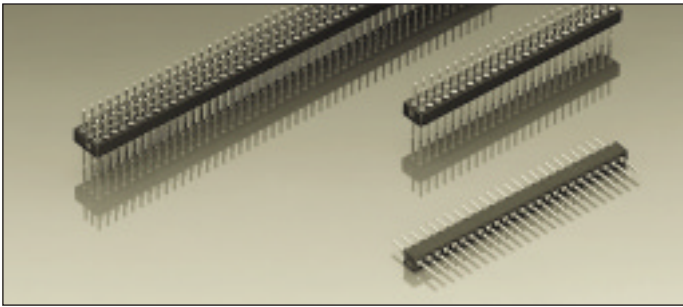

**Ultraminiature PCB
pin connectors, solder tail**

Grid spacing 1.27×1.27 mm

Screw-machined pin $\varnothing 0.43$ mm




For corresponding receptacles see pages 10, 11 and 12

Platings	Sleeve 	Clip 	Pin 
10 90			0.25 μ m Au 5 μ m Sn Pb

Ordering information

Replace **xxx** with the number of poles, e.g. 852-10-**xxx**-10-001 for a double row version with 8 pins per row becomes:
852-10-**016**-10-001

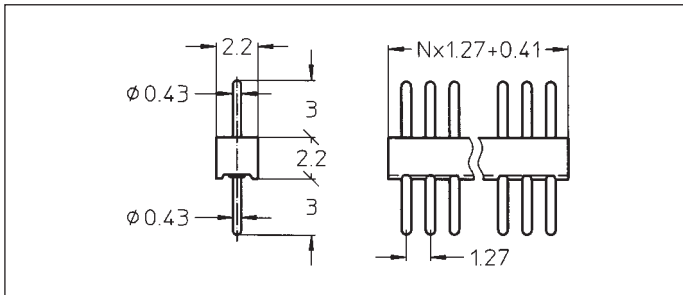


850-10-xxx-10-001

850-90-xxx-10-001

Straight pin connector: solder tail, single row

Availability from: 1 to 50 contacts
Standard number of contacts 25 and 50

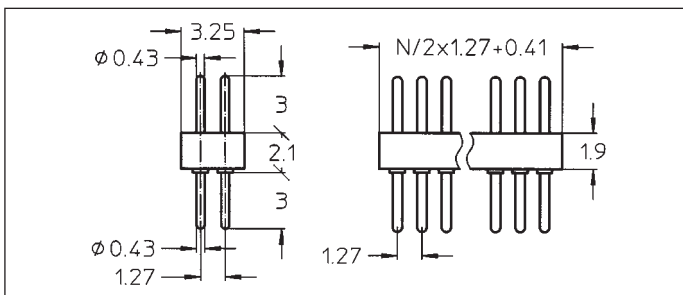


852-10-xxx-10-001

852-90-xxx-10-001

Straight pin connector: solder tail, double row

Availability from: 4 to 100 contacts
Standard number of contacts 50 and 100

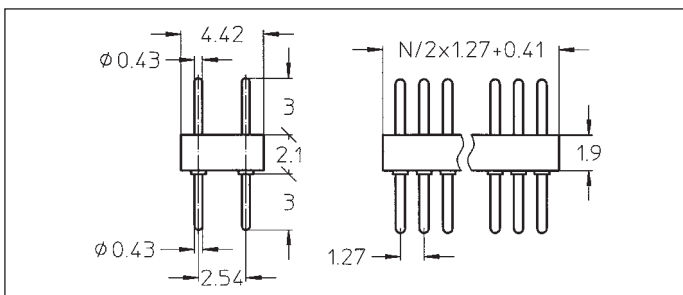


852-10-xxx-10-002

852-90-xxx-10-002

Straight pin connector: solder tail, double row with 2.54 mm row to row distance

Availability from: 4 to 100 contacts
Standard number of contacts 100

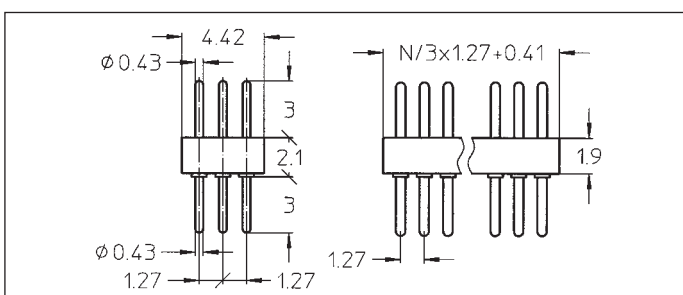

854-10-xxx-10-001

854-90-xxx-10-001

Straight pin connector: solder tail, triple row

Availability from: 9 to 150 contacts
Standard number of contacts 150