
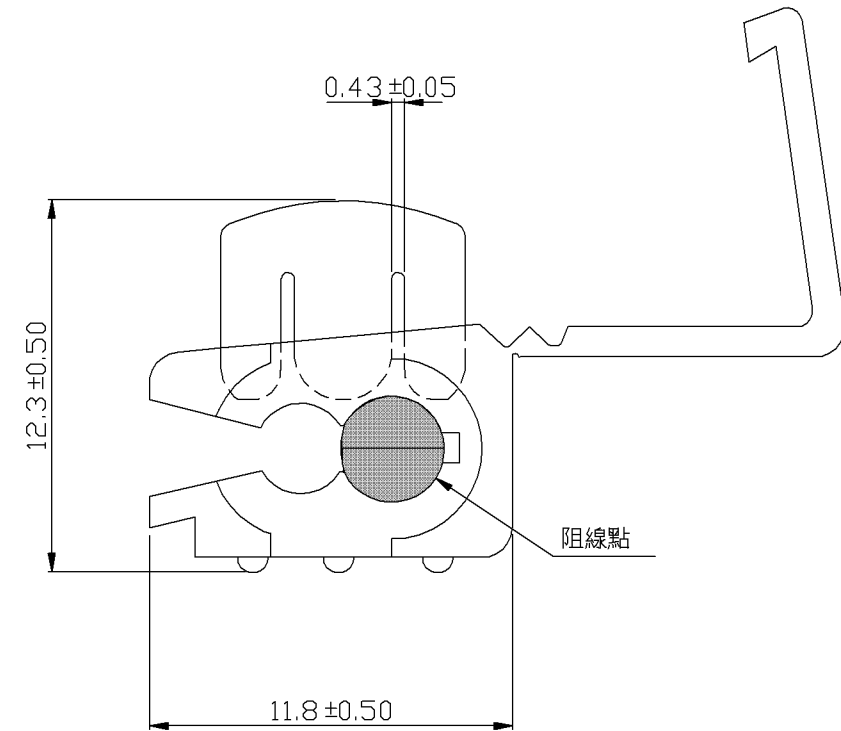


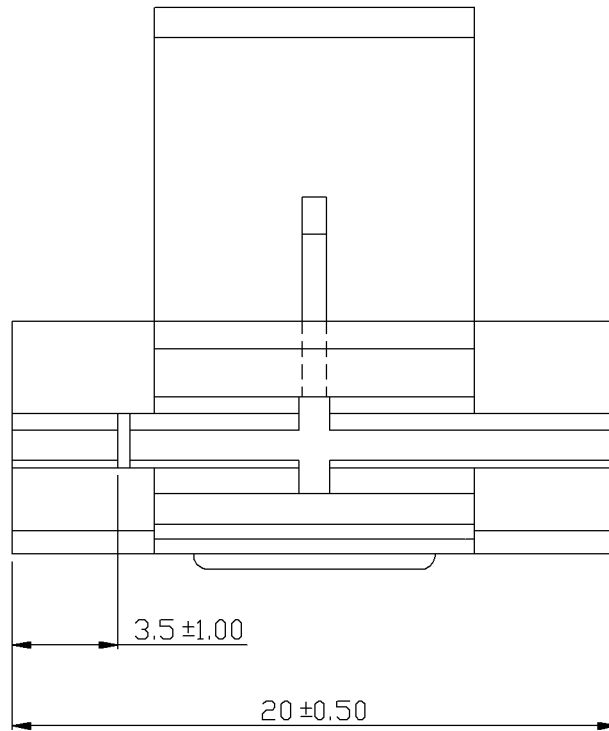

NOTE:

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18
AMP.	3	4	7
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : P.P.
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : BRASS
6. WIRE RANGE : 22-18 A.W.G. (0.5-0.75 mm²)
- △ 7. TERMINAL THICKENSS : 0.8 mm
- △ 8. SURFACE TREATMENT : TIN PLATED

Tolerance Unless Otherwise Specified			
0 > 6 mm	± 0.20	ANGLE	
6 > 18 mm	± 0.30	0° >	° REF ±
18 > 30 mm	± 0.40	° >	° ±
30 > 75 mm	± 0.50	° >	° ±

NAME	QUICK SPLICE CONNECTORS				UNIT	mm	
PART NO.	878100	MATERIAL	-----		APPROVE		
NUMBER	KA-95066-C	SCALE	SHEET	PAGE	CHECKED		
DATE	2006/02/20	4/1	1-1	10F1	DRAWN	張馨尹	

KST K.S. TERMINALS INC.