



# SUNON

## SPECIFICATION FOR APPROVAL

**CUSTOMER** :  
**DESCRIPTION** : AXIAL AC FAN  
**DIMENSIONS** : 172X151X51 mm  
**MODEL** : A2175-HBT  
T  
**APPROVED NO** :  
(AUTHORIZED)  
**APPROVED BY** :

|      |             |       |           |       |                              |             |            |
|------|-------------|-------|-----------|-------|------------------------------|-------------|------------|
| DAWN | Yuchen 7/31 | CHKD. | Kady 7/31 | APPR. | 89.8.2<br>發行章<br>26-<br>0887 | SPEC. NO.   | A170020    |
|      |             |       |           |       |                              | ISSUE DATE  | 07.31.2000 |
|      |             |       |           |       |                              | EDITION     | 0          |
|      |             |       |           |       |                              | REVISE DATE |            |
|      |             |       |           |       |                              | E.SPEC      | EA17008    |

建準電機工業股份有限公司

SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO., LTD.


12FL., 120 CHUNG CHENG 1ST RD.,

TEL:886-7-7163069(41 LINES)

KAOHSIUNG, TAIWAN, R. O. C.

FAX:886-7-7163086~89


# MODEL NUMBERING SYSTEM

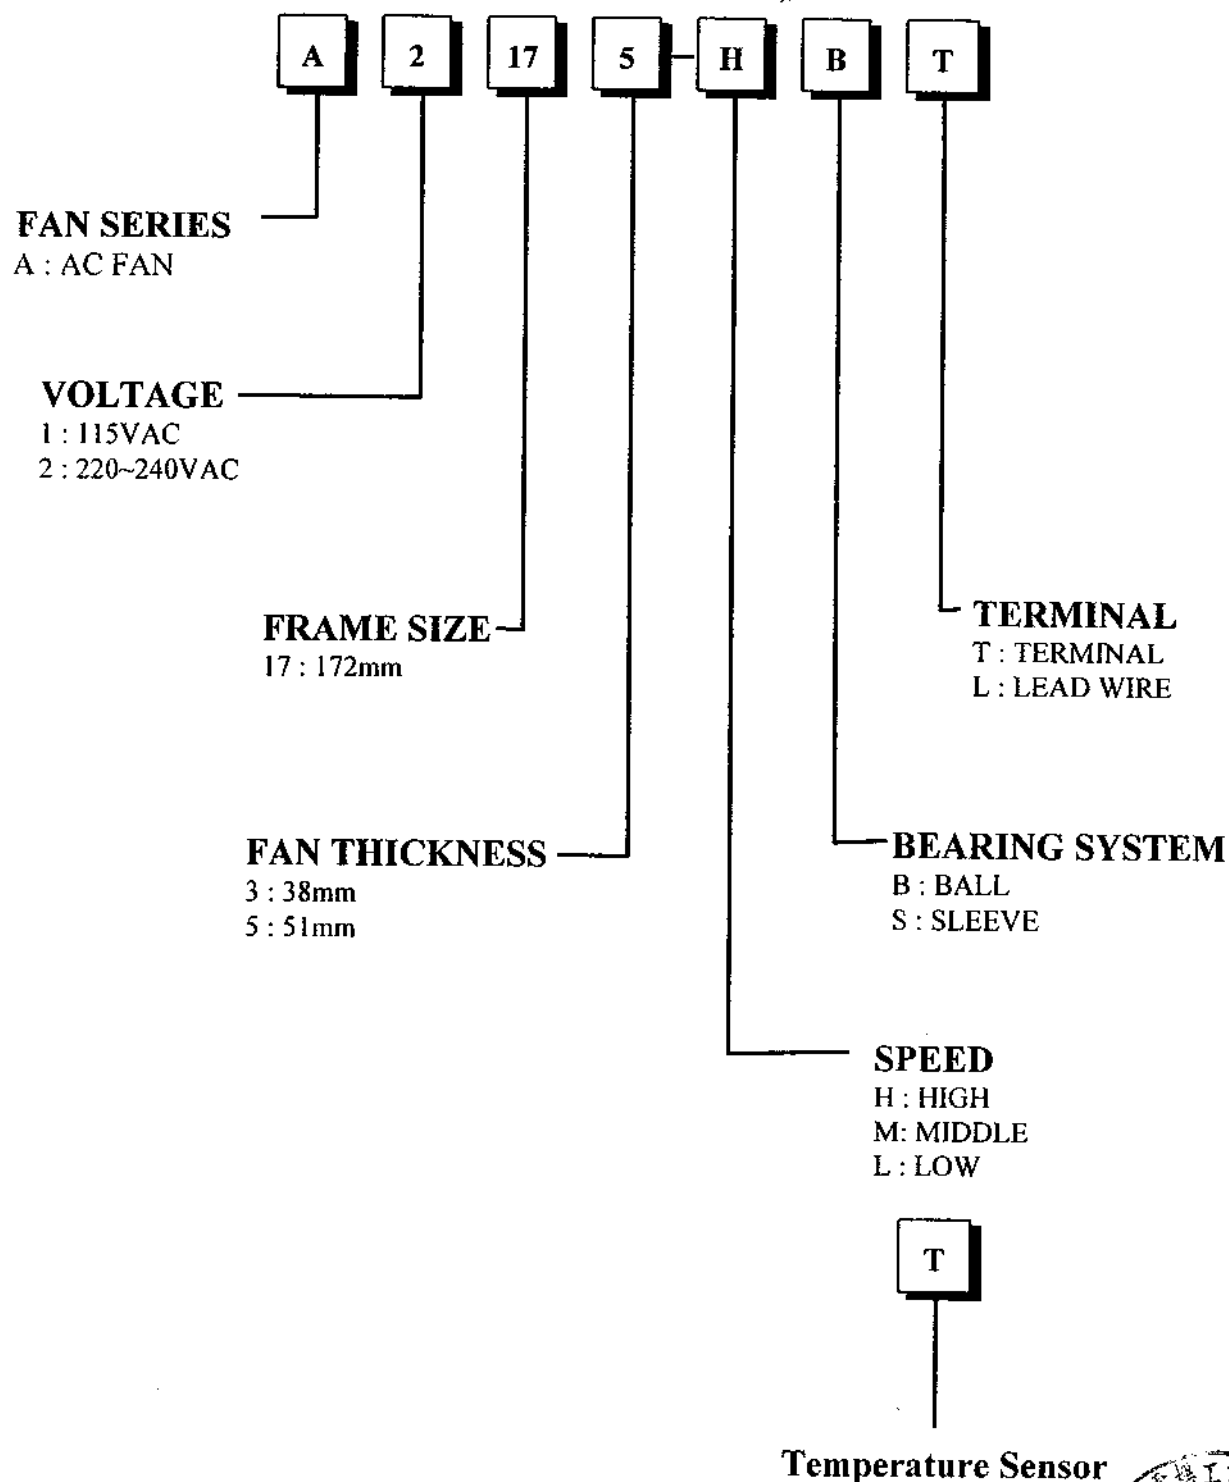

建準電機工業股份有限公司  
SUNONWEALTH ELECTRIC  
MACHINE INDUSTRY CO., LTD

|            |              |
|------------|--------------|
| SPEC. NO.  | A170020      |
| ISSUE DATE | 07. 31. 2000 |
| PAGE       | 1 OF 6       |

|             |           |
|-------------|-----------|
| REVISE DATE | 89. 8. -2 |
| EDITION     | 發行章       |



## AXIAL AC FAN

MODEL : A2175-HBT

T

**CHARACTERISTICS**

1. Motor Design : Reliable Shaded-Pole Motor Contraction.
2. Insulation Resistance : 500Megohms minimum at 500 VDC.
3. Dielectric Strength : 1500 VAC for one minute.
4. Motor Protection : Thermal protected & Impedance protected
5. Noise Level : Measured in an semi-an echoic chamber  
with background noise level below 15  
dB(A). The fan is running in free air with  
microphone at a distance of one meter  
from the fan intake.
6. Air Performance : Measured by a double chamber. The value  
are recorded when the fan speed is stabilized  
at rated voltage.
7. Tolerances :  $\pm 15\%$  on rated power and current.

建準電機工業股份有限公司  
SUNONWEALTH ELECTRIC  
MACHINE INDUSTRY CO., LTD

|            |            |             |         |
|------------|------------|-------------|---------|
| SPEC. NO.  | A170020    | REVISE DATE | 89.8.-2 |
| ISSUE DATE | 07.31.2000 | EDITION     | 1.0     |
| PAGE       | 2 OF 6     |             |         |




|                       |
|-----------------------|
| <b>SPECIFICATIONS</b> |
|-----------------------|

**MODEL : A2175-HBT**  
**T**

- |                              |                                                                                                                                                                 |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1-1. Rated Voltage           | : 220-240 VAC 50/60 Hz                                                                                                                                          |
| 1-2. Operating Voltage Range | : 150-245 VAC                                                                                                                                                   |
| 1-3. Starting Voltage        | : 150 VAC                                                                                                                                                       |
| 1-4. Rated Speed             | : 2600/2800 RPM $\pm$ 10%                                                                                                                                       |
| 1-5. Air Delivery            | : 178/192 CFM                                                                                                                                                   |
| 1-6. Static Pressure         | : 0.38/0.44 Inch-H <sub>2</sub> O                                                                                                                               |
| 1-7. Rated Current           | : 0.27/0.25 AMP                                                                                                                                                 |
| 1-8. Input Power             | : 43/40 WATTS                                                                                                                                                   |
| 1-9. Noise Level             | : 52/54 dB(A)                                                                                                                                                   |
| 1-10. Direction of Rotation  | : Counter-clockwise viewed front fan blade                                                                                                                      |
| 1-11. Motor Protection       | : Thermal protected & Impedance protected                                                                                                                       |
| 1-12. Operating Temperature  | : -10 to +80 Deg.C                                                                                                                                              |
| 1-13. Storage Temperature    | : -30 to +80 Deg.C                                                                                                                                              |
| 1-14. Bearing System         | : Precise ball bearing system                                                                                                                                   |
| 1-15. Weight                 | : 942g                                                                                                                                                          |
| 1-16. Vibration              | : Vibration of acceleration 1.5G and<br>Frequency 5~50~5Hz is applied in the<br>3 directions(X,Y,Z) for 30 minutes, each<br>Direction at the cycle of 1 minute. |
| 1-17. Life Expectancy        | : 50,000 Hrs at 25°C.                                                                                                                                           |

建準電機工業股份有限公司  
SUNONWEALTH ELECTRIC  
MACHINE INDUSTRY CO., LTD


|            |              |             |       |
|------------|--------------|-------------|-------|
| SPEC. NO.  | A170020      | REVISE DATE | 終部    |
| ISSUE DATE | 07. 31. 2000 | EDITION     | 0 - 2 |
| PAGE       | 3 OF 6       |             |       |



# MODEL : A2175-HBT T


## PERFORMANCE CURVES

STATIC  
PRESSURE

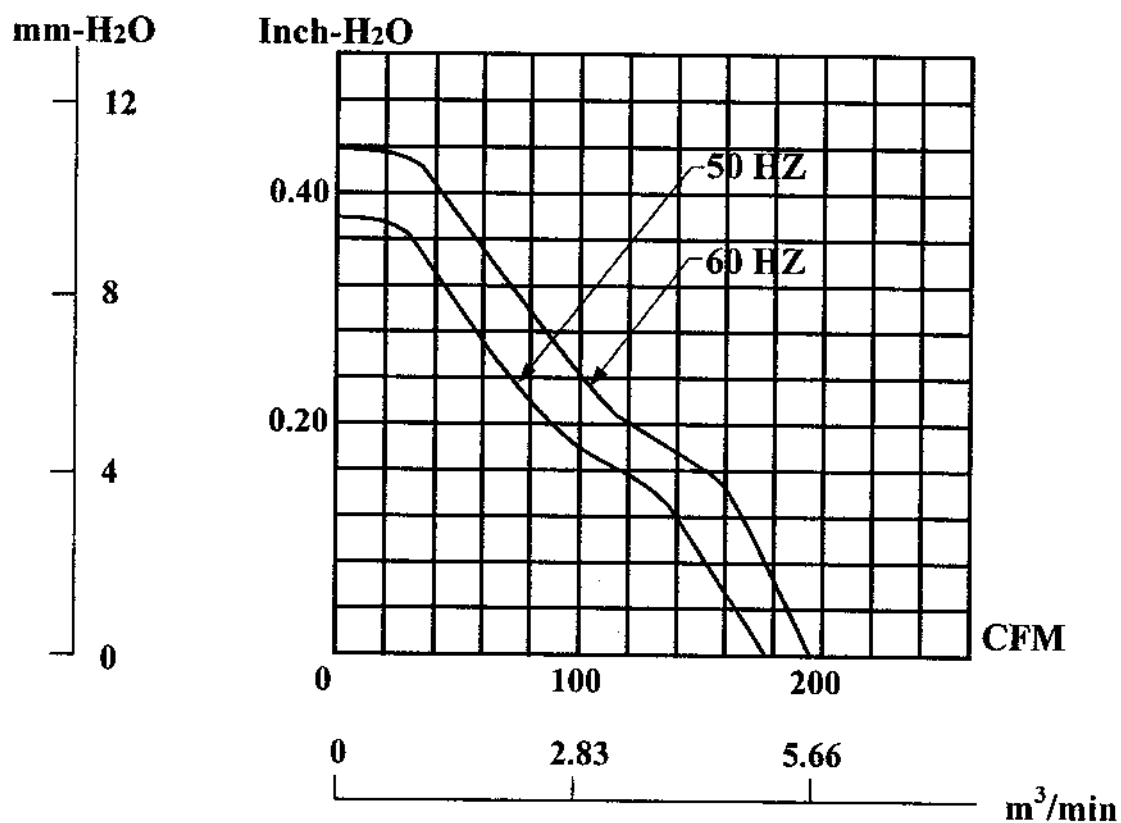

建準電機工業股份有限公司  
SUNONWEALTH ELECTRIC  
MACHINE INDUSTRY CO., LTD


|            |            |             |            |
|------------|------------|-------------|------------|
| SPEC. NO.  | A170020    | REVISE DATE | 07.31.2000 |
| ISSUE DATE | 07.31.2000 | EDITION     | 2          |
| PAGE       | 4 OF 6     |             |            |



**MATERIAL****2. Material**

2-1. Frame : DIE-CAST ALUMINUM

2-2. Impeller : Thermoplastic PBT of UL 94V-0

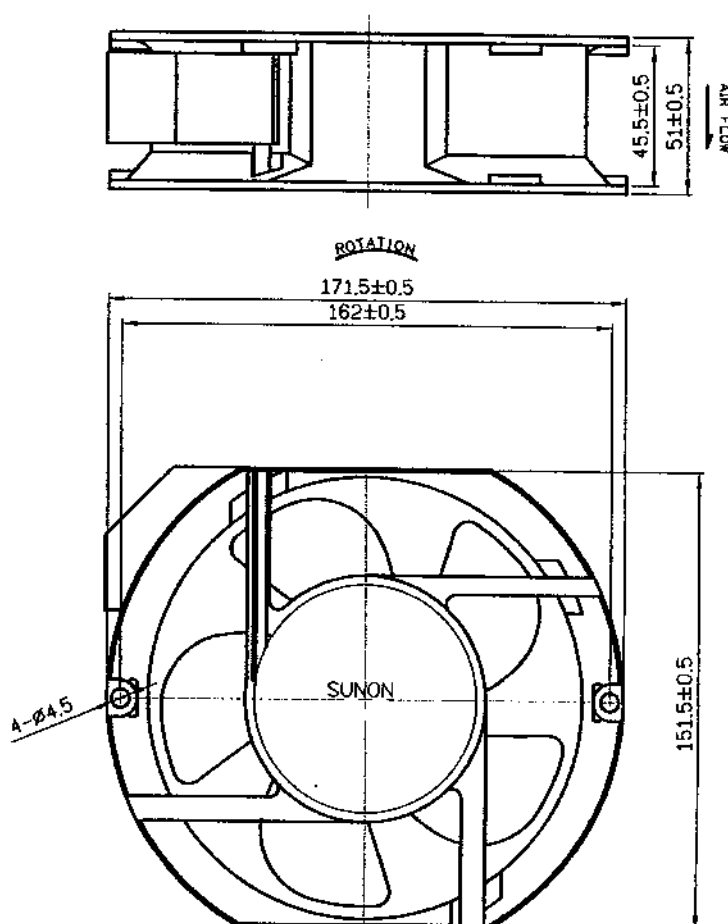**DIMENSIONS**

**Air Flow Direction: Label side.**

UNITS: mm

建準電機工業股份有限公司  
SUNONWEALTH ELECTRIC  
MACHINE INDUSTRY CO., LTD

SPEC. NO.

A170020

REVISE DATE

ISSUE DATE

07. 31. 2000

EDITION

0-2

PAGE

5 OF 6

發部

## Notes

1. SUNON will not guarantee the products if the application of our products is exceeded the limitation which is specified on this specification.
2. In case of change of the specification specified on this document, a written notice is requested in advance.
3. Please do not touch the impeller with pressure and never bring the fan with lead wire. The bearings and lead wire may be damaged.
4. No guarantee on the products against the safety problem or failure caused by powder dust, drop of water or insect.
5. If there is any data or related documentation different from this data sheet, this data sheet is the principal reference.
6. For the purpose of MIS, please indicate SPEC No. on every order.
7. In case of the fan has no polarity protection function, wires with same color (electrode) must be connected together during the assembly. (i.e. red + red, black + black) or the fan will be damaged immediately.
8. Please do not use the fan in the environment of corrosive gas or liquid or any detrimental gas.
9. Please do not store the fan in the environment of high / low temperature, high humidity or any detrimental gas. Please store the fan within 6 months, every 6 months, there shall be a linkage of electric current to the fan, even though the fan is stored in room temperature.
10. While the fan is in operation, please do not lock the fan intentionally for a long period of time, since the continuous stoppage will result in over-heat and damage of the fan.
11. During the installation of the fan, please pay substantial attention to possible noise cause by resonance vibration and vibration.
12. During the testing of the fan, please be sure to use finger guard to insure safety.
13. Unless otherwise specified, if there is any doubt in the judgement, the temperature and relative humidity range of environment will be take in according to the standard test condition as 25°C and 65%.

|                                                                   |            |              |             |
|-------------------------------------------------------------------|------------|--------------|-------------|
| 建準電機工業股份有限公司<br>SUNONWEALTH ELECTRIC<br>MACHINE INDUSTRY CO., LTD | SPEC. NO.  | A170020      | REVISE DATA |
|                                                                   | ISSUE DATE | 07. 31. 2000 | EDITION     |
|                                                                   | PAGE       | 6 OF 6       |             |





# SUNON

## SPECIFICATION FOR APPROVAL

**CUSTOMER** :

**DESCRIPTION** : AXIAL AC FAN

**DIMENSIONS** : 172X151X51 mm

**MODEL** : A2175-HBL  
T

**APPROVED NO** :  
(AUTHORIZED)

**APPROVED BY** :

|      |             |       |  |       |      |             |            |
|------|-------------|-------|--|-------|------|-------------|------------|
| DAWN | Yuchen 7/31 | CHKD. |  | APPD. | 76-T | SPEC. NO.   | A170019    |
|      |             |       |  |       |      | ISSUE DATE  | 07.31.2000 |
|      |             |       |  |       |      | EDITION     | 0          |
|      |             |       |  |       |      | REVISE DATE |            |
|      |             |       |  |       |      | E.SPEC      | EA17008    |

建準電機工業股份有限公司

SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO., LTD.


12FL., 120 CHUNG CHENG 1ST RD.,

TEL:886-7-7163069(41 LINES)

KAOHSIUNG, TAIWAN, R. O. C. 9

FAX:886-7-7163086~89

# MODEL NUMBERING SYSTEM

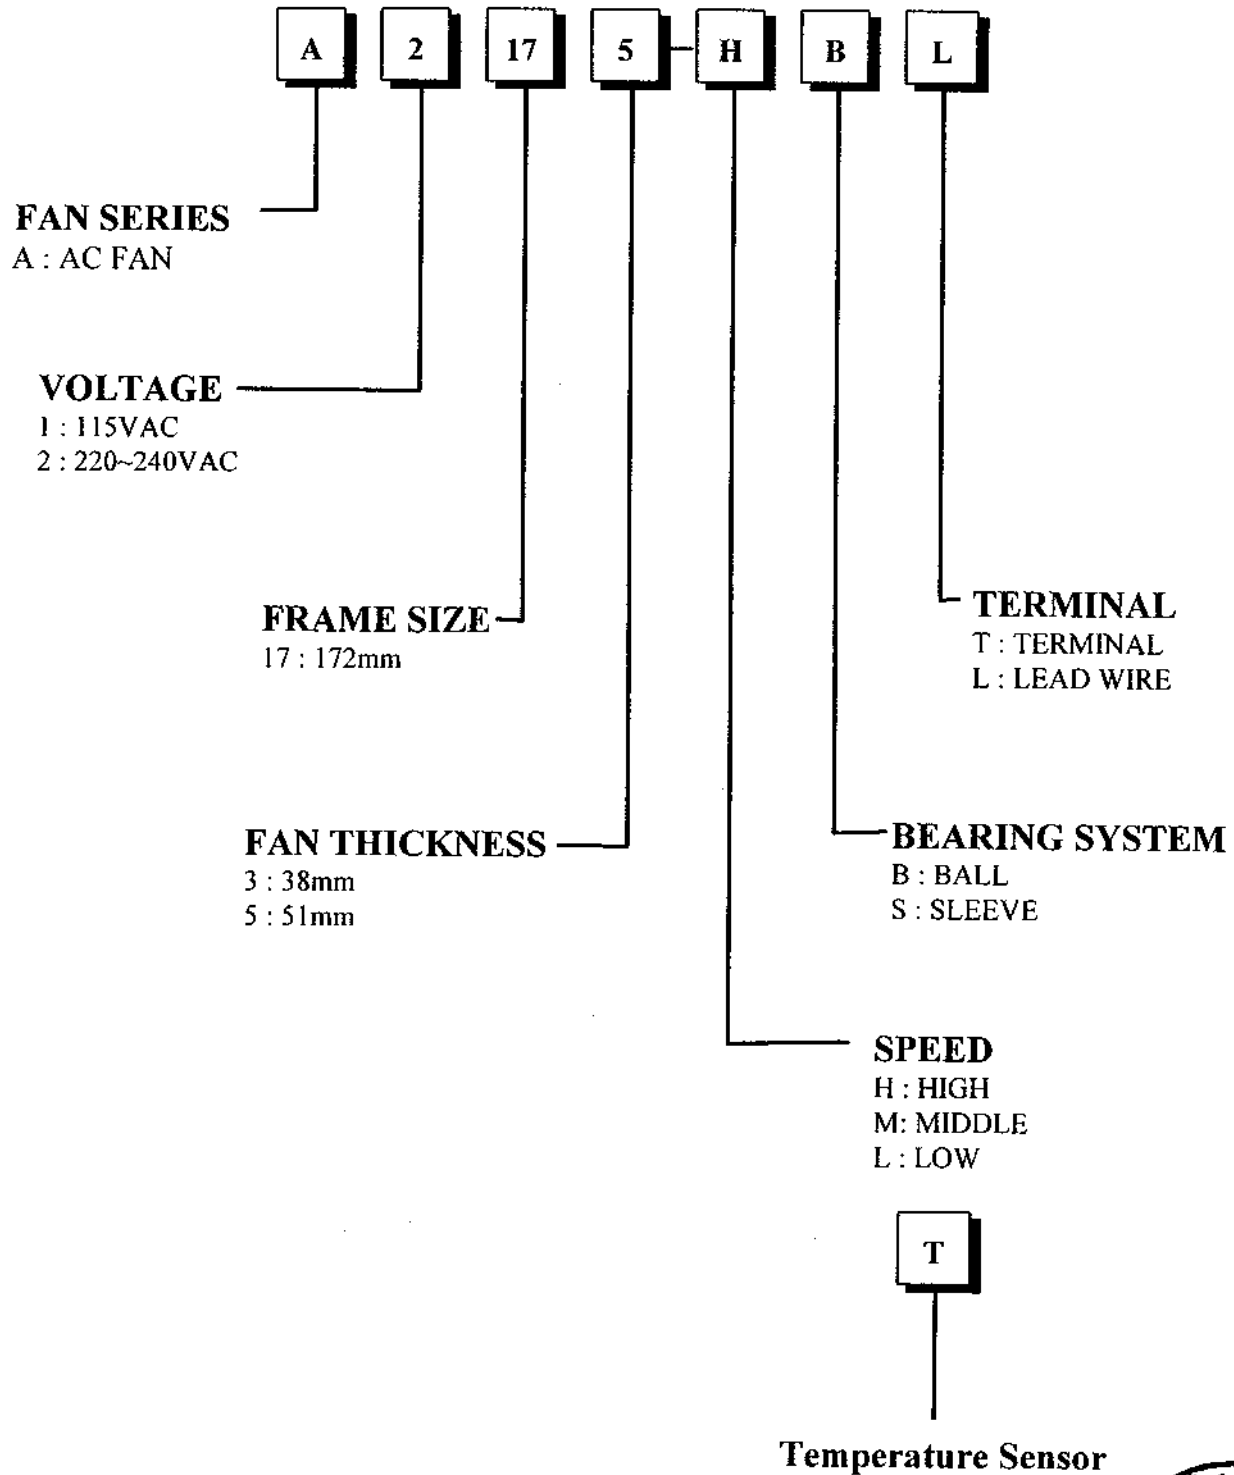

## AXIAL AC FAN

MODEL : A2175-HBL

T

**CHARACTERISTICS**

1. Motor Design : Reliable Shaded-Pole Motor Contraction.
2. Insulation Resistance : 500Megohms minimum at 500 VDC.
3. Dielectric Strength : 1500 VAC for one minute.
4. Motor Protection : Thermal protected & Impedance protected
5. Noise Level : Measured in an semi-an echoic chamber  
with background noise level below 15  
dB(A). The fan is running in free air with  
microphone at a distance of one meter  
from the fan intake.
6. Air Performance : Measured by a double chamber. The value  
are recorded when the fan speed is stabilized  
at rated voltage.
7. Tolerances :  $\pm 15\%$  on rated power and current



|                |
|----------------|
| SPECIFICATIONS |
|----------------|

**MODEL : A2175-HBL**  
**T**

- |                              |                                                                                                                                                                 |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1-1. Rated Voltage           | : 220-240 VAC 50/60 Hz                                                                                                                                          |
| 1-2. Operating Voltage Range | : 150-245 VAC                                                                                                                                                   |
| 1-3. Starting Voltage        | : 150 VAC                                                                                                                                                       |
| 1-4. Rated Speed             | : 2600/2800 RPM $\pm$ 10%                                                                                                                                       |
| 1-5. Air Delivery            | : 178/192 CFM                                                                                                                                                   |
| 1-6. Static Pressure         | : 0.38/0.44 Inch-H <sub>2</sub> O                                                                                                                               |
| 1-7. Rated Current           | : 0.27/0.25 AMP                                                                                                                                                 |
| 1-8. Input Power             | : 43/40 WATTS                                                                                                                                                   |
| 1-9. Noise Level             | : 52/54 dB(A)                                                                                                                                                   |
| 1-10. Direction of Rotation  | : Counter-clockwise viewed front fan blade                                                                                                                      |
| 1-11. Motor Protection       | : Thermal protected & Impedance protected                                                                                                                       |
| 1-12. Operating Temperature  | : -10 to +80 Deg.C                                                                                                                                              |
| 1-13. Storage Temperature    | : -30 to +80 Deg.C                                                                                                                                              |
| 1-14. Bearing System         | : Precise ball bearing system                                                                                                                                   |
| 1-15. Weight                 | : 942g                                                                                                                                                          |
| 1-16. Vibration              | : Vibration of acceleration 1.5G and<br>Frequency 5~50~5Hz is applied in the<br>3 directions(X,Y,Z) for 30 minutes, each<br>Direction at the cycle of 1 minute. |
| 1-17. Life Expectancy        | : 50,000 Hrs at 25°C.                                                                                                                                           |


建準電機工業股份有限公司  
SUNONWEALTH ELECTRIC  
MACHINE INDUSTRY CO., LTD.

|            |              |             |
|------------|--------------|-------------|
| SPEC. NO.  | A170019      | REVISE DATE |
| ISSUE DATE | 07. 31. 2000 | EDITION     |
| PAGE       | 3 OF 6       |             |



# MODEL : A2175-HBL T


## PERFORMANCE CURVES

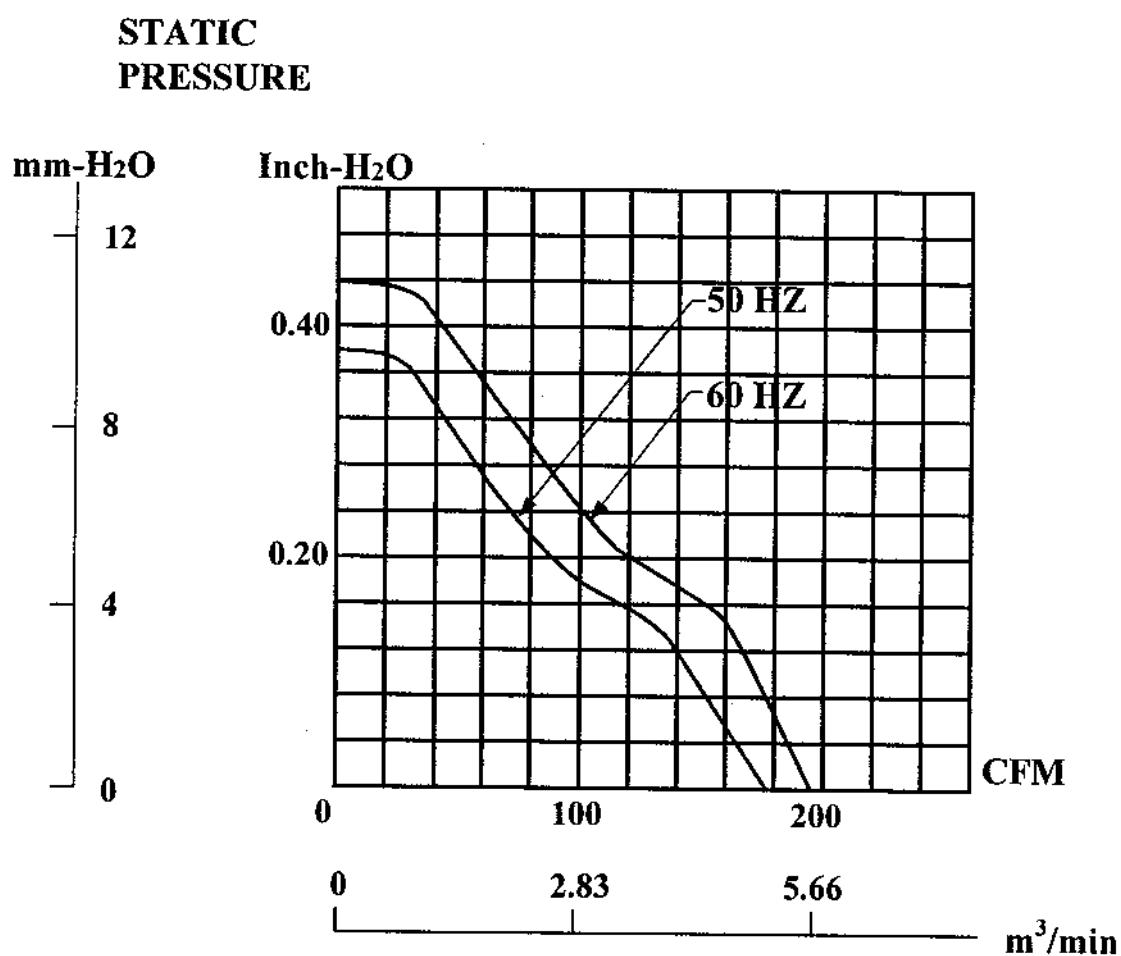

建準電機工業股份有限公司  
SUNONWEALTH ELECTRIC  
MACHINE INDUSTRY CO., LTD


|            |              |
|------------|--------------|
| SPEC. NO.  | A170019      |
| ISSUE DATE | 07. 31. 2000 |
| PAGE       | 4 OF 6       |

|             |              |
|-------------|--------------|
| REVISE DATE | 08. 08. 2000 |
| EDITION     | 2            |



**MATERIAL****2. Material**


- 2-1. Frame : DIE-CAST ALUMINUM
- 2-2. Impeller : Thermoplastic PBT of UL 94V-0
- 2-3. Lead Wire : UL1007,18AWG

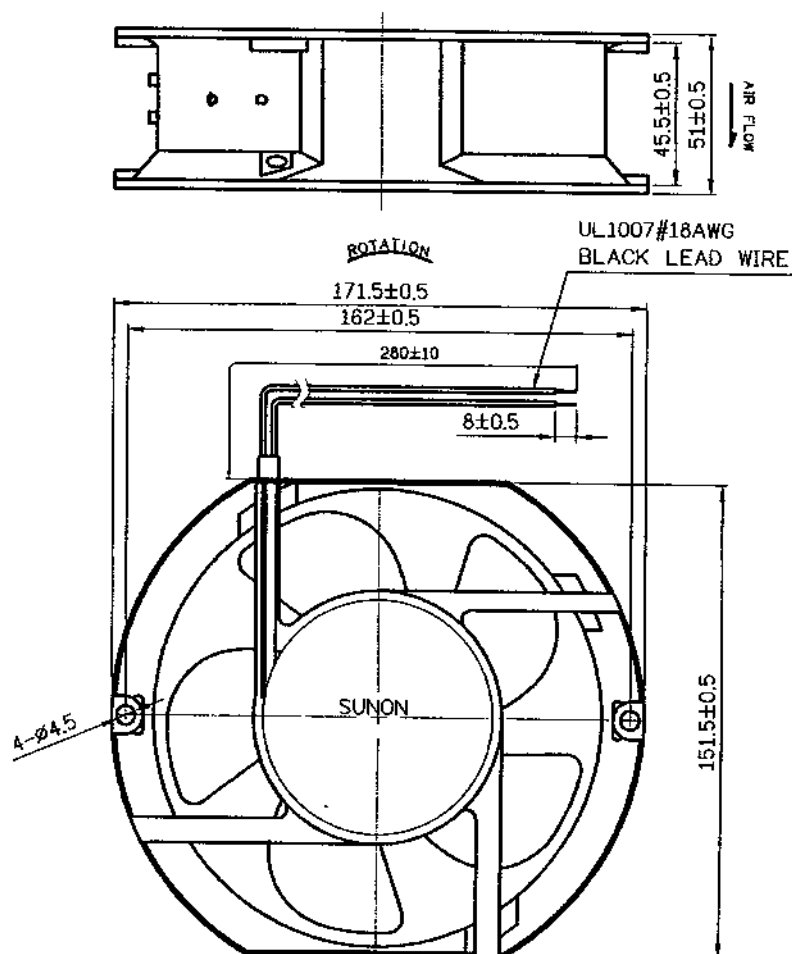**DIMENSIONS**

**Air Flow Direction: Label side.**

建準電機工業股份有限公司  
SUNONWEALTH ELECTRIC  
MACHINE INDUSTRY CO., LTD

|            |              |             |          |
|------------|--------------|-------------|----------|
| SPEC. NO.  | A170019      | REVISE DATE | 08.08.00 |
| ISSUE DATE | 07. 31. 2000 | EDITION     | 01       |
| PAGE       | 5 OF 6       |             |          |



## Notes

1. SUNON will not guarantee the products if the application of our products is exceeded the limitation which is specified on this specification.
2. In case of change of the specification specified on this document, a written notice is requested in advance.
3. Please do not touch the impeller with pressure and never bring the fan with lead wire. The bearings and lead wire may be damaged.
4. No guarantee on the products against the safety problem or failure caused by powder dust, drop of water or insect.
5. If there is any data or related documentation different from this data sheet, this data sheet is the principal reference.
6. For the purpose of MIS, please indicate SPEC No. on every order.
7. In case of the fan has no polarity protection function, wires with same color (electrode) must be connected together during the assembly. (i.e. red + red, black + black) or the fan will be damaged immediately.
8. Please do not use the fan in the environment of corrosive gas or liquid or any detrimental gas.
9. Please do not store the fan in the environment of high / low temperature, high humidity or any detrimental gas. Please store the fan within 6 months, every 6 months, there shall be a linkage of electric current to the fan, even though the fan is stored in room temperature.
10. While the fan is in operation, please do not lock the fan intentionally for a long period of time, since the continuous stoppage will result in over-heat and damage of the fan.
11. During the installation of the fan, please pay substantial attention to possible noise cause by resonance vibration and vibration.
12. During the testing of the fan, please be sure to use finger guard to insure safety.
13. Unless otherwise specified, if there is any doubt in the judgement, the temperature and relative humidity range of environment will be take in according to the standard test condition as 25°C and 65%.

|                                                                   |            |              |             |      |
|-------------------------------------------------------------------|------------|--------------|-------------|------|
| 建準電機工業股份有限公司<br>SUNONWEALTH ELECTRIC<br>MACHINE INDUSTRY CO., LTD | SPEC. NO.  | A170019      | REVISE DATE |      |
|                                                                   | ISSUE DATE | 07. 31. 2000 | EDITION     | 00-2 |
|                                                                   | PAGE       | 6 OF 6       |             |      |

