


Sign



How to Order


AR	2000	-	02
Series No.	Body Size		Port Size
	2000		02:1/4 "
	3000		03:3/8 "
	4000		04:1/2 "
	5000		06:3/4 "
			10:1 "

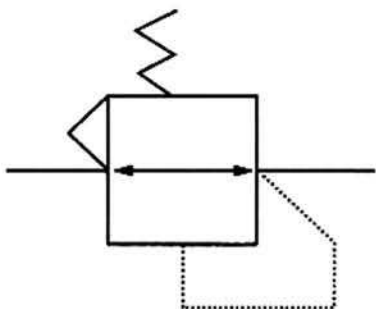

Technological Data

Item Number	AR2000-02	AR3000-02	AR3000-03	AR4000-03	AR4000-04	AR4000-06	AR5000-06	AR5000-10
Minimum Operating Procedures	1/4 "	1/4 "	3/8 "	3/8 "	1/2 "	3/4 "	3/4 "	1 "
Port Size (PT)	550	2500	2500	6000	6000	6000	8000	8000
Cup Capacity	Air							
Nominal Flow Rate (L/Min)	1.5Mpa(15.3kgf/cm ²)							
Working Medium	1.0Mpa(10.2kgf/cm ²)							
Proof ressure	5~60℃							
Maximum Operating Pressure	0.05~0.85Mpa							
Ambient and Fluid Temperature	B220	B320	B320	B420	B420	B420	B640	B640
Pressure Range	0.27	0.41	0.41	0.85	0.84	0.94	1.19	1.19
Weight (kg)	Aluminum							

Outline Dimension Drawing

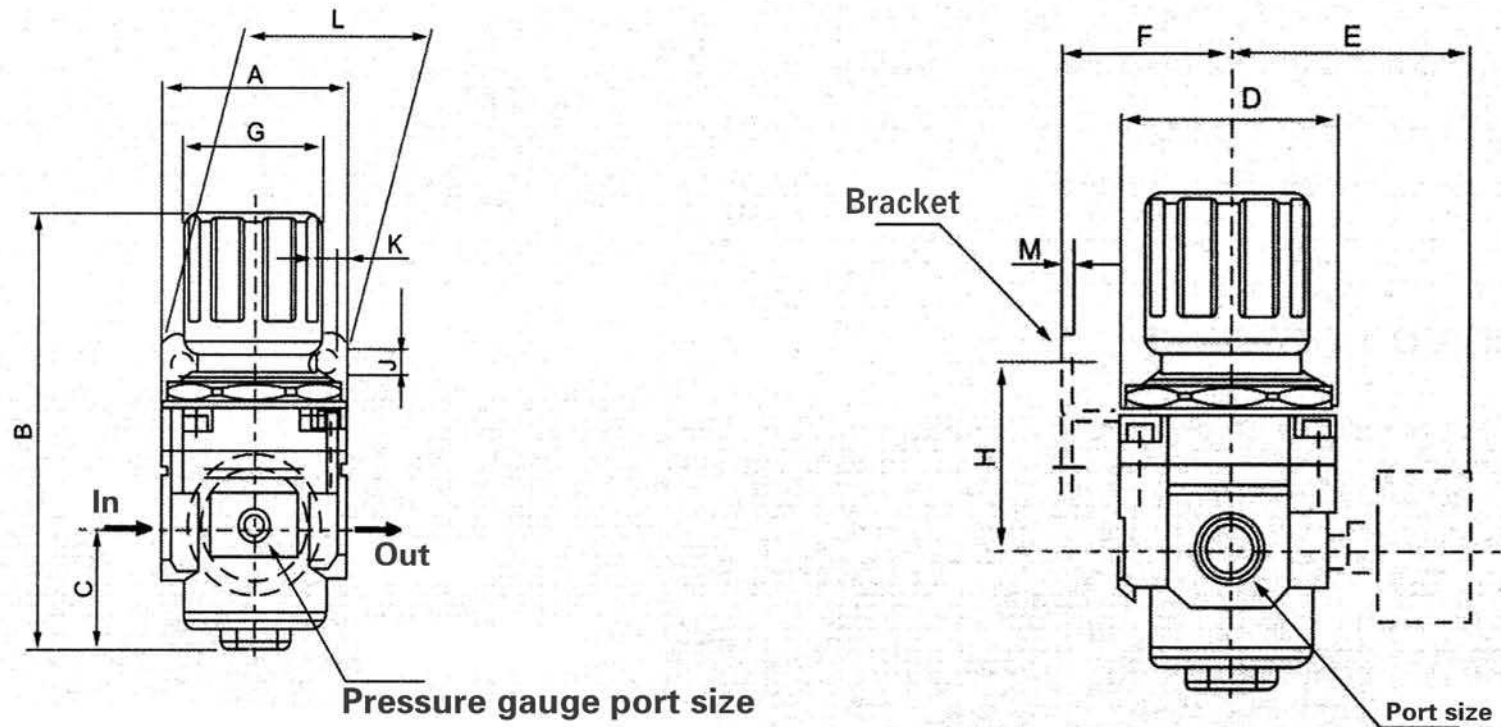

Item Number	Port Size	A	B	C	D	E	F	G	H	J	K	L	M	P
AR2000	1/4 "	40	95	17	40	56.8	30	34	45	5.4	15.4	55	2.3	33.5
AR2500	1/4 "	53	102.5	25	48	60.8	30	34	44	5.4	15.4	55	2.3	33.5
AR3000	1/4 ", 3/8 "	53	127.5	35	53	60.8	41	40	46	6.5	8	53	2.3	42.5
AR4000	3/8 ", 1/2 "	70	149.5	37.5	70	65.5	50	54	54	8.5	10.5	70	2.3	52.5
AR4000-06	3/4 "	75	154.5	40.5	70	69.5	50	66	56	8.5	10.5	70	2.3	52.5
AR5000	3/4 ", 1	95	168	48	90	75.5	70	65.8	65.8	11	13	90	3.2	52.5