

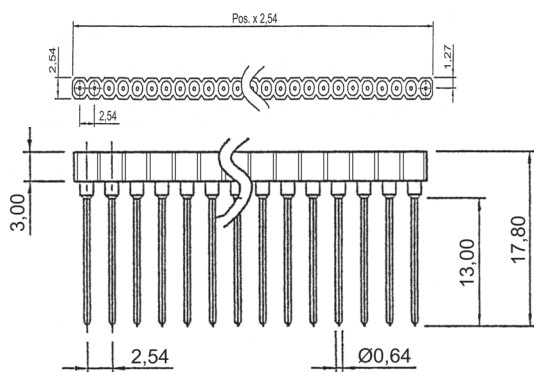


**Kontaktleiste**, 1-reihig, Raster 2,54mm, gedrehte Kontakte  
**Contact strip**, single row, pitch 2,54mm, machined pins

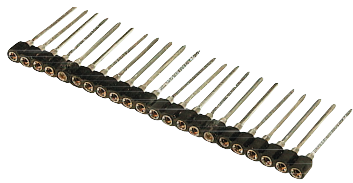

**Pin**  
Messing, gedreht

**Clip**  
Gold flash

**Isolierkörper**  
Polyamid, UL94V-0

**Nennstrom**  
3A

**Kontaktwiderstand**  
<4mΩ / Kontakt

**Isolationswiderstand**  
>1000MΩ bei 100V

**Betriebstemperatur**  
-55°C bis +125°C

**Pin**  
Brass, machined

**Clip**  
gold flash

**Insulator**  
Polyamide, UL94V-0

**Current rating**  
3A

**Contact resistance**  
<4mΩ / contact

**Insulations resistance**  
>1000MΩ at 100V

**Operating temperature**  
-55°C to +125°C

Bestellcode: **AW - 128 - X / X - T**  
 Ordercode :

1.

**Polzahl**  
20, 32

1.



2.

**No. of contacts**  
20,32

2.

**Oberfläche Pin**  
G -Gold flash  
Z -Verzinkt (Standard)

**Finish Pin**  
G -Gold flash  
Z -Tin (Standard)

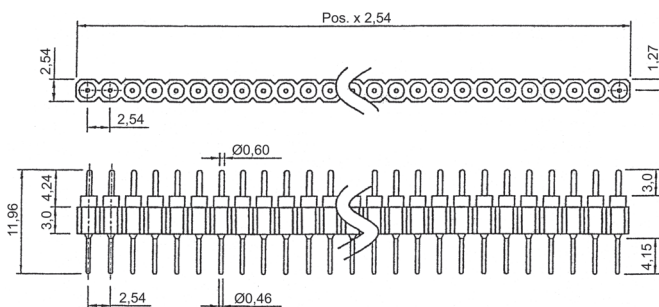

**Pin**  
Messing, gedreht

**Vergütung**  
Gold flash

**Isolierkörper**  
Polyamid, UL94V-0

**Nennstrom**  
3A

**Betriebstemperatur**  
-55°C bis +125°C

**Pin**  
Brass, machined

**Plating**  
gold flash

**Insulator**  
Polyamide, UL94V-0

**Current rating**  
3A

**Operating temperature**  
-55°C to +125°C

Bestellcode: **AW - 122 - 20 / G-T**  
 Ordercode :

**Standard:** 20-polig  
andere Polzahlen und Vergütungen  
auf Anfrage

**Standard:** 20-poles  
other no of contacts and platings  
on request

D-Sub / Hoods  
Centronics

Multiflex

Modular

USB

Switches

Powercords  
Powersockets

MiniDIN

DIN4161x  
HardmetricSockets + Strips  
Jumper