REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		

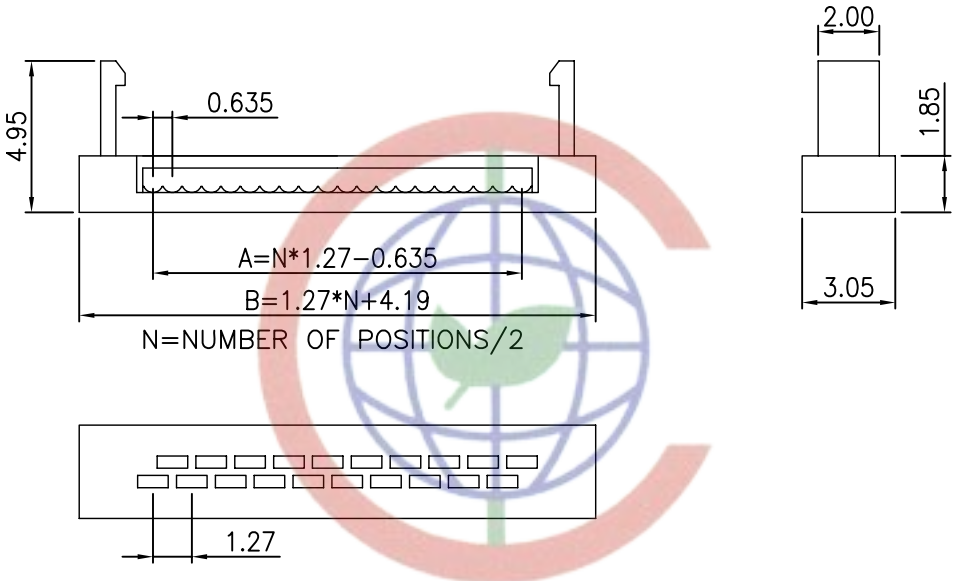

COVER

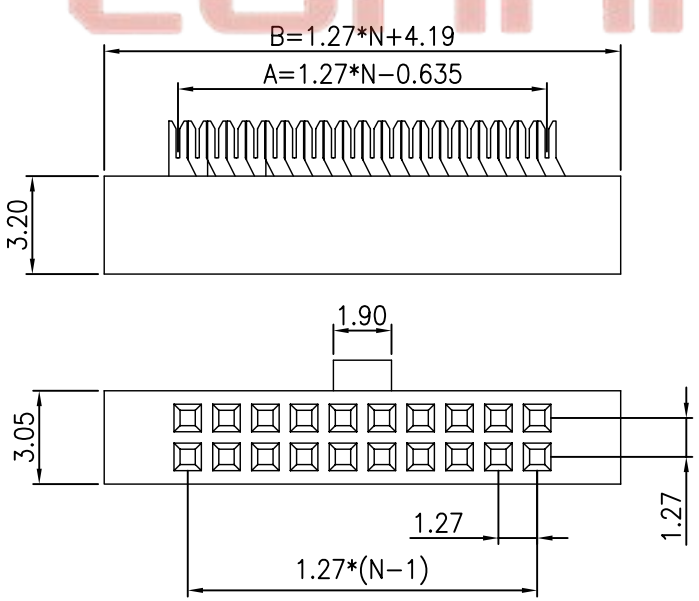

HOUSING

NOTES:

1. MATERIAL
   1.1 INSULATOR:THERMOPLASTIC(UL 94V−0).
   1.2 CONTACT: COPPER ALLOY.
2. SPECIFICATION
   2.1 TEMPERATURE RANGE:−40°C~+105°C.
   2.2 CONTACT RESISTANCE:20mΩ max.
   2.3 INSULATION RESISTANCE:1000MΩ min.
   2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
3. PACKING: PVC TRAY.
4. PRODUCT NUMBER CODE:

DS1017−01− X X X X

- CONTACT PLATING
  8: FULL GOLD FLASH
  2: NICKEL + GOLD FLASH
  6: FULL Tin
- POLARIZATION
  A: W/
  B: W/O
- STRAIN RELIEF
  N: W/O
- No. OF CONTACTS
  10 12 14 16 20 26 30 34
  40 44 50 60 68 80 100
- SERIES No.
  DS1017

CONNFLY
Tel:86−574−63508725
Fax:86−574−63510815
E−mail:sale@zhenqin.com.cn
Http://www.connfly.com
Add:East Industry Zone,Qiyan Town,Yuyao Ningbo China
P.C:315335

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1017−01−XXXX		

PROJECTION		TITLE	IDC SOCKET PITCH 1.27mm WITH 0.635mm FLAT CABLE
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1017−01 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD