

PIEZO BUZZER

Customer	
Customer P/O	
BeStar Model Name	BPT-380XAP230VAC
Product No.	041005
Issue No.	BS/TEP01.168A
Issue Date	03/05/09

Approval:

- 1.Characteristic
- 2.Dimension
- 3.Reliability Test
- 4.Packing



BESTAR ELECTRONICS INDUSTRY CO., LTD
TianAn Industry Park 4/F, Site B ChangZhou New District
Tel: 86-519-5103228
Fax: 86-519-5131010
Http: www.be-star.com
E-Mail: bestarco@pub.cz.jsinfo.net

BPT-380XAP230VAC(BPT-380XA230)


1. Characteristic

Electrical and Mechanical Characteristics



No.	Item	Specifications
1.	Operating Voltage (VAC)	130-240
2.	Rated Voltage (VAC)	230
3.	a) Supply Current (mA)	20
4.	a) Sound Pressure Level at 30 cm(dB)	90
5.	a) Resonant Frequency(Hz)	2900 ± 500
6.	@Tone Nature	FAST PULSE
7.	Operating Temperature(° C)	-20...+60
8.	Storage Temperature(° C)	-30...+70
	@rated pulse 3 ± 20%Hz at 230V	
	a) Value applying at rated voltage	

★Standard Output Measurement Setup

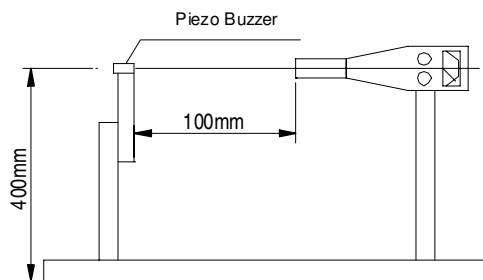

DIS.	王善梅	DATE		Page:1 of 3	BPT-380XAP230VAC
CHEC.		DATE		3rd angle projection	Piezo Buzzer
APPR.		DATE			DRG NO BS/TEP01.168A



BESTAR ELECTRONICS INDUSTRY CO.,LTD


TianAn Industry Park 4/F,Site B ChangZhou New District

E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com

This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd.
and shall not be used in whole or in part without its written content

BPT-380XAP230VAC(BPT-380XA230)

2. Dimension

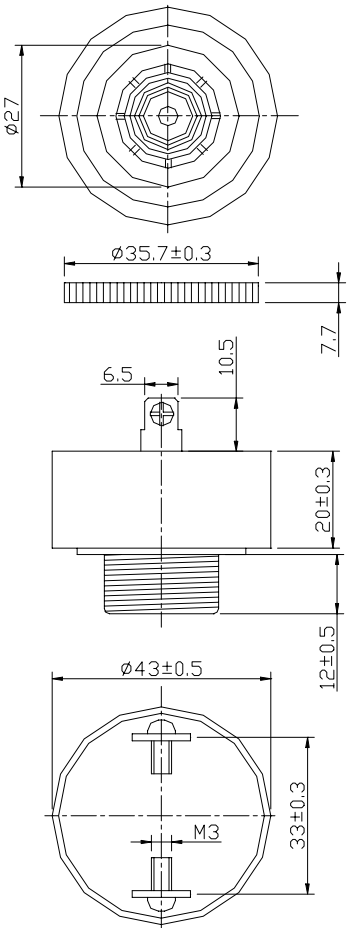

DIS.	王善梅	DATE		Page:2 of 3	BPT-380XAP230VAC
CHEC.		DATE		3rd angle projection	
APPR.		DATE			Piezo Buzzer
 BESTAR ELECTRONICSINDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TEP01.168A

BPT-380XAP230VAC(BPT-380XA230)

3. Reliability test

3.1 high temperature test

Temperature +70° C
Duration 96hrs

3.2 low temperature test


Temperature -30° C
Duration 96hrs

3.3 life test in normal temperature

Power supply 230V
Duration 500hrs


3.4 temperature cycle test

Cycles 5



3.5 Humidity cycle test

Cycles 5



all these tests above should be measured after leaving normal temperature for 2hrs.

3.6 Drop test

Height 70cm
(to 10mm thickness woodenboard)
Direction 3

Notice: All specification must be satisfied in this condition.

4.Packing

4.1 Packing Quantity :1pcs per small box
250pcs per carton
carton size 49x25x30cm,

DIS.	王善梅	DATE		Page:3 of 3	BPT-380XAP230VAC
CHEC.		DATE		3rd angle projection	
APPR.		DATE			Piezo Buzzer
 BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TEP01.168A