


C 091 D

Female receptacle for front mounting

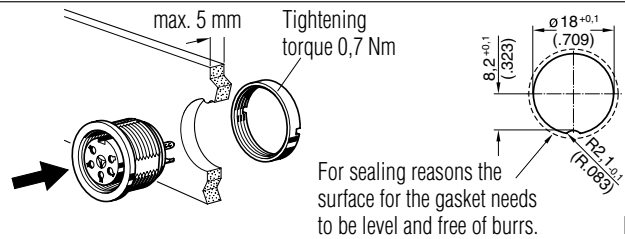

Panel cutout

Description	Drawing	No. of cont.	Part Number solder termination		Part Number Crimp termination ¹⁾
			Contact plating silver	Contact plating gold ²⁾	
Female receptacle, termination: solder or crimp, contact plating: silver or gold, panel mounting with ring nut, sealing with O-Ring.		3 ³⁾	C091 31N003 100 2	—	C091 11N003 000 2
		4	C091 31N004 100 2	—	C091 11N004 000 2
		5	C091 31N005 100 2	C091 31N005 200 2	C091 11N005 000 2
		5S ³⁾	C091 31N105 100 2	—	C091 11N105 000 2
		6 ³⁾	C091 31N006 100 2	—	C091 11N006 000 2
		7	C091 31N007 100 2	—	C091 11N007 000 2
		7 ³⁾	C091 31N107 100 2	—	C091 11N107 000 2
		8 ³⁾	C091 31N008 100 2	C091 31N008 200 2	C091 11N008 000 2
		12	C091 31N012 100 2	C091 31N012 200 2	—
		14	C091 31N014 100 2	C091 31N014 200 2	—
		3 ³⁾	C091 61N003 110 2	—	—
		4 ³⁾	C091 61N004 110 2	—	—
Female receptacle, termination: straight dip solder, contact plating: silver or gold, pin length 15 mm from flange, panel mounting with ring nut, sealing with O-Ring, solder area: tin plated.		5	C091 61N005 110 2	—	—
		5S ³⁾	C091 61N105 110 2	—	—
		6	C091 61N006 110 2	—	—
		7	C091 61N007 110 2	—	—
		7 ³⁾	C091 61N107 110 2	—	—
		8 ³⁾	C091 61N008 110 2	—	—
		12	—	C091 61N012 210 2	—
		14	—	C091 61N014 210 2	—
		3 ³⁾	C091 61N003 120 2	—	—
		4 ³⁾	C091 61N004 120 2	—	—
		5	C091 61N005 120 2	—	—
		5S ³⁾	C091 61N105 120 2	—	—
Female receptacle, termination: straight dip solder, contact plating: silver, pin length 19 mm from flange, panel mounting with ring nut, sealing with O-Ring, solder area: tin plated.		6 ³⁾	C091 61N006 120 2	—	—
		7	C091 61N007 120 2	—	—
		7 ³⁾	C091 61N107 120 2	—	—
		8 ³⁾	C091 61N008 120 2	—	—
		12	—	—	—
		14	—	—	—
		3 ³⁾	C091 61N003 130 2	—	—
		4 ³⁾	C091 61N004 130 2	—	—
		5	C091 61N005 130 2	—	—
		5S ³⁾	C091 61N105 130 2	—	—
		6 ³⁾	C091 61N006 130 2	—	—
		7	C091 61N007 130 2	—	—
Female receptacle, termination: straight dip solder, contact plating: silver, pin length 24 mm from flange, panel mounting with ring nut, sealing with O-Ring, solder area: tin plated.		7 ³⁾	C091 61N107 130 2	—	—
		8 ³⁾	C091 61N008 130 2	—	—
		12	—	—	—
		14	—	—	—

¹⁾ Please order crimp contacts separately, see page 43

²⁾ see remark page 34

³⁾ Contact order for DIN EN 60 130-9

⁴⁾ Available upon request.