

WH Series


- Standard series for general purpose
- Wide temperature range from -40°C ~ +105°C
- Endurance: +105°C 2,000 hours
- RoHS Compliant



SPECIFICATIONS


Items	Characteristics													
Category														
Temperature Range	-40 to +105℃ (6.3 to 100V _{dc})						-25 to +105℃ (160 to 450V _{dc})							
Rated Voltage Range	6.3 to 450V _{dc}													
Capacitance Tolerance	±20%(M)													
Leakage Current	6.3 to 100V _{dc}					160 to 450V _{dc}					Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20℃)			
	I ≤ 0.03CV or 4μA (at 1minute) I ≤ 0.01CV or 3μA (at 2minute) Whichever is greater					CV		After 1 minutes		After 5 minutes				
						CV≤1,000		I ≤ 0.1CV+40μA		I ≤ 0.03CV+15μA				
						CV> 1,000		I ≤ 0.04CV+100μA		I ≤ 0.02CV+25μA				
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3	10	16	25	35	50	63	100	160~250	350~400	450		
	tanδ (Max.)	0.26	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.20	0.24	0.24		
	When nominal capacitance exceeds 1,000 μF, add 0.02 to the value above for each 1,000 μF increase. (at 20℃, 120Hz)													
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3	10	16	25	35	50	63	100	160~250	350~400	450		
	Z(-25℃)/Z(+20℃)	5	4	3	2					3	6	6	(at 120Hz)	
	Z(-40℃)/Z(+20℃)	12	10	8	5	4	3			-	-	-		
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105℃.													
	Capacitance change	≤ ±20% of the initial value												
	D.F. (tanδ)	≤200% of the initial specified value												
	Leakage current	≤The initial specified value												
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied.													
	Capacitance change	≤ ±20% of the initial value												
	D.F. (tanδ)	≤200% of the initial specified value												
	Leakage current	≤ 200% of the initial specified value												

DIMENSIONS [mm]

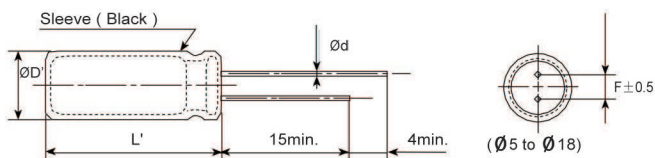

ØD	5	6.3	8	10	12.5	16	18
Ød	0.5	0.5	0.5	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ØD'	ØD+0.5max.						
L'	L+2max.						

PART NUMBER SYSTEM

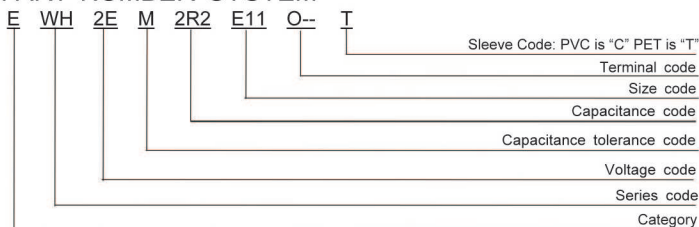

※ Sleeve Code and Terminal Code should follow the part number system

RATED RIPPLE CURRENT MULTIPLIERS

Frequency correction factor for ripple current

Cap.(μF) \ Freq.(Hz)	50	120	300	1k	10k	100k
Cap. < 10	0.65	1.00	1.35	1.75	2.30	2.50
10 ≤ Cap. < 100	0.75	1.00	1.25	1.50	1.75	1.80
100 ≤ Cap. ≤ 1000	0.80	1.00	1.15	1.30	1.40	1.50
Cap. > 1000	0.85	1.00	1.03	1.05	1.08	1.08

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.