


NOTES:

1. RATINGS: 20 AMPS @ 30 VAC
10 AMPS @ 115 VAC
5 AMPS @ 220 VAC
2. DIFFERENTIAL ANGLE: 3 DEG. MAX.
3. ACTION: SPST
- 4 UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

MERCURY TO DRY METAL CONTACTS.

REV.	DATE	REVISION RECORD	DR.
A	01/99	ORIGINAL	S.H.

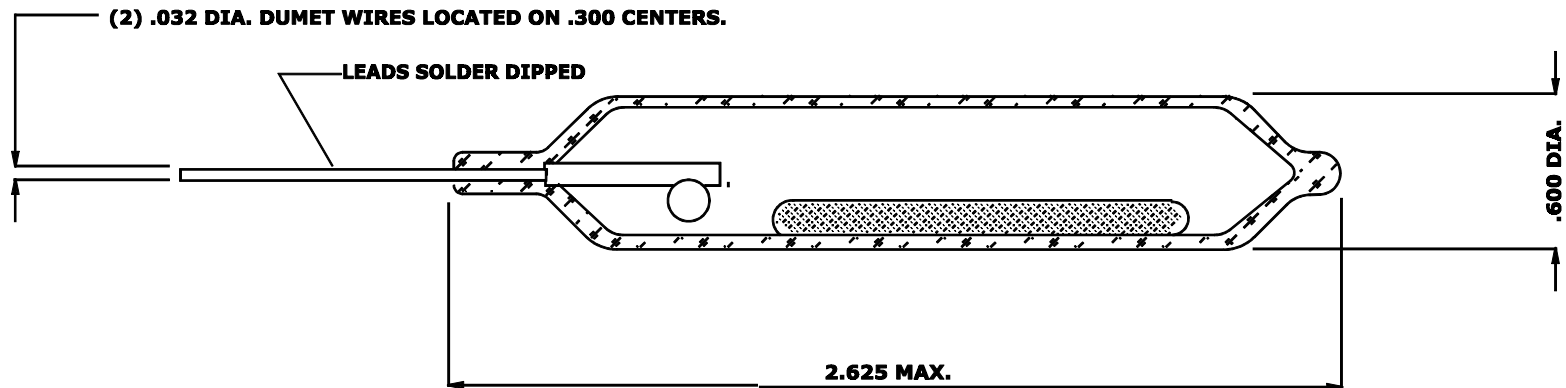

COMUS INTERNATIONAL

454 ALLWOOD RD. CLIFTON, NJ 07012 U.S.A. PH (973) 777-6900

TOLERANCES (except as noted)		REF.:	SCALE: NONE	DRAWN BY: S.H.	APPROVED:
DECIMAL ± .01 (.254) 2 Digt ± .005 (.127) 3 Digt	FRACTIONAL ± 1/64 (.397) ANGULAR ± 1/2 °	TITLE: MERCURY SWITCH			
		DATE: 01/07/99	DRAWING NUMBER: CL62-SO		