
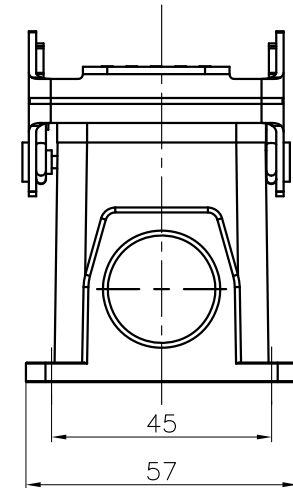
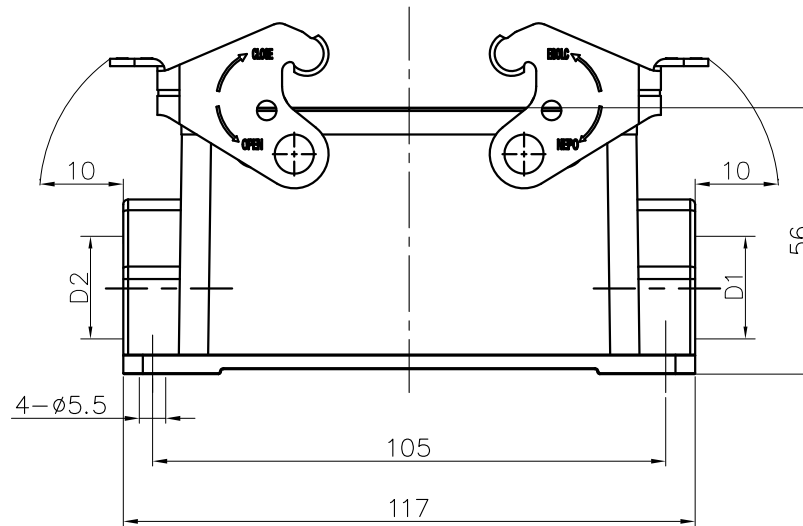



TYPE	Thread		Selection
	D1	D2	
D16B-SF-2L-M25	M25	—	
D16B-SF-2L-2M25	M25	M25	
D16B-SF-2L-PG21	PG21	—	
D16B-SF-2L-2PG21	PG21	PG21	

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

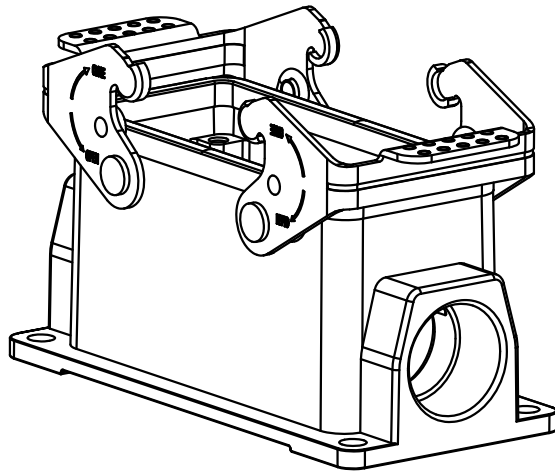

Housings Feature

- 01.Material: aluminium die-cast
- 02.Surface:Powder-coated
- 03.Color:grey(RAL 7037)
- 04.Material:Metal(Lever)
- 05.Sealing:NBR
- 06.Limiting temperatures:-40°C ~ +125°C
- 07.Flammability acc to UL94:V0
- 08.Degree of protection acc.to
EN60529 for coupled connector :IP65
- 09.Rohs compliance

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:		NAME:			
	CHKD:		D16B-SF-2L-M/PG			
	DRFT: Mr.yang 2017/06/28		TITLE: CUSTOMER DRAWING		REV	D0—1
	 THIRD ANGLE PROJECTION		DRAWING NO.:		SHEET	1/1
			MM (INCH)		DO NOT SCALE DRAWING	SCALE 1:1.5