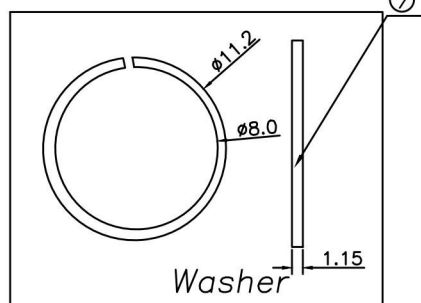
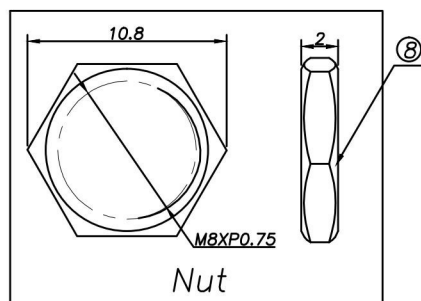
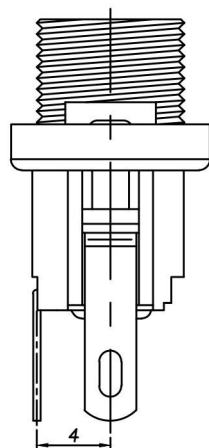
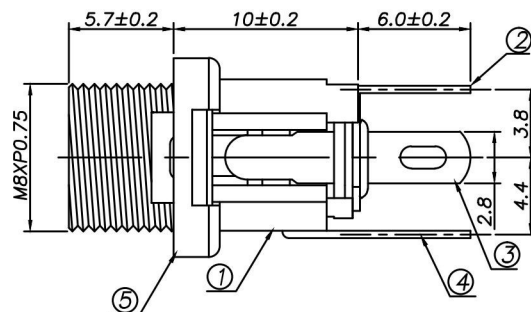
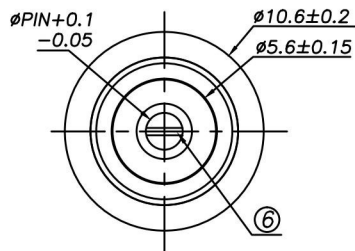



Plug

SPECIFICATION

1. Rated Load : 30V 0.5A;
2. Contact resistance: $\leq 30m\Omega$;
3. Insulation resistance: $\geq 100M\Omega$;
4. Withstand voltage: AC500V;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

Schematic		Pin	PART.No	
		2.0mm	DCS-5521-2	
		2.5mm	DCS-5525-2	
⑧	Nut	1	H62	N
⑦	Washer	1	Iron	N
⑥	Pin	1	H59Copper	N
⑤	Bushing	1	H62BRASS	N
④	Shunt Terminal ④	1	H62BRASS	Cu
③	Tip Spring ②	1	C5191QSn6.5	Cu
②	Center pin terminal ①	1	H62	Cu
①	Housing	1	PBT	B
NO.	DESCRIPTION	QTY	MATERIAL	F

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.	SCALE	TOLERANCE	PART NAME 品名 DC JACK SOLDER TYPE D=2,1 & 2.5mm
DWG.	参考	.0 ± 0.38 .00 ± 0.25 ANG. ± 0.40	
Helen	UNIT	SIZE.	
DATE	mm	A 4	PART NO. 料 號 DCS-552x-2
2020/5/19	PAGE	REV.	
	1 OF 1	B	