

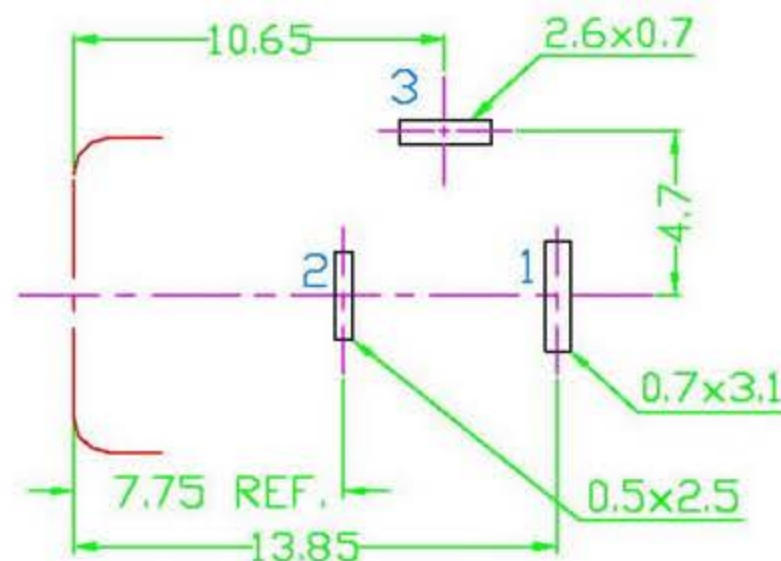
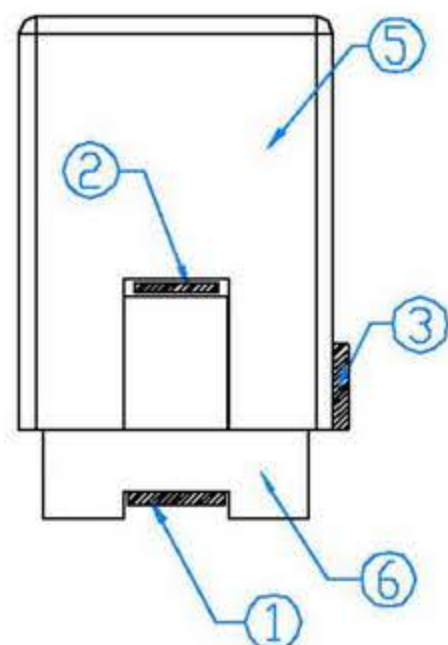
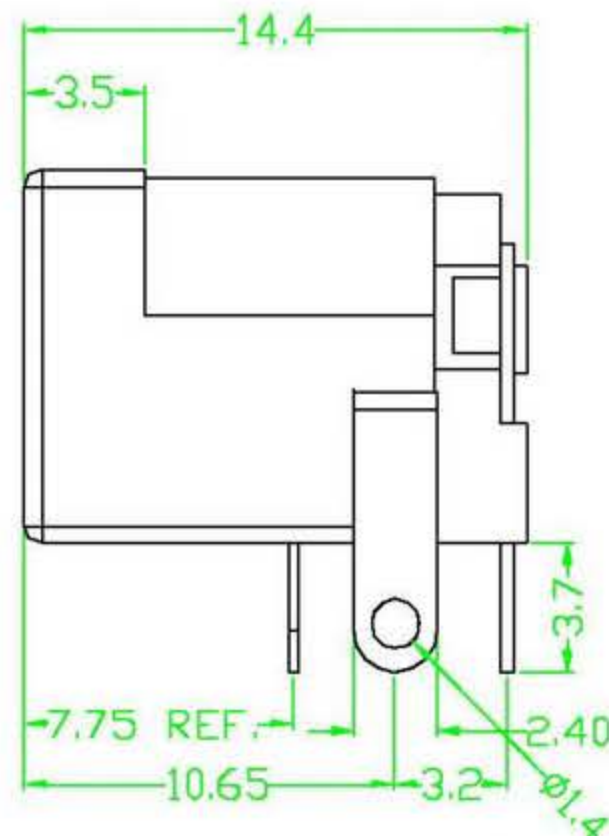


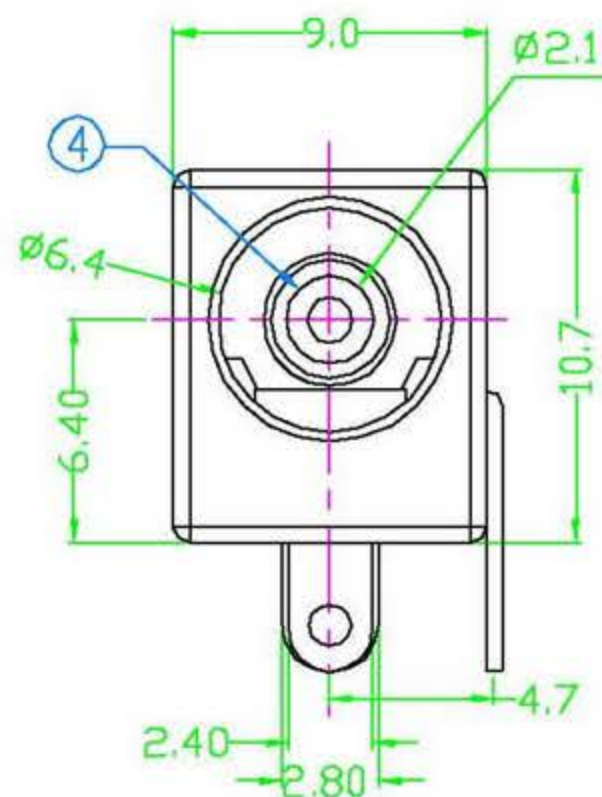

PCB LAYOUT
(BOTTOM VIEW)

Specification:

Contact Resistance: 30m Ohm Max. At AC 100mA Max .1KHz
 Insulation Resistance: 100M Ohm Min. At 500V DC
 Rated Voltage And Current: DC12V.2A Max; AC 100V.1A Max
 Dielectric Withstanding Voltage: 500V AC for 1 Minute
 Insertion Force: 3.0Kg Maximum.
 Extraction Force: 0.3Kg Minimum.



NO.	NAME	MATERIAL	FINISH	Q'TY
1	PIN TERM.	BRASS T:0.4	TIN PLATED	1
2	SLEEVE TERM.	PBS T:0.25	TIN PLATED	1
3	BREAK TERM.	BRASS T:0.4	TIN PLATED	1
4	CENTER PIN	BRASS Ø2.1	NICKEL PLATED	1
5	HOUSING	PBT G.F.	BLACK	1
6	BACK COVER	PBT G.F.	BLACK	1

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 HELEN

DWG.
製圖 ABBY

DATE 制表日
2012/03/12



SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
容許公差

SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

PART NAME 品名

DC Jack 5.5/2.1 Right angle

PART NO.

料號 DCS-5521-5