

Technical characteristics:

Specifications

DIN EN 60 664-1
DIN EN 61 984




Inserts

- 01. Number of contacts :24+PE
- 02. Rated Current :16A
- 03. Rated Voltage :500V
- 04. Pollution degree :3
- 05. Rated impulse voltage :6kv
- 06. Insulation resistance : $\geq 10^{10} \Omega$
- 07. Material:Polycarbonate
- 08. Rated voltage acc. to UL/CSA:600V
- 09. Limiting temperatures : $-40^{\circ}\text{C}\sim +125^{\circ}\text{C}$
- 10. Flammability acc.to UL94:V0
- 11. Mechanical working life (mating cycles) : ≥ 500

contacts

- 01. Material:Copper alloy
- 02. Surface:hard-silver plated
- 03. Terminal :Push-in terminal
- 04. Wire gauge :0.5-2.5mm² (AWG 20-14)
- 05. Stripping length :8-10mm

Note:Use only flexible wires with cold heads

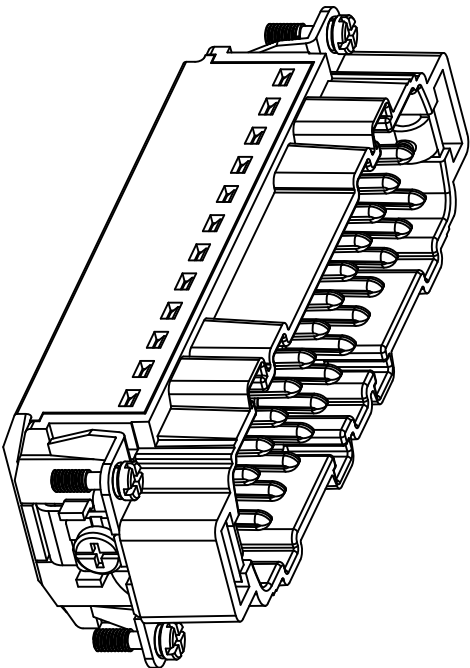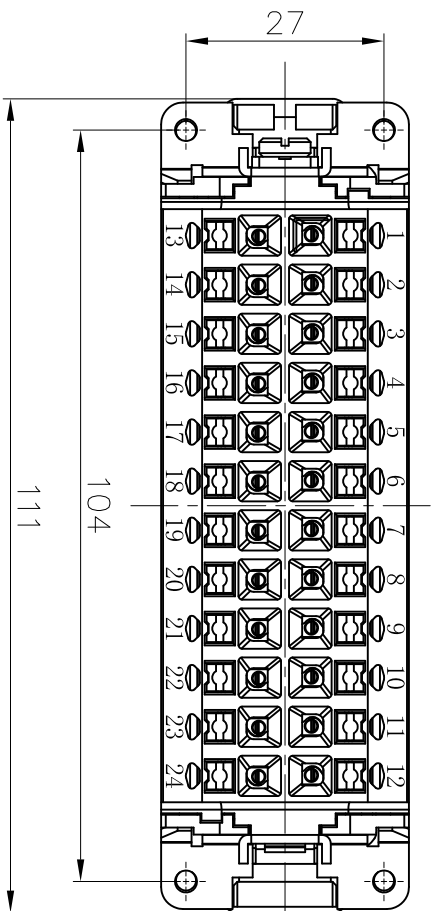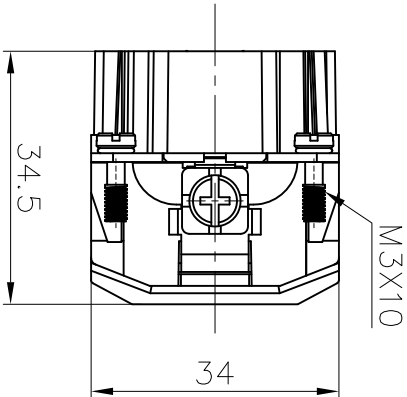

MATERIAL: SURFACE:

MAT NO.:

STATUS:

APPD: Zhou X 2021.07.13

CHKD: Yang SH 2021.07.13

NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD

DE-024-MP

DRAFT:Chen HK 2021.07.13

DRAWING NO.:

REV

ECN

DESCRIPTION

DRAFT

DATE

SIZE: A4

mm (inch)

TYPE: CUSTOMER DRAWING

SCALE: 1:1

SHEET

1/1