

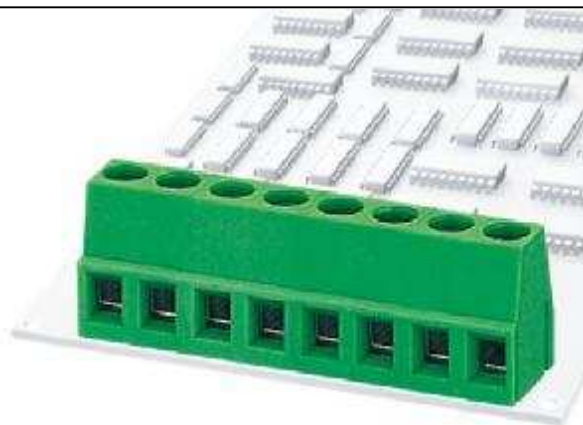
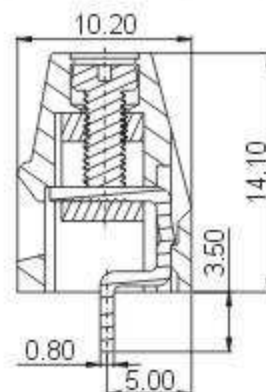
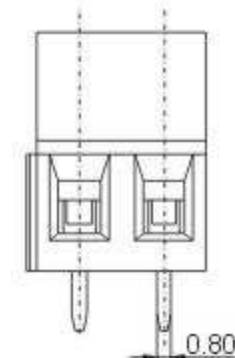




DG128-5.0



APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

300V

15A

24-12AWG

AC2000V/1Min

IEC

250V

18A

2.5mm²

Menchanical

Torque

0.4Nm(3.5Lb-In)

Ambient temperature

-40℃~+105℃

Strip length

7mm

Dimensions

pitch

5.0mm(.197")

Poles

2P,3P-24P

Material

Housing

PA66,UL94V-0

Screws

M2.5,Steel, Cr³⁺Znplated

Pin header

Brass,Tin-plated

Cage

Brass,Ni-plated

HOW TO ORDER :

	-			P	-	1		-	X	X	X
									Customer Request		



Series number

No.of pole

1	Single pitch
2	Double pitch

Color

1	Grey	4	Green	7	Trans Parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White



DEGSON ELECTRONICS CO., LTD.

NAME

DG128-5.0