


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

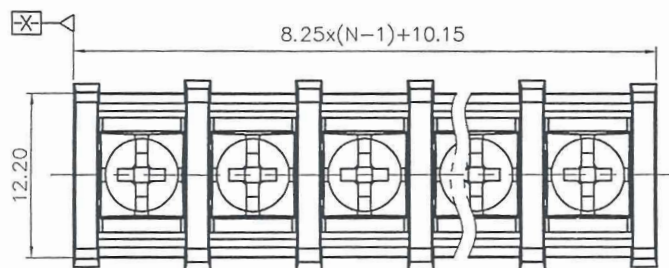

NOTES1:





1. Rated Voltage/Current : 300V / 20A
2. Torque Value : M3.0 , 4.43 Lb.in
3. Wire Range : 22~12AWG

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 8.25mm, Poles : N=02~24P
3. Withstanding Voltage : AC1600V/1Min.
4. Operating temperature: -40°C~+105°C
5. Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm						
TO	Over	TO	Over	TO	Over	TO	Over	
6	10	10	24	30	60	100	150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

6. RoHS Compliance

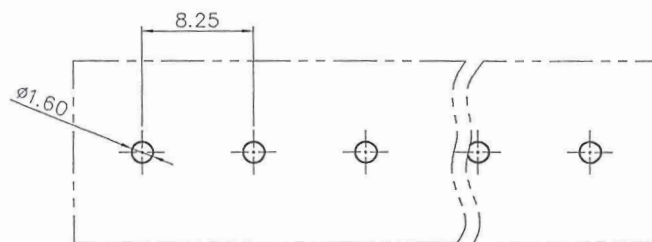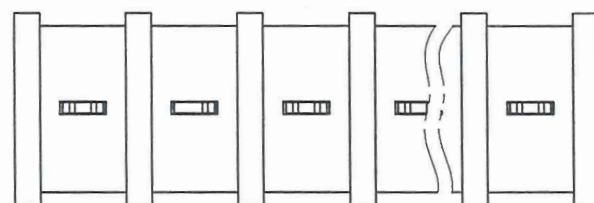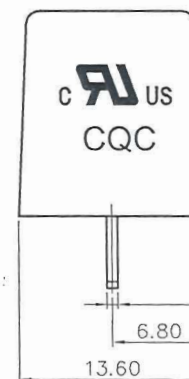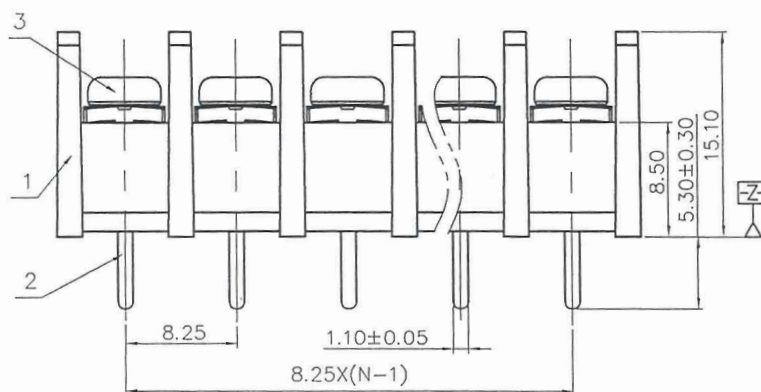

P.C.B LAYOUT



3	SCREW	STEEL	M3/Ni Plated
2	PIN HEADER	COPPER ALLOY	Sn Plated
1	HOUSING	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

PART NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: Aaxon 10/23-15		NAME: DG35C-B-XXP-1Y-200A(H)	
CHKD: Dicky 2015.10.23		TITLE: CUSTOMER DRAWING	
DRFT: NICK 09/28/15"		DRAWING NO.: DG35C-C35	REV TO-1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SHEET 1/1
MM (INCH)		SCALE	1:1