

1

2

3

4

5

6

7

8

A

B

C

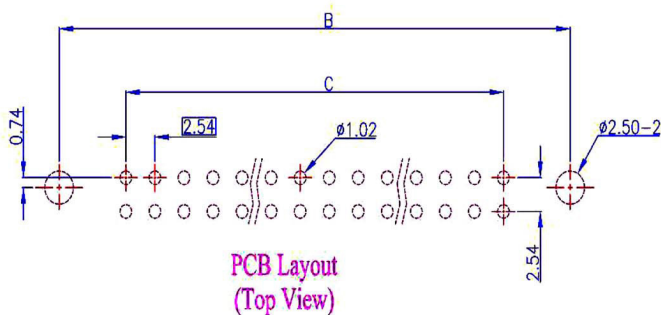
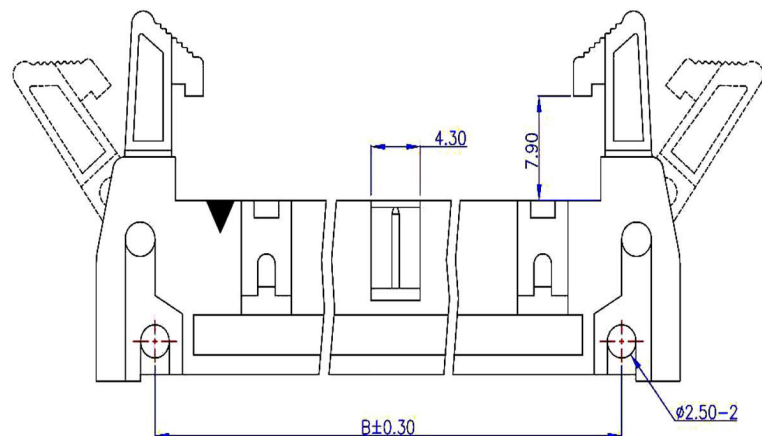
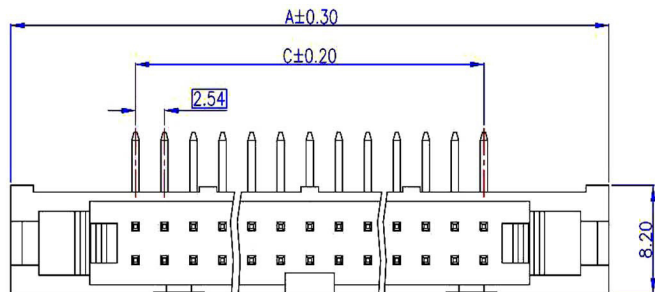
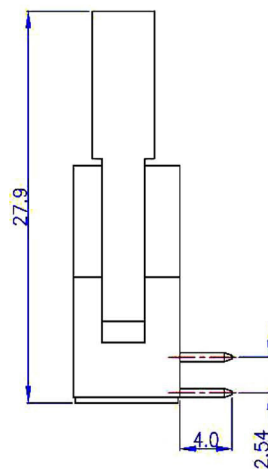
D

E

F

G

H

PCB Layout
(Top View)

Material and Finish

1. Housing: PBT (UL94V-0), Black.
2. Terminal: Sq. 0.64mm Copper Alloy, Gold Plating.

Electrical Characteristics


1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 1000V DC.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

Dimensions

Pos.	A	B	C
10	32.00	21.84	10.16
12	34.54	24.38	12.70
14	37.08	26.92	15.24
16	39.62	29.46	17.78
20	44.70	34.54	22.86
24	49.78	39.62	27.94
26	52.32	42.16	30.48
30	57.40	47.24	35.56
34	62.48	52.32	40.64
40	70.10	59.94	48.26
50	82.80	72.64	60.96

RoHS
Compliant**T&T Connection System Co., Ltd.**APPD.
核准
BettyDWG.
製圖
BettyDATE 制表日
2012/11/01SCALE
比例 參考UNIT
單位 M MPAGE
張數 1 OF 1TOLERANCE
容許公差
.0 ± 0.30
.00 ± 0.20
ANG. ± 3°SIZE
紙張尺寸 A 4REV.
版次 A

PART NAME 品名

2.54x2.54mm FULLY SHROUDED
HEADER 90° LONG LATCH

PART NO.

料號 DHR-xx