


REV	DESCRIPTION	DATE
-----	-------------	------

△ RDK-97048

張馨尹 2009/07/06

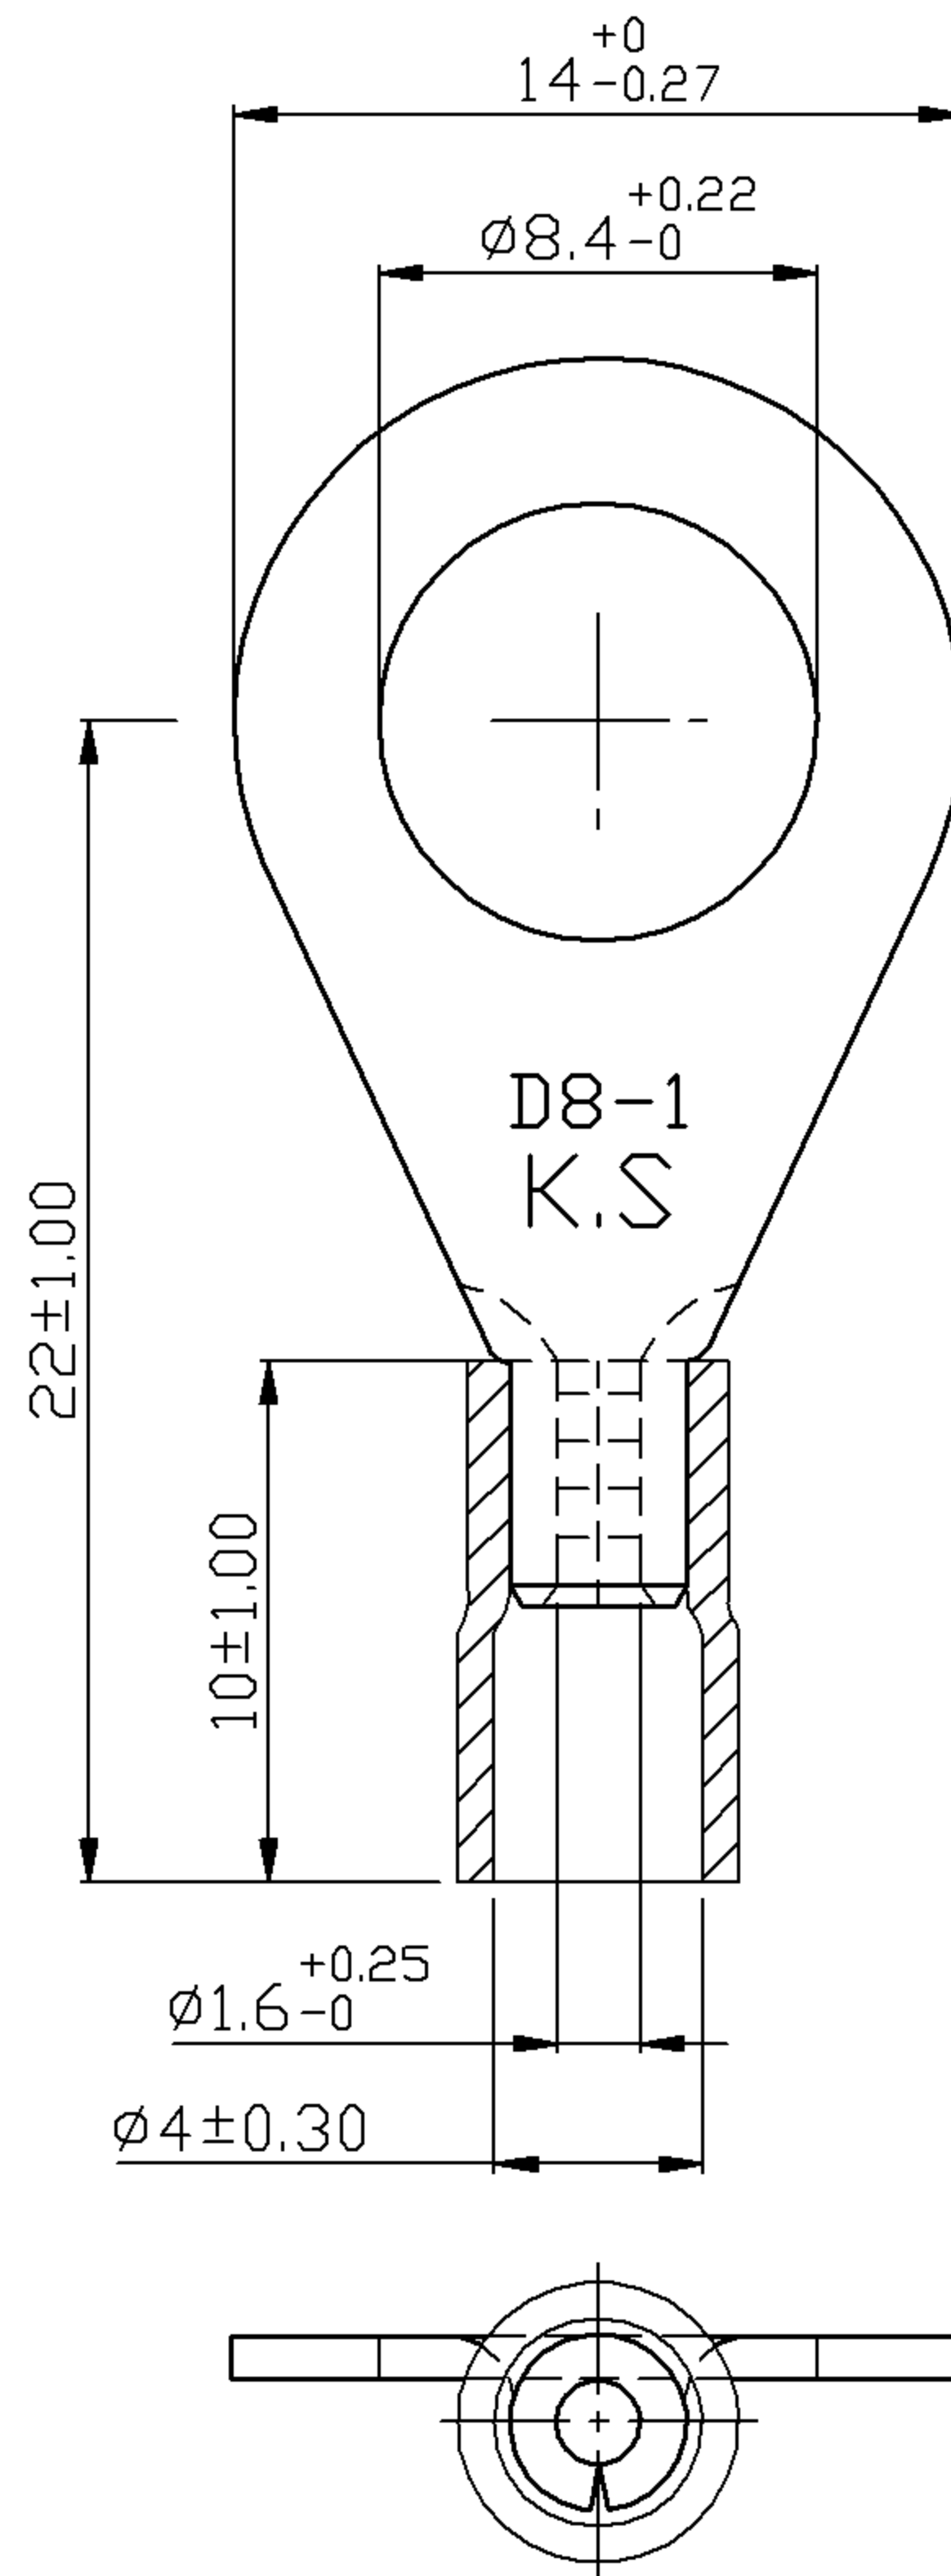

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
 2. MAXIMUM ELECTRICAL RATING : $\triangle$ 105°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : VINYL
 4. INSULATION COLOR : RED
 5. TERMINAL MATERIAL : COPPER
 6. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
 7. TERMINAL SURFACE TREATMENT : TIN PLATED
 8. TERMINAL THICKNESS : 0.80 mm

Tolerance Unless Otherwise Specified			
0 > 6 mm	± 0.20	ANGLE	
6 > 18 mm	± 0.30	0° >	° REF ±
18 > 30 mm	± 0.40	° >	° ±
30 > 75 mm	± 0.50	° >	° ±

NAME	VINYL-INSULATED RING TERMINALS				UNIT	mm	
PART NO.	DRV8-1	MATERIAL	-----	APPROVE			
NUMBER	KA-95787-C	SCALE	SHEET	PAGE	CHECKED		
DATE	2006/07/10	3/1	1-1	10F2	DRAWN	張馨尹	

KST. K.S. TERMINALS INC.