

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/02/06'		

NOTES:

1. ELECTRICAL CHARACTERISTICS:

- 1.1 CONTACT RESISTANCE: 20mΩ Max.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 1000MΩ Min.

2. ENVIRONMENT CHARACTERISTICS:

- 2.1 OPERATING TEMPERATURE: -40°C~+105°C.

3. PRODUCT NUMBER CODE:

DS1002-01 - X X X X

Clip plating

- 1: Tin 150u"
- 2: Tin 200u"
- 3: G/F
- 4: Gold 3u"
- 5: Gold 10u"
- 6: Gold 15u"

Pin plating


- 1: Tin 150u"
- 2: Tin 200u"
- 3: G/F
- 4: Gold 3u"
- 5: Gold 10u"
- 6: Gold 15u"

Mounting type

- V: V/T TYPE
R: R/A TYPE
S: SMT TYPE

No. of contacts


- 1*1 - 1*64
2*1 - 2*40

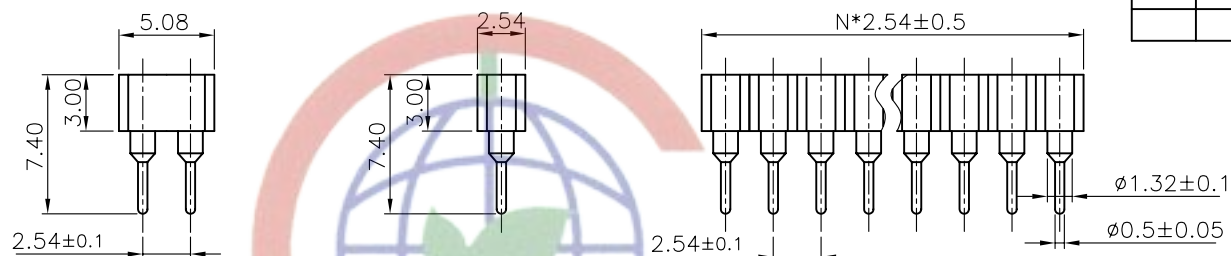

Dual rows

Single row


V/T TYPE

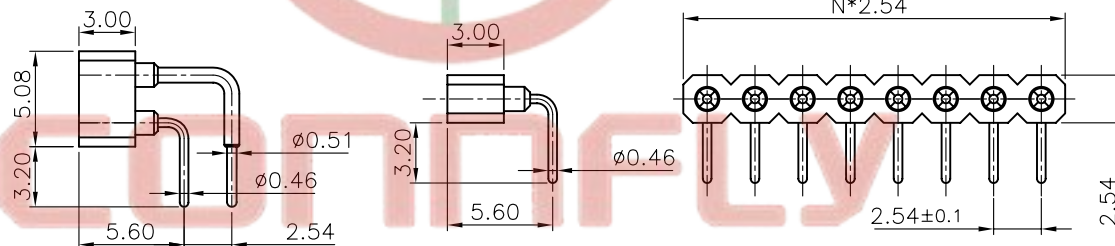

Dual rows

Single row

R/A TYPE

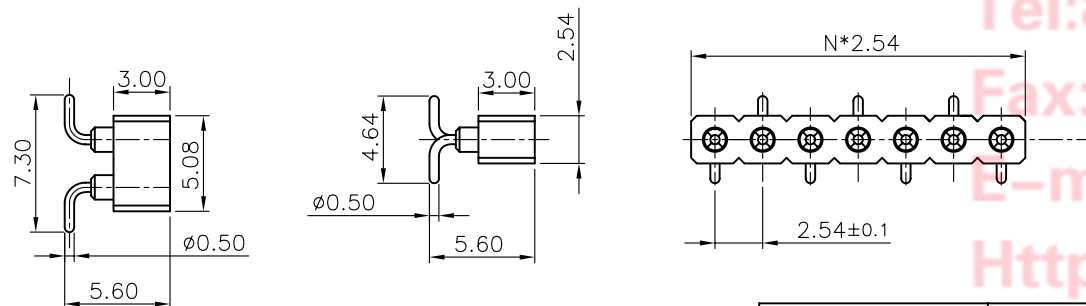

Dual rows

Single row

SMT TYPE

N: No. of contacts

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IC SOCKET R/A & V/T & SMT	
X.	±0.60	X.	±5°	UNITS	mm		PITCH 2.54mm	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1002-01 SERIES	
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	10F1					
DRAWING NO.	C-DS1002-01-XXXX							



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

Http://www.connfly.com