

| REV. | DESCRIPTION | DRAWN       | CHECKED | APPROVED |
|------|-------------|-------------|---------|----------|
| A    | NEW RELEASE | HP 18/07/05 |         |          |
|      |             |             |         |          |
|      |             |             |         |          |
|      |             |             |         |          |

# NOTES:

## 1. MATERIALS

- . Insulator: thermoplastic,UL 94V-0 Rated
- . Contacts: Copper Alloy
- . Shell: Copper Alloy








## 2. SPECIFICATION

- . Contact resistance: 50mΩ max.
- . Insulation resistance: 100MΩ min.
- . Dielectric withstanding voltage: 100 VAC 1 minute.
- . Temperature range: -40°C to +80°C.

## 3. PRODUCT NUMBER CODE:

DS1114 - X X X X X

- Packing type  
R:Tape on reel  
B:Tube
- MYLAR SUPPORT  
S:W/ mylar  
X:W/O mylar
- Contact plating  
0: selective gold flash  
C: selective 3u" gold  
1: selective 10u" gold
- Shell plating  
6: Tin  
N: Nickel
- Color of housing  
B: Black

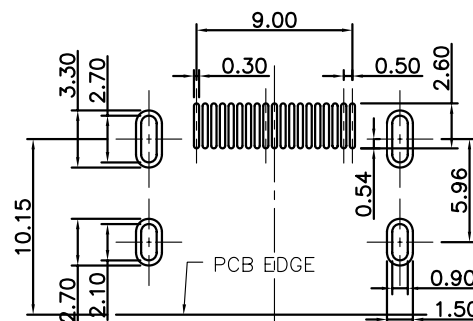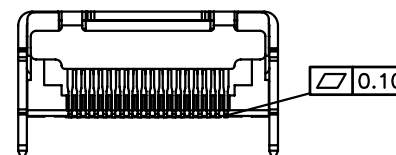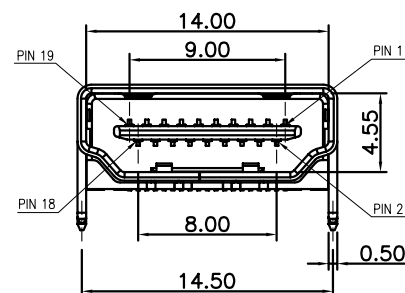

RECOMMEND P.C.B LAYORT  
(Tolerance±0.05)

|                   |                |                 |        |                                                                                                                                                        |                                                                                       |                                      |        |
|-------------------|----------------|-----------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------|--------|
| GENERAL TOLERANCE |                | ANGLE TOLERANCE |        | PROJECTION                                                                                                                                             |  | TITLE                                |        |
| X. ±0.60          |                | X. ±5°          |        | UNITS                                                                                                                                                  | mm                                                                                    | HDMI 19PIN Female SMT WITHOUT FLANGE |        |
| .X ±0.38          |                | .X ±3°          |        | SHEET SIZE                                                                                                                                             | A4                                                                                    | SERIES                               | DS1114 |
| .XX ±0.25         |                | .XX ±2°         |        |                                                                                                                                                        |                                                                                       |                                      |        |
| DRAWING TYPE      | CUSTOMER       |                 |        | <div>晨翔电子有限公司</div> <div>CONNFLY CONNFLY ELECTRONIC CO. LTD</div> |                                                                                       |                                      |        |
| SCALE             | 1:1            | SHEET           | 1 OF 1 |                                                                                                                                                        |                                                                                       |                                      |        |
| DRAWING NO.       | C-DS1114-XXXXX |                 |        |                                                                                                                                                        |                                                                                       |                                      |        |