

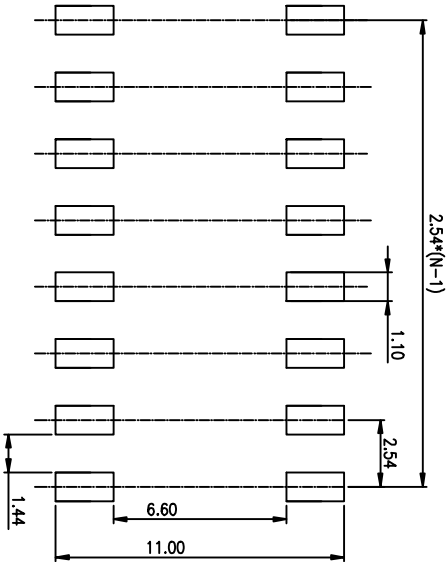
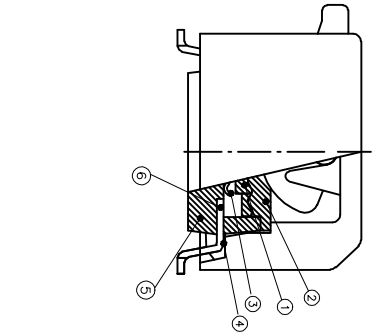
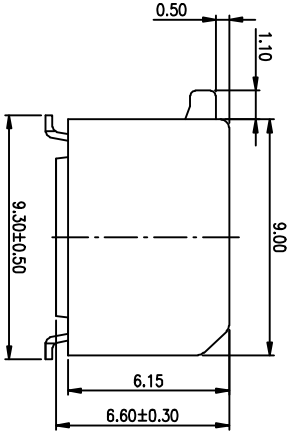


PRODUCT NO.	RoHS compliant
DSPV08LSGET	

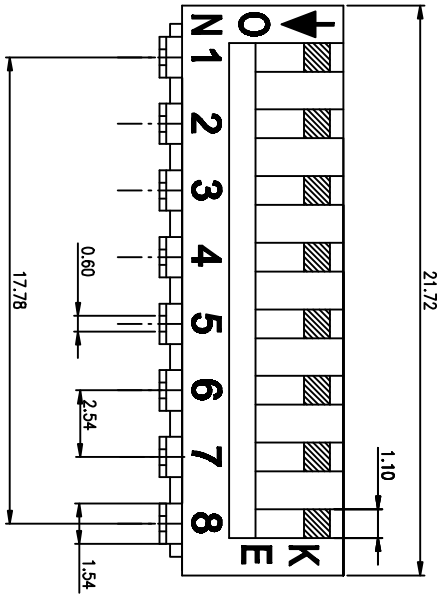

NOTES : 1 Specification:

- 1>.Operating force:1000gf Max
 - 2>.Operating Temperature: -40° to+85°
 - 3>.Storage Temperature: -40° to+85°
 - 4>.Mechanical Life: 3000cycles minimum
 - 5>Electrical Life: 2000cycles minimum
2. PLATING:
GOLD FLASH 1u”(min.) SOLDERTAL,
3u” GOLD PLATING ON THE CONTACT AREA,
WITH 50u” NICKEL UNDERPLATINGOVERALL.
3. CONTACT RATING:
1.SWITCHING: 25mA at 24VDC
2.NON-SWITCHING: 100mA at 50VDC
WITH 50u” NICKEL UNDERPLATINGOVERALL.

4. PART NUMBER DESCRIPTION :

DS XX T S G E T
[Packing: T=Tube R=Reel]
[Finish: F=3u” Gold-plated F=10u” Gold-plated]
[Finish: G=Full Gold S=Contact-Gold-plated]
[Terminal: S=SMD type H=Straitght.....]
[Actuator: T=Tape sealed S=Low profile W/O Tape L=Extension]
[HP=Half Pitch KC=IC type PY=Plano type]

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY		TITLE			
				UNER	ANGLES	PROJECTION		BY DSPV SERIES PITCH 2.54mm			
①	Actuator	UL94 V0	White	0 ± 0.25	0 ± 2°			PRODUCT FAMILY DSPV SERIES			
②	Cover	UL94 V0	Black	00 ± 0.15	.0 ± 1°			PRAT NO. DSPV08LSGET			
③	Movable	Copper Alloy	3u” Gold	.000± 0.10	.00± 0.5°			FILE NO. DSPV08LSGET-A			
④	Terminal	Brass	1u” Gold					SIZE UNIT SCALE SHEET REV.			
⑤	Base	UL94 V0	Black					A4 mm 2 : 1 1OF 1 A			
⑥	Terminal Contact	Brass	3u” Gold								