

LARGE CAN TYPE

LP Series

Snap-in Terminal Type, Standard

JAMICON®

HV ← LP → HP




- Three kinds of terminal are available for your use.
- Withstanding 2000 hours application of high ripple current at 85°C.

SPECIFICATION


Item	Characteristic																				
Operation Temperature Range	-40 ~ +85°C								-25 ~ +85°C												
Rated Working Voltage	10 ~ 100VDC								160 ~ 450VDC												
Capacitance Tolerance (120Hz 20°C)	±20%(M)																				
Leakage Current (20°C)	I ≤0.03CV or 3 (mA) *Whichever is smaller after 5 minutes I : Leakage Current(μA) C : Rated Capacitance(μF) V : Working Voltage(V)																				
Surge Voltage (20°C)	W.V.	10	16	25	35	50	63	100	160	200	250	350	400	450							
	S.V.	13	20	32	44	63	79	125	200	250	300	400	450	500							
Dissipation Factor (tan δ) (120Hz 20°C)	Rated Voltage (V)		10		16		25		35		50		63		100		160~250		350~450		
	tan δ	CV ≤ 100,000		0.50		0.40		0.35		0.25		0.25		0.25		0.20		0.20		0.25	
		CV > 100,000		0.60		0.50		0.45		0.35		0.30		0.30		0.25		0.20		0.25	
Low Temperature Stability	Impedance ratio at 120Hz																				
	Rated Voltage (V)					10~100					160~250					350~450					
	-25°C / +20°C					4					6					8					
	-40°C / +20°C					15					—					—					
Load Life	After 2000 hours application of W.V. at +85°C, the capacitor shall meet the following limits.																				
	Capacitance Change			≤ ±20% of initial value																	
	Dissipation Factor			≤150% of initial specified value																	
	Leakage current			≤initial specified value																	
Shelf Life	At +85°C no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (with voltage treatment)																				

TERMINAL TYPE


▲ P.C.B. TERMINAL (SNAP IN) SYMBOL:W(φ22~35)

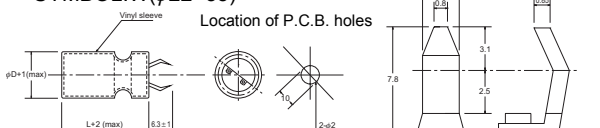


▲ P.C.B. TERMINAL SYMBOL:V(φ25~35)

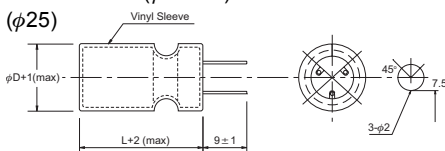


(φ35) A.B. blank terminals

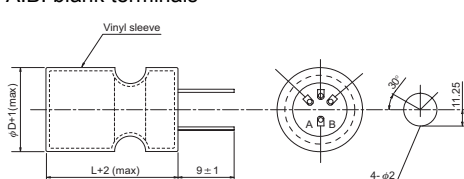

▲ LUG TERMINAL SYMBOL:G(φ22~35)

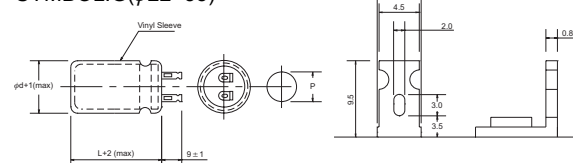

φD	22	25	30	35
P	8	10	10	14

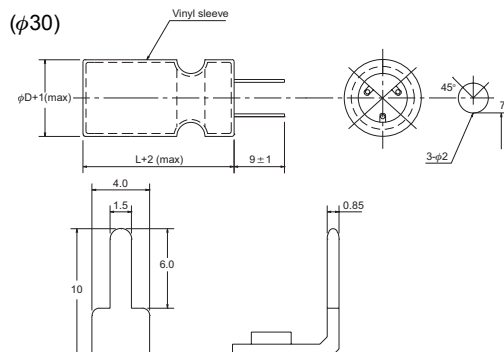

RIPPLE CURRENT COEFFICIENTS

Temperature(°C)	45	60	70	85
Multiplier	1.55	1.30	1.20	1.00

Frequency(Hz)	60	120	1K	10K	100K
W.V.	Multiplier				
10~35V	0.90	1.00	1.05	1.10	1.10
50~100V	0.90	1.00	1.15	1.20	1.20
160~250V	0.80	1.00	1.35	1.45	1.50
350~450V	0.90	1.00	1.30	1.40	1.45

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
Max ripple current : A(rms) 85°C 120Hz

μF	V(Code) Code Item	10 (1A)		16 (1C)		25 (1E)		35 (1V)	
		DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
3300	332					22x25	2.03	22x25	2.04
						25x25	2.09	25x25	2.10
4700	472			22x25	1.81	22x30	2.43	22x30	2.41
				25x25	2.21	25x25	2.31	30x25	2.44
6800	682			22x25	2.40	22x35	2.87	22x40	2.98
				25x25	2.47	30x25	2.72	30x30	2.86
8200	822	22x25	2.39	22x30	2.70	22x40	3.16	22x45	3.25
		25x25	2.46	30x25	2.73	30x30	3.03	35x30	3.42
10000	103	22x30	2.69	22x35	3.00	22x45	3.45	25x45	3.41
		25x25	2.57	30x25	2.84	30x30	3.14	35x30	3.51
12000	123	22x30	2.81	22x40	3.30	22x50	3.74	25x50	3.68
		30x25	2.84	30x30	3.16	35x30	3.75	35x35	3.84
15000	153	22x35	3.14	22x45	3.62	25x45	3.78	30x45	4.08
		30x25	2.97	35x25	3.55	35x30	3.89	35x40	4.47
22000	223	22x45	3.79	25x45	4.25	30x50	4.94	35x45	5.68
		30x30	3.45	35x30	4.37	35x40	5.17		
33000	333	25x45	4.99	30x45	5.48	35x50	6.95	35x70	8.42
		35x30	4.89	35x40	6.01				
47000	473	30x45	5.97	35x45	7.53	35x60	8.97		
		35x40	6.54						
68000	683	35x50	8.64	35x60	10.24				

μF	V(Code) Code Item	50 (1H)		63 (1J)		100 (2A)	
		DxL	R.C.	DxL	R.C.	DxL	R.C.
820	821					22x30	1.55
						25x25	1.54
1000	102			22x25	1.42	22x30	1.71
				25x25	1.46	30x25	2.20
1500	152			22x25	1.74	22x40	2.38
				30x25	1.81	35x30	2.54
2200	222	22x25	1.92	22x30	2.08	25x45	2.77
		25x25	1.98	30x25	2.10	35x30	2.85
3300	332	22x35	2.51	22x45	2.81	30x45	3.27
		30x25	2.38	35x25	2.76	35x35	3.39
4700	472	22x40	2.89	25x45	3.11	35x45	4.01
		35x25	2.99	35x30	3.20		
6800	682	25x45	3.37	30x45	3.54	35x60	4.85
		35x30	3.46	35x35	3.68		
8200	822	25x50	3.62	30x50	3.81	35x70	5.30
		35x35	3.79	35x40	3.99		
10000	103	30x45	3.72	35x50	4.48	35x70	5.49
		35x35	3.86				
12000	123	35x45	4.53	35x60	5.13		
15000	153	35x50	5.30				

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
Max ripple current : A(rms) 85°C 120Hz

μF	Code	V(Code) Item	160 (2C)		200 (2D)		250 (2E)	
			DxL	R.C.	DxL	R.C.	DxL	R.C.
220	221				22x25	0.97	22x20	1.14
					25x25	1.00	25x25	1.09
330	331		22x25	1.11	22x30	1.29	22x40	1.58
			25x25	1.14	25x25	1.23	30x25	1.42
470	471		22x35	1.53	22x40	1.74	22x50	2.09
			30x25	1.45	30x25	1.55	30x35	1.93
560	561		22x35	1.67	22x45	2.00	25x45	2.29
			30x25	1.58	30x30	1.82	35x30	2.22
680	681		22x40	1.95	25x40	2.14	30x40	2.46
			30x30	1.87	30x35	2.14	35x35	2.68
820	821		22x50	2.36	25x50	2.59	30x45	2.83
			30x30	2.05	35x30	2.55	35x40	3.11
1000	102		25x45	2.55	30x45	2.87	35x45	3.60
			35x30	2.62	35x35	2.99		
1500	152		30x45	3.28	35x50	4.24		

μF	Code	V(Code) Item	350 (2V)		400 (2G)		450 (2W)	
			DxL	R.C.	DxL	R.C.	DxL	R.C.
47	470				22x25	0.43	22x25	0.36
					25x25	0.45	25x25	0.37
100	101		22x30	0.66	22x30	0.68	22x35	0.61
			25x25	0.63	25x25	0.65	25x30	0.59
150	151		22x35	0.86	22x40	0.95	22x50	0.88
			30x25	0.82	30x25	0.85	30x30	0.76
220	221		22x45	1.17	22x50	1.27	25x50	1.08
			30x30	1.06	25x40	1.17	35x35	1.13
330	331		25x50	1.53	30x45	1.59	35x45	1.53
			35x35	1.60	35x35	1.65		
470	471		30x50	1.92	35x45	2.19		
			35x40	2.01				
560	561		35x45	2.31				