


- High ripple current, low E.S.R. and long life.
- Suitable for output of switching power supplies.




SPECIFICATION

Item	Characteristic							
Operation Temperature Range	-55 ~ +105°C							
Rated Working Voltage	10 ~ 100VDC							
Capacitance Tolerance (120Hz 20°C)	±20%(M) +50% -10%(T)							
Leakage Current (20°C)	I ≤0.01CV *after 3 minutes I : Leakage Current (μA) C : Rated Capacitance (μF) V : Working Voltage (V)							
Surge Voltage (20°C)	W.V.	10	16	25	35	50	63	100
	S.V.	13	20	32	44	63	79	125
Dissipation Factor (tan δ) (120Hz 20°C)	Add 0.02 per 1000 μF for more than 1000 μF							
	W.V.	10	16	25	35	50	63	100
	tan δ	0.12	0.10	0.09	0.08	0.07	0.06	0.06
Low Temperature Stability	Impedance ratio at 120Hz							
	Rated Voltage (V)		10~16			25~100		
	-25°C / +20°C		3			2		
	-55°C / +20°C		6			4		
Load Life	After hours (φD≤8mm 2000 hours, φD≥10mm 3000 hours) application of W.V. at +105°C, the capacitor shall meet the following limits.							
	Capacitance Change		≤±20% of initial value					
	Dissipation Factor		≤200% of initial specified value					
	Leakage current		≤initial specified value					
Shelf Life	At +105°C no voltage application after 1000 hours the capacitor shall meet the following limits. (with voltage treatment)							
	Capacitance Change		≤±20% of initial value					
	Dissipation Factor		≤200% of initial specified value					
	Leakage current		≤200% of initial specified value					

DIMENSIONS (mm)

ϕD	8	10	12.5	16	18
F	3.5	5.0	5.0	7.5	7.5
d	0.6	0.6	0.6	0.8	0.8
α	1.5	1.5	1.5	1.5	1.5

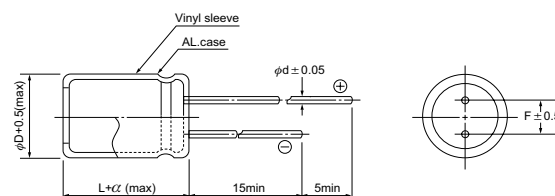

RIPPLE CURRENT COEFFICIENTS

Temperature(°C)	65	75	85	95	105
Multiplier	2.12	1.92	1.69	1.50	1.00

Frequency(Hz)	60	120	400	1k	10k	100k
W.V.	Multiplier					
10~16V	0.45	0.60	0.83	0.94	0.98	1.00
25~35V	0.38	0.50	0.75	0.90	0.97	1.00
50~100V	0.36	0.46	0.70	0.88	0.94	1.00

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
 Max impedance : Ω 20°C 100kHz
 Max ripple current : A(rms) 105°C 100kHz

V(Code)		10 (1A)			16 (1C)			25 (1E)		
μF	Code Item	DxL	IMP.	R.C.	DxL	IMP.	R.C.	DxL	IMP.	R.C.
100	101			→	8x11.5	0.348	0.27	8x11.5	0.330	0.34
220	221	8x11.5	0.190	0.36	8x15	0.180	0.44	10x16	0.170	0.59
330	331	8x15	0.152	0.50	10x16	0.144	0.57	10x18	0.136	0.76
470	471	10x16	0.124	0.62	10x18	0.118	0.71	10x20	0.112	0.95
680	681	10x18	0.098	0.78	10x20	0.093	0.90	12.5x20	0.088	1.21
1000	102	10x20	0.080	1.00	12.5x20	0.076	1.16	12.5x25	0.072	1.62
2200	222	12.5x25	0.046	1.61	12.5x30	0.043	1.89	12.5x40	0.041	2.70
3300	332	12.5x30	0.038	2.00	12.5x40	0.036	2.44	16x40	0.034	3.04
4700	472	12.5x40	0.032	2.50	16x40	0.031	2.64			

All blank voltage on sleeve marking is the same voltage as" → "point to.

V(Code)		35 (1V)			50 (1H)		
μF	Code Item	DxL	IMP.	R.C.	DxL	IMP.	R.C.
47	470			→	8x11.5	0.453	0.29
68	680	8x11.5	0.374	0.30	8x15	0.352	0.39
100	101	8x15	0.311	0.40	10x16	0.292	0.49
220	221	10x18	0.161	0.66	10x20	0.151	0.80
330	331	10x25	0.129	0.93	12.5x20	0.121	1.04
470	471	12.5x20	0.105	1.07	12.5x25	0.099	1.37
680	681	12.5x25	0.083	1.42	12.5x30	0.078	1.79
1000	102	12.5x30	0.068	1.87	12.5x40	0.064	2.48
2200	222	16x40	0.039	2.83			

V(Code)		63 (1J)			100 (2A)		
μF	Code Item	DxL	IMP.	R.C.	DxL	IMP.	R.C.
47	470	8x15	0.424	0.35	10x25	0.368	0.44
68	680	10x16	0.330	0.43	12.5x20	0.286	0.51
100	101	10x18	0.274	0.55	12.5x25	0.238	0.68
220	221	12.5x20	0.142	0.92	16x35.5	0.123	1.19
330	331	12.5x25	0.113	1.24	18x40	0.098	1.64
470	471	12.5x30	0.093	1.61			
680	681	16x35.5	0.073	2.09			