




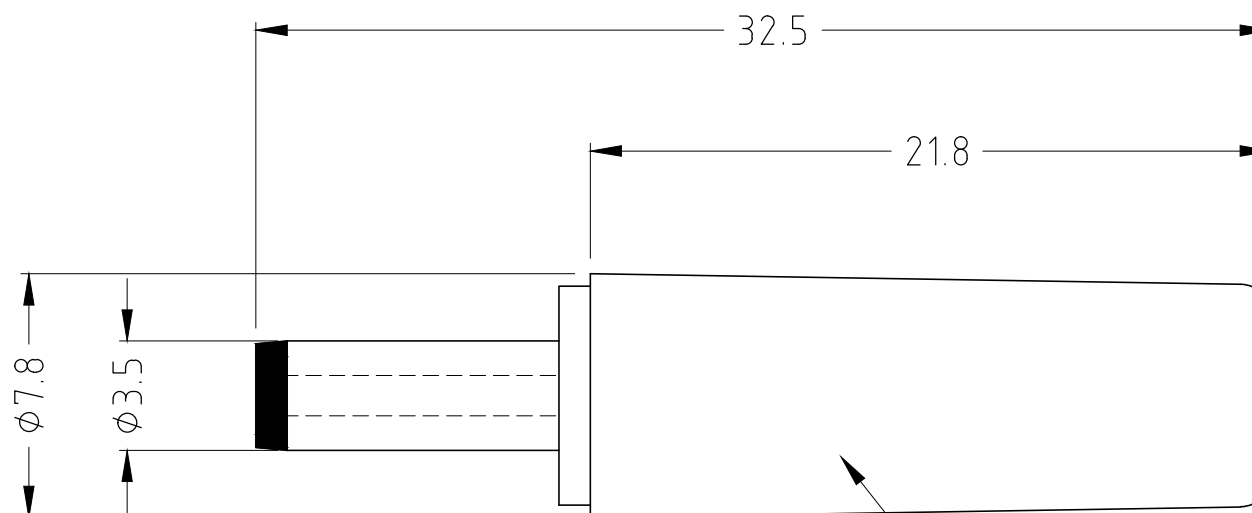

— BLACK
COVER

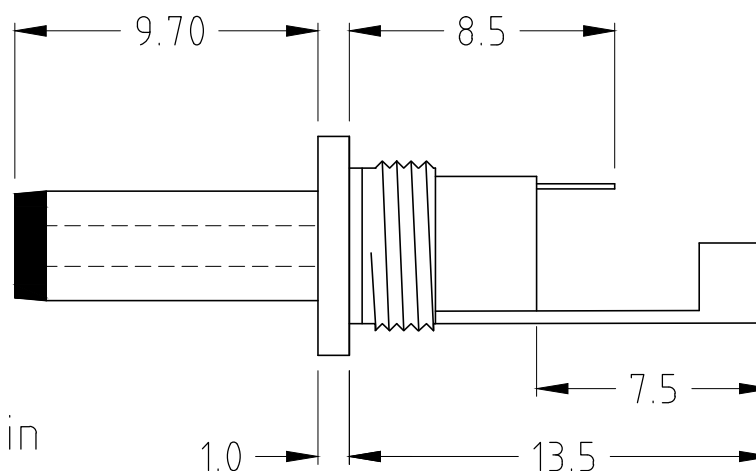

Nominal Rating: 12V 5A (60VA)
Dielectric Strength: AC 500V/1min
Insulation Resistance: DC 500V/100MΩ

RoHS
✓ COMPLIANT

TOLERANCE
NO DEC. PLACE ± 0.50
1 DEC. PLACE ± 0.25
2 DEC. PLACE ± 0.10
HOLE $\varnothing \pm 0.10$
ANGLES $\pm 1/2^\circ$
UNLESS
OTHERWISE STATED

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

3rd ANGLE PROJECTION: 

DO NOT SCALE

MATERIAL:	ABS / POM / BRASS
-----------	-------------------

TITLE: DC CONNECTOR DCP3 Ø1.30 (FLANGED)

FINISH:	AS MOULDED / Ni PLATED
---------	------------------------

DRWG. No. FA67555

FORM: A4DRWGH

DRAWN: T.J.O.

APPROVED: D.P.J.

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED
TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 2015