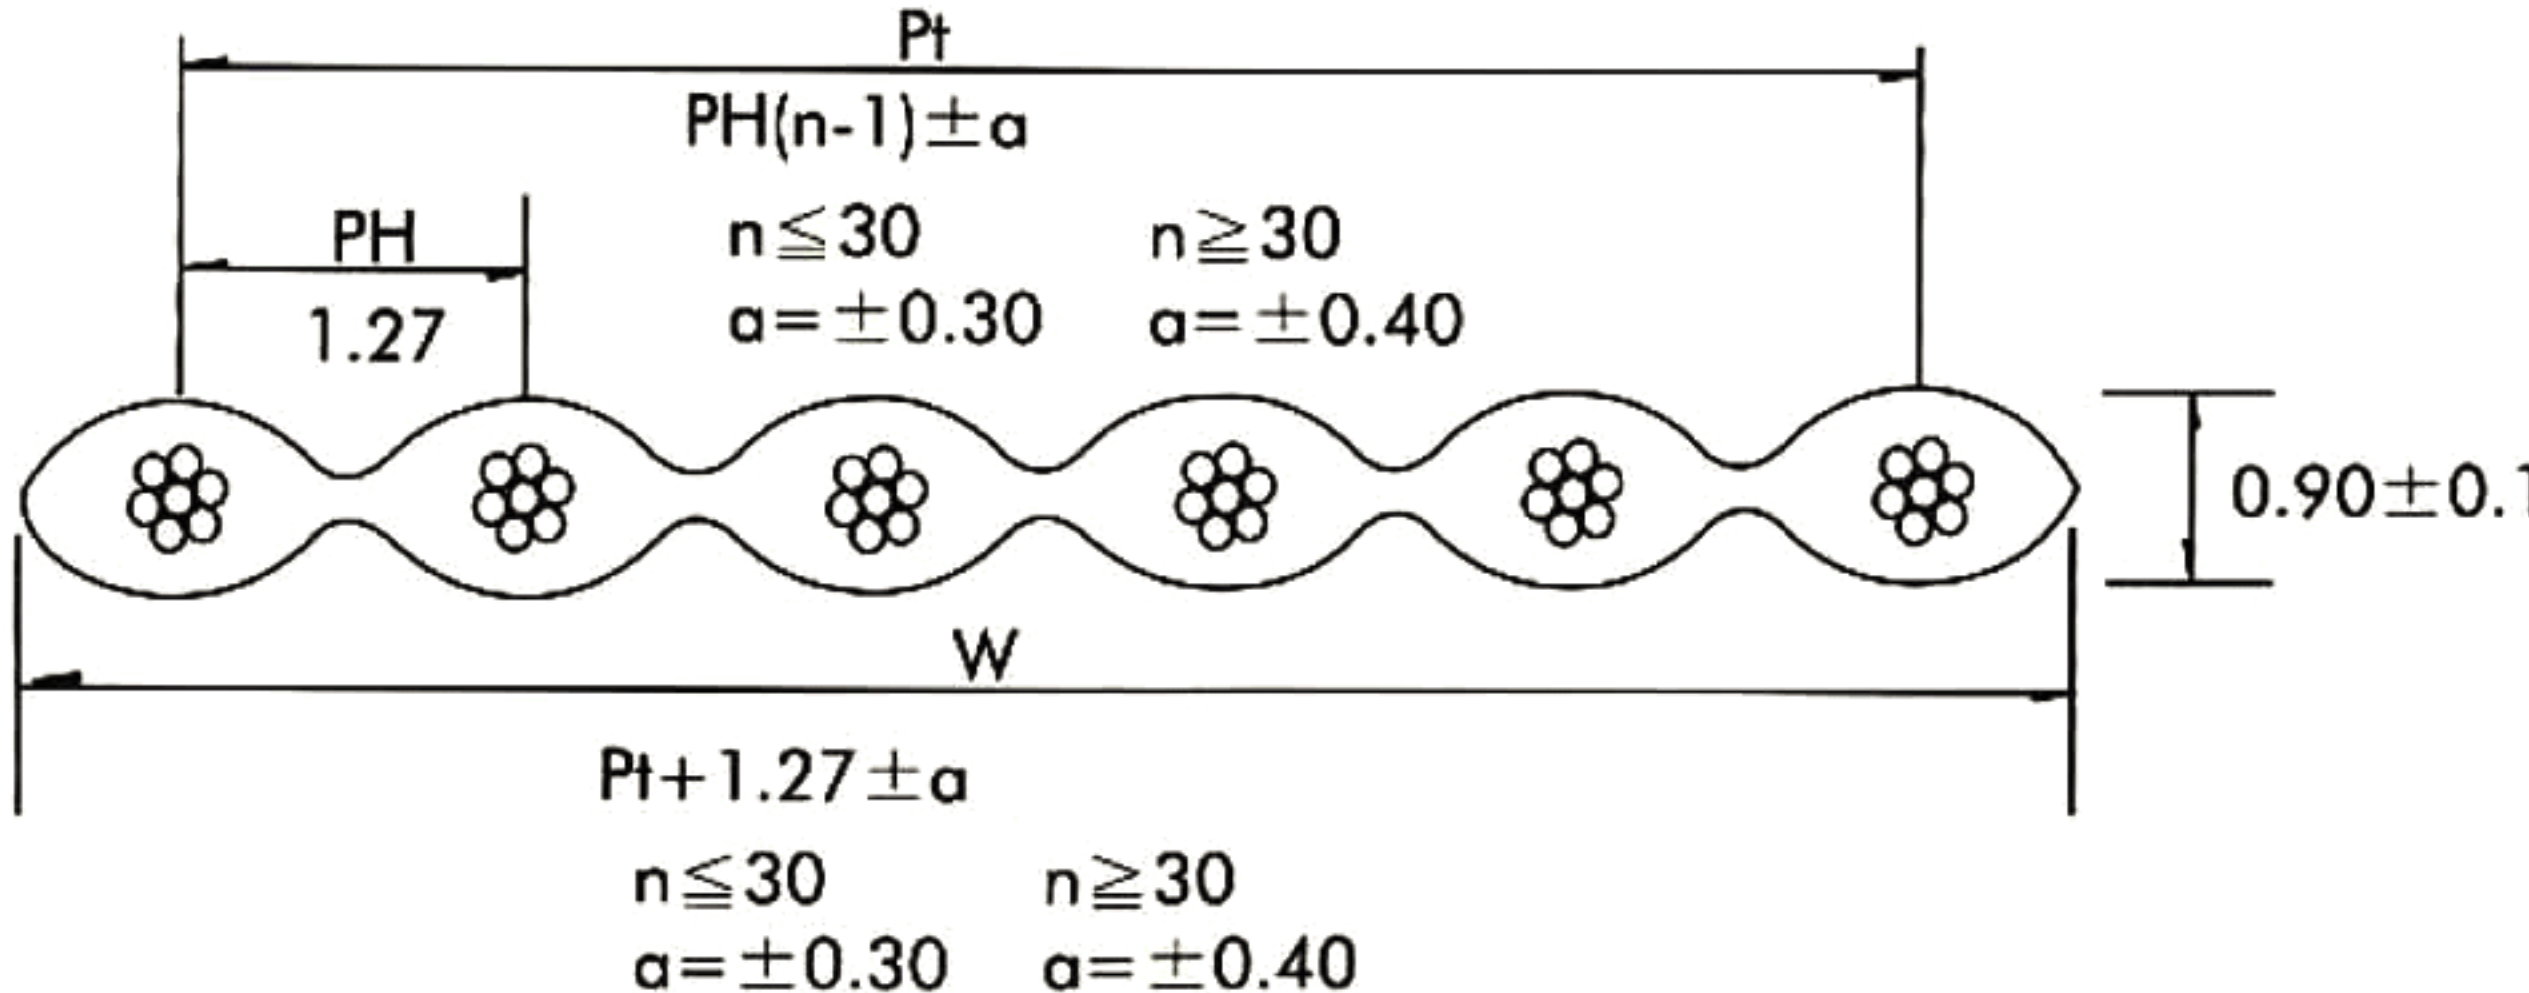


	1	2	3	4	5	6	7	8
A	UL & CSA GRADE: UL STYLE : 20029 Rate temperature : 105°C Rate voltage : 300V Flame Test : VW-1 CSA STYLE : C22.2 No.210.2 Rate temperature : 105°C Rate voltage : 300V Flame Test : FT1,FT2				CONSTRUCTION DRAWING : 			
B	CONDUCTOR: Stranded AWG size : 28 AWG Number of strands in each conductor : 7/0. 127mm Lay of strands in each conductor : 0.5 inch at least Cross sec. area : 156mil				USAGE : Internal connection for computer, duplicator, facsimile, game, interface and many other electronic equipments.			
C	INSULATION : Material of insulation : polyvinyl chloride (PVC) ten colors available Extruded PVC insulated singles bonded together Insulation thickness average : 9mil Min. insulation thickness : 7mil							
D	PHYSICAL PROPERTIES: after 7 days air oven at 136°C Average tensile strength : 1500 lbs/inch ² Percent of original : 70% at least Average elongation : 200% Percent of original : 65% at least							
E	ELECTRONIC CHARACTERISTICS : Spark test : 2500V Dielectric strength test : min. 2 KV in 1 minute Conductor resistance : Max. 237 Ω/km Insulation resistance : Min. 100MΩ/km Capacity : 45pF/m Inductance : 1.5 μH/m Impedance : 100Ω Propagation Delay Time : 4.2ns/m							
F								
G								
H					RoHS Compliant APPD.核准 Angel DWG.製圖 Jolin DATE 制表日 2007/02/12 SCALE 比例 參考 UNIT 單位 MM PAGE 張數 2 / 1 TOLERANCE 容許公差 .0 ± .00 ± ANG. ± SIZE. 紙張尺寸 A 4 REV. 版次 A PART NAME 品名 RAINBOW FLAT CABLE 1/2# PART NO. 料號 FC050-xxR			
	1	2	3	4	5	6	7	8