


A B C D E F G H

REV	DESCRIPTION	DATE
-----	-------------	------

△ RDK-96131	張善尹	2008/01/04
△ RDCM-108002	林淑娟	2019/05/20

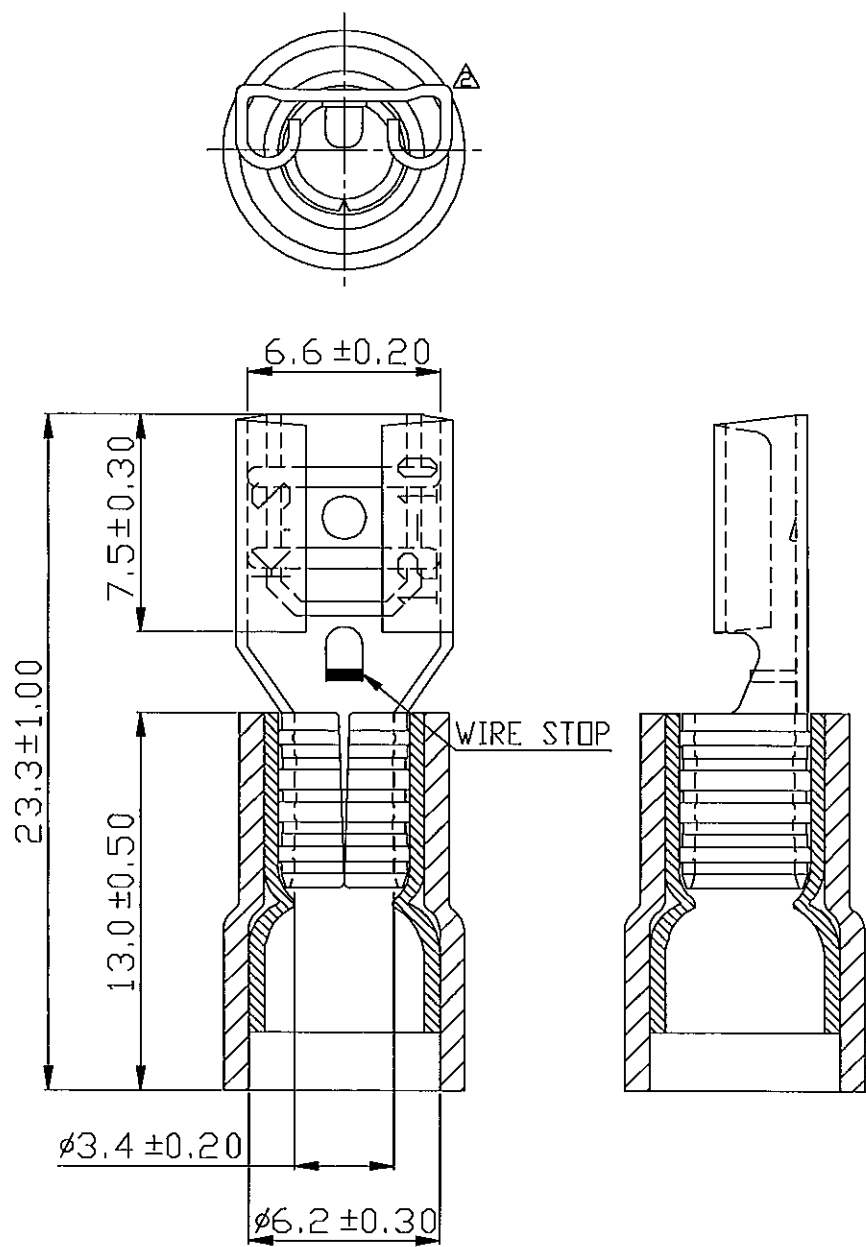

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	12	10
AMP.	20	24
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : YELLOW
5. TERMINAL MATERIAL : BRASS
6. WIRE RANGE : 12-10 A.W.G. ($4 - 6 \text{ mm}^2$)
7. NEMA TAB : 0.032 inch * 0.250 inch ($0.8 \text{ mm} * 6.35 \text{ mm}$)
8. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
9. TERMINAL SURFACE TREATMENT : TIN PLATED
10. TERMINAL THICKNESS : 0.40 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° REF $\pm$
18 > 30 mm ± 0.40	° REF $\pm$
30 > 75 mm ± 0.50	° REF $\pm$

NAME	VINYL-INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS				UNIT	mm	⊕
PART NO.	FDD5-250	MATERIAL	-----	APPROVE	張善尹		
NUMBER	KA-951322-C	SCALE	REV.	SHEET	CHECKED	林淑娟	
DATE	2006/09/07	4/1	1-2	10F1	DRAWN	謝婉如	

KST. K.S. TERMINALS INC.

A B C D E F G H