


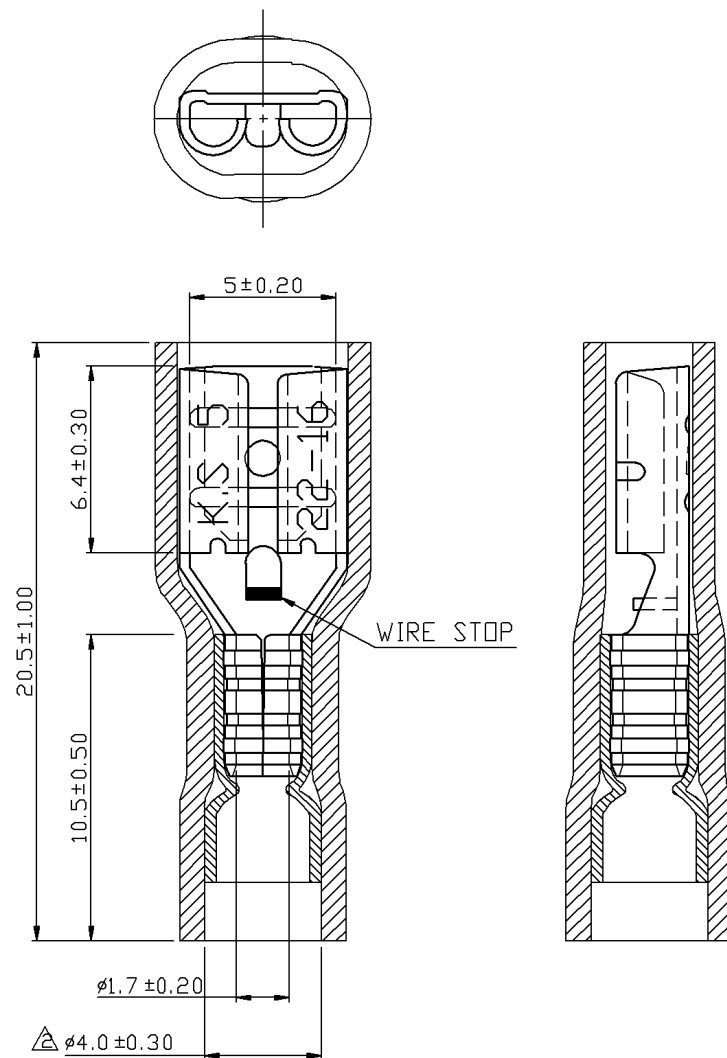

REV	DESCRIPTION	DATE
△	RDK-96131	張馨尹 2008/01/09
△	RDK-98053	洗勝賢 2009/03/17

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	3	4	7	10
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : BRASS
6. WIRE RANGE : 22-16 A.W.G. ($0.5-1.5 \text{ mm}^2$)
7. NEMA TAB : 0.020 inch * 0.187 inch ($0.5 \text{ mm} * 4.75 \text{ mm}$)
8. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
9. TERMINAL SURFACE TREATMENT : TIN PLATED
10. TERMINAL THICKNESS : 0.35 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF $\pm$
18 > 30 mm ± 0.40	° > ° $\pm$
30 > 75 mm ± 0.50	° > ° $\pm$

NAME	VINYL-FULLY INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS				UNIT	mm
PART NO.	FDFD1-187(5)	MATERIAL	-----	APPROVE	張馨尹	
NUMBER	KA-95160-C	SCALE	SHEET	PAGE	CHECKED	楊駿孝
DATE	2006/03/29	4/1	1-2	10F2	DRAWN	張馨尹

KST. K.S. TERMINALS INC.