

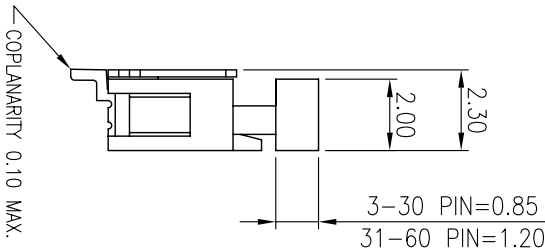
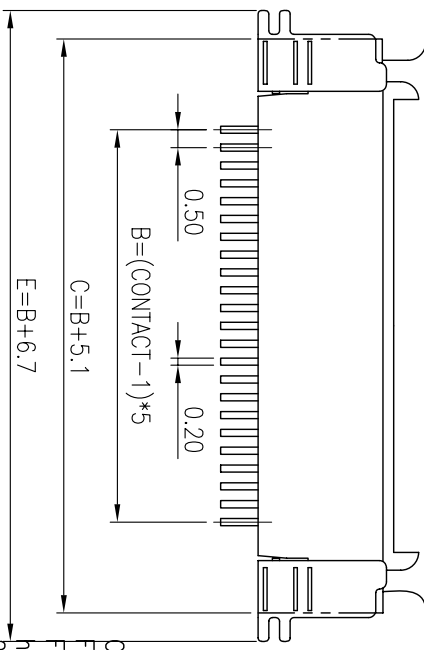
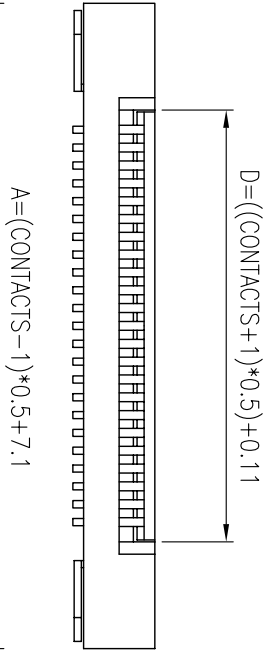
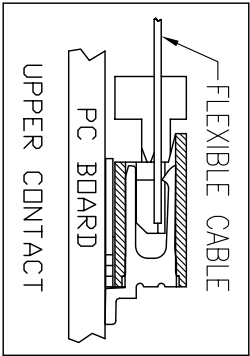
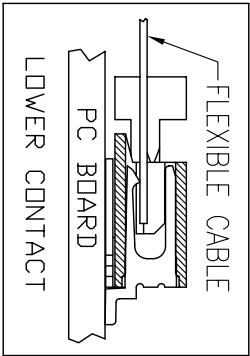
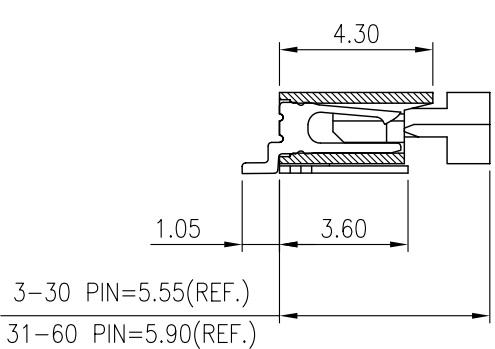


REVISIONS							
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
Δ				Δ			
Δ				Δ			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							281

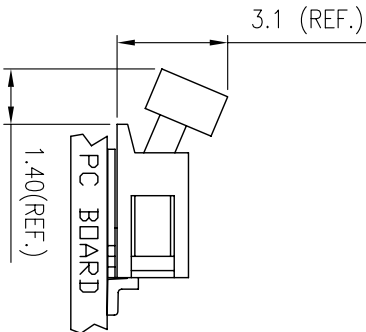

FEATURE AND SPECIFICATIONS
SIZES 03 TO 06 PIN.
VOLTAGE: 50V MAX.
CURRENT: 0.5A MAX.
CONTACT RESISTANCE: 20 MILLIOHMS MAX.
INSULATION RESISTANCE: 50 MEGOHMS MIN.
DIELECTRIC WITHSTANDING: VOLTAGE: 250V AC.
TEMPERATURE: -40°C TO 85°C
MATERIAL AND FINISH
HOUSING: NYLON 6T, UL 94V-0
ACTUATOR: HIGH-TEMP. THERMOPLASTIC, UL 94V-0
CONTACT: PHOSPHOR BRONZE, PLATING: TIN.
HOLDOWN: BRASS, PLATING: TIN.

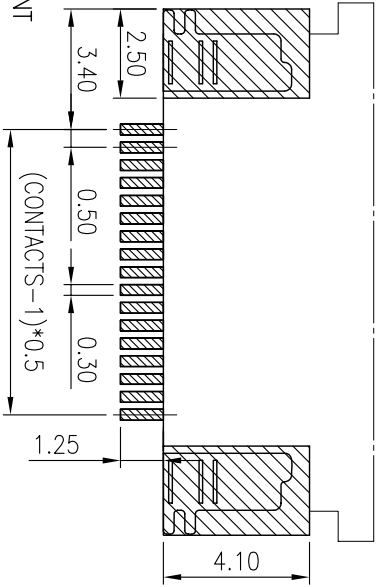

ORDER INFORMATION
FPCn200-RtXXT-X
FPC: FPC CONNECTOR
n: 0.5mm PITCH
200: SERIES NO.,
Rt: PCB TYPE,
RIGHT ANGLE SURFACE MOUNT
XX: NO. OF CONTACT
T: CONTACT PLATING, TIN PLATED
X: CONTACT TYPE
BLANK: LOWER CONTACT
U: UPPER CONTACT

RECOMMENDED PCB LAYOUT

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25			SIGNATURES		DATE	MODEL
SYMBOL	UNIT	SCALE	DRAWN	CONNIE	23/AUG/05	FPC CONNECTOR
Δ	mm	4/1	CHECKED	FRED	23/AUG/05	
			APPROVALS			FPCn200-Rt__T-__

MMT CORPORATION