
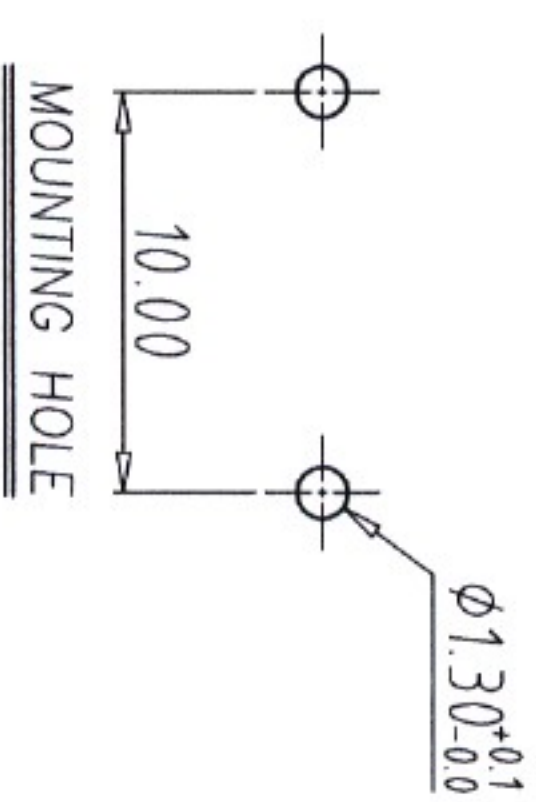
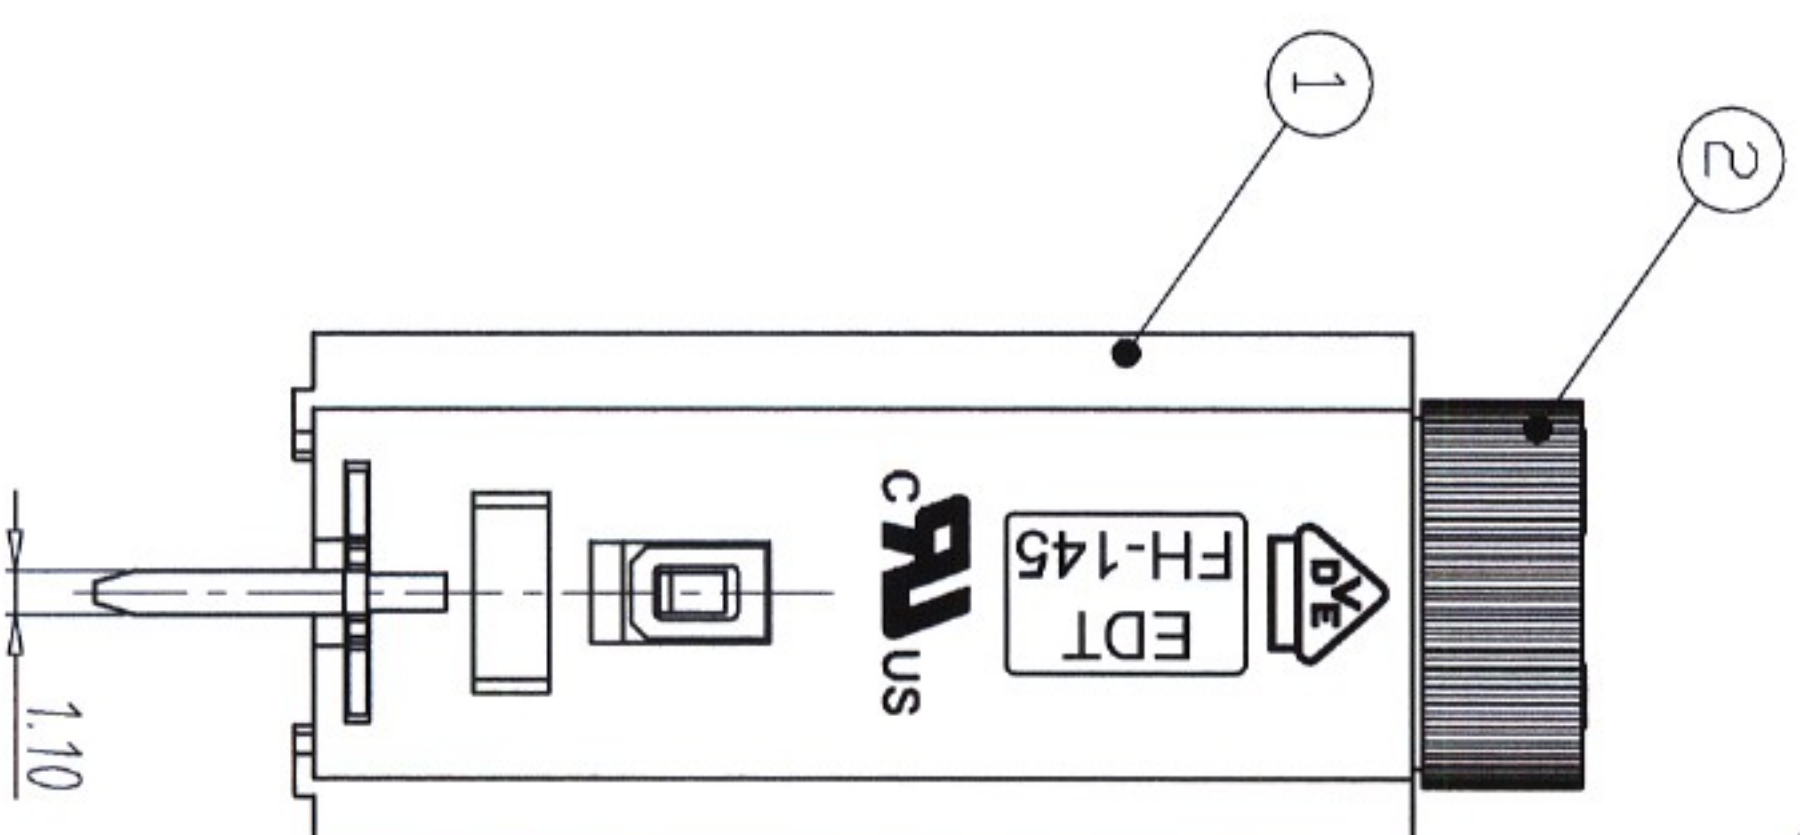
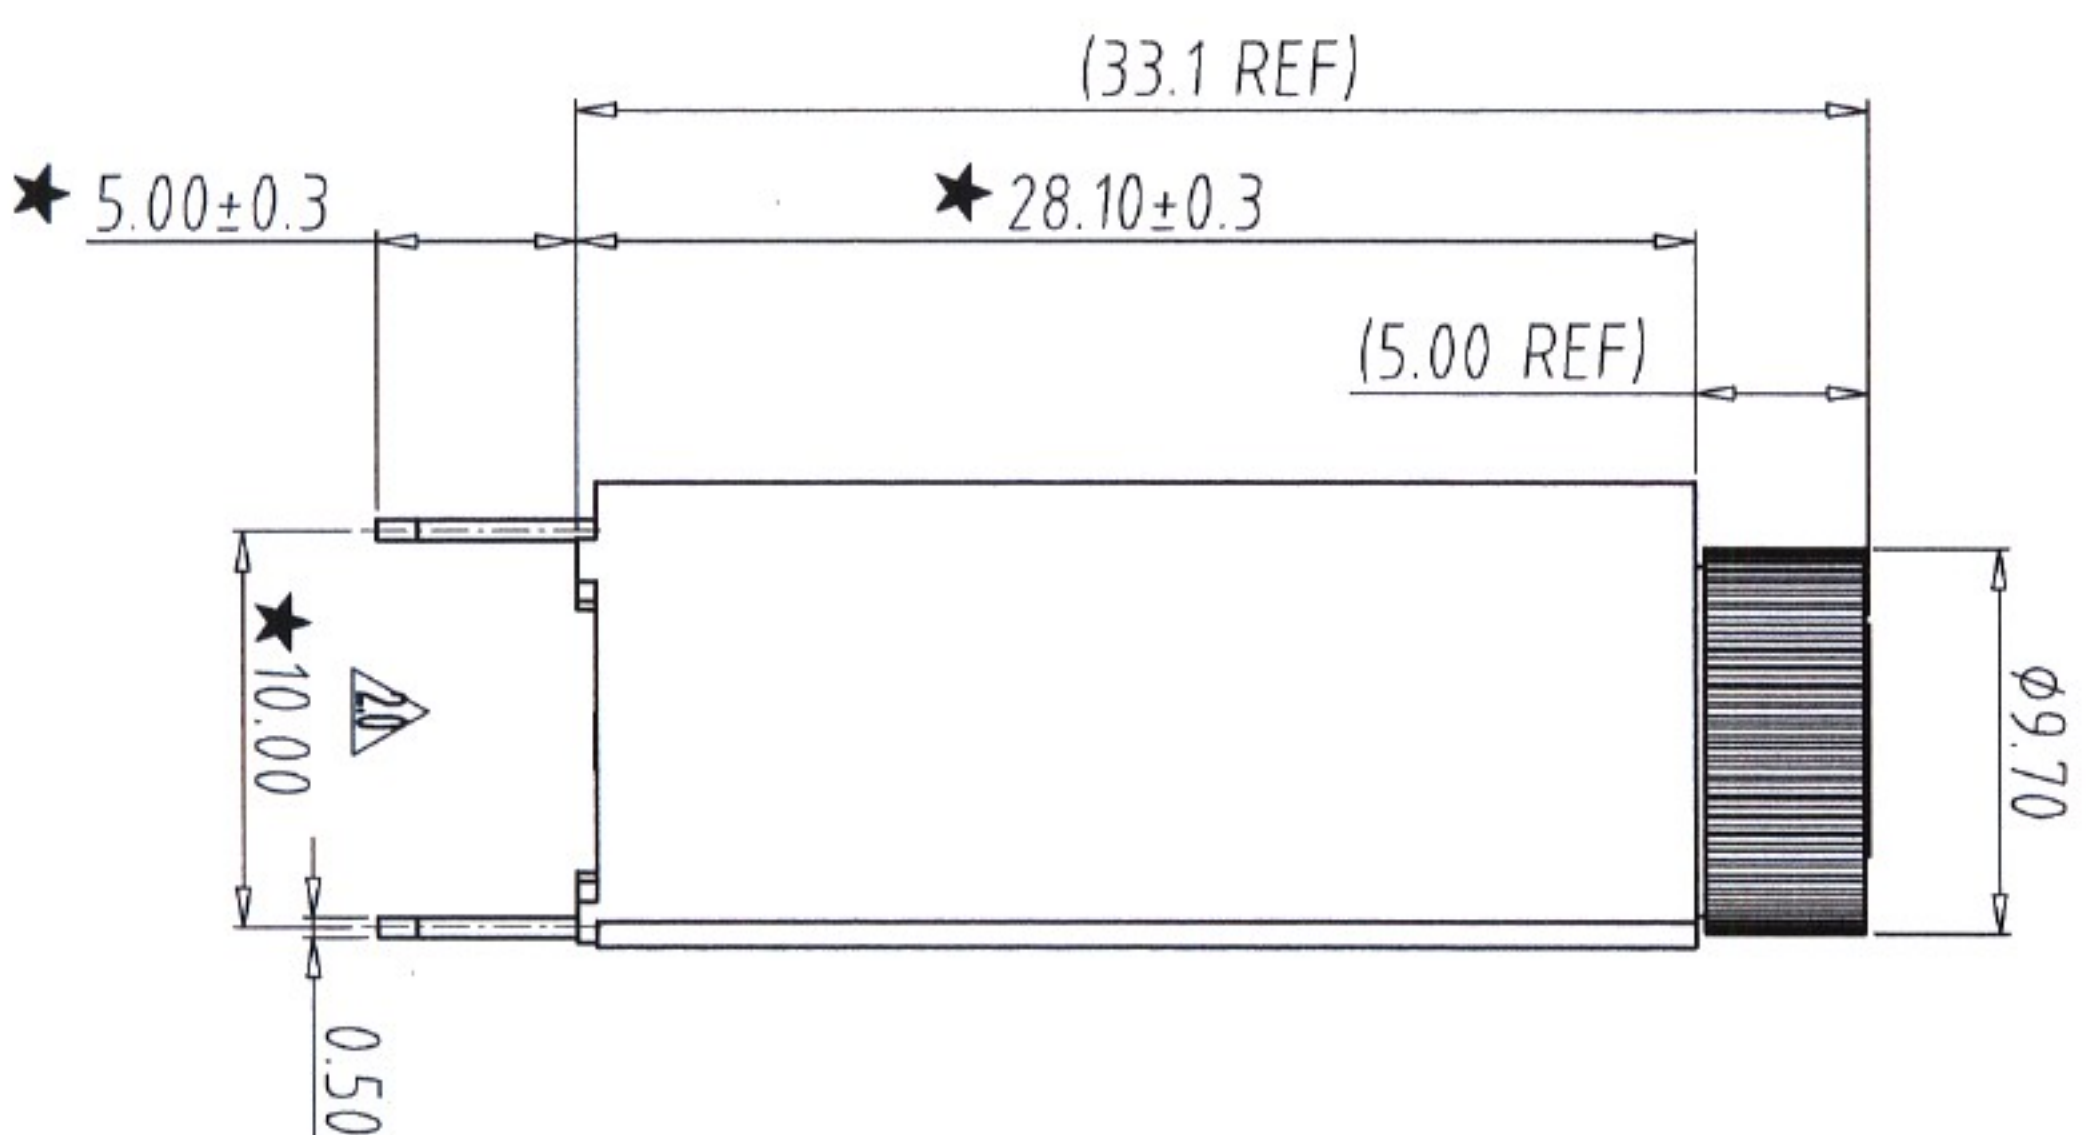


REV	E.C.N NO.	CONTENT	CHK	DATE
V1.0	S1709019	增加加纤材料，结案发行	YHZ	18.01.08
V2.0	S1801017	2.0 出纤间距新增管控	NJL	18.01.20
V3.0	S1807014	3.0 增加CUL认证标志	YHZ	18.08.02

NOTES:

1. Rating: 250V 6.3A 1.6W(VDE)
2. Insulation Withstands Voltage: AC2000V/Min
3. Insulation Resistance: 500M Ω or more at DC 500V
4. Using Temperature Range: -30°C~+85°C
5. Mountings $\varnothing 5.0 \times 20$ Fuse
6. ★ " the important dimension.
7. RoHS Compliance.

备注: 部件CAP②无需组装, 单独包装出货

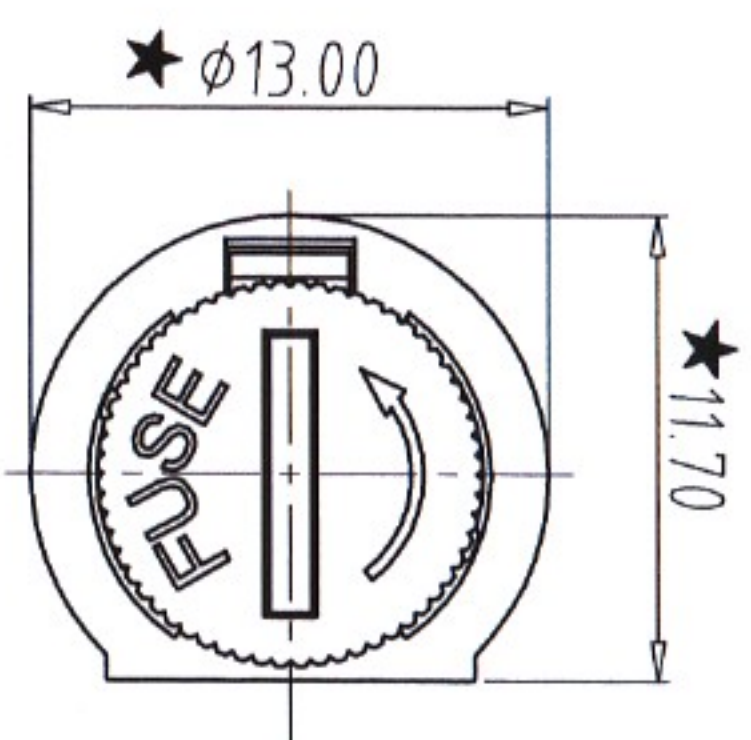

Total Pitch Tolerances in mm	Nominal dimension range in mm	T	$\pm$	—	//
---------------------------------	----------------------------------	---	-------	---	----

[illegible]

2.4	SPRING	TL045B0007	1	STAINLESS STEEL	
2.3	COPPER	TL045B0006	1	BRASS	Tin Plated
2.2	CLAMP	TL045B0005	1	BRONZE	Tin Plated
2.1	CAP HOUSING	TL045A30XX	1	PA66G25	UL94 V-0
2	CAP	FH-145C-A-XXX	1	/	/
1.3	SHORT SOLDER PIN	TL045B0002	1	BRASS	Tin PLATED
1.2	LONG SOLDER PIN	TL045B0001	1	BRASS	Tin PLATED
1.1	HOUSING	TL045A10XX	1	PA66G25	UL94 V-0
1	BASE	FH-145B-A-XXX	1	/	/

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE	
DWG.	YHZ	DATE	UNITS	MM	SHEET/OF	1/1
CHK.	DATE		SCALE	2 : 1	A4	
APP.	DATE		NAME	FH-145-A		



TIANLI

ELECTRICAL MACHINERY (NINGBO) CO., LTD.

DWGNO. TL-02-FH-145-A