
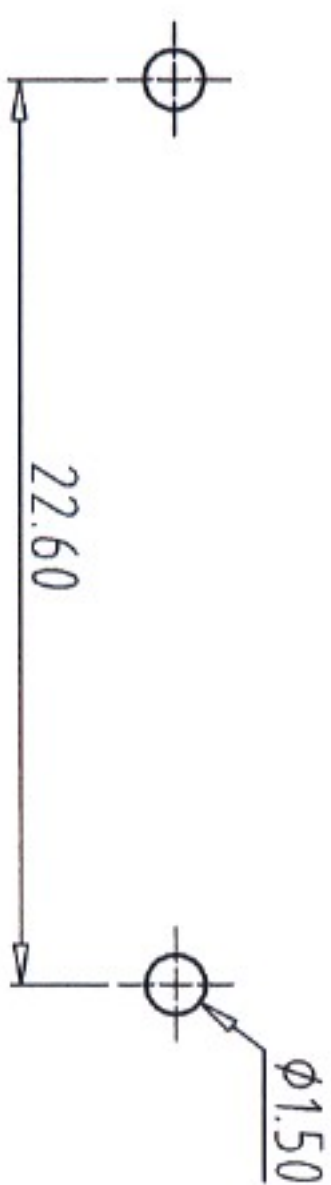
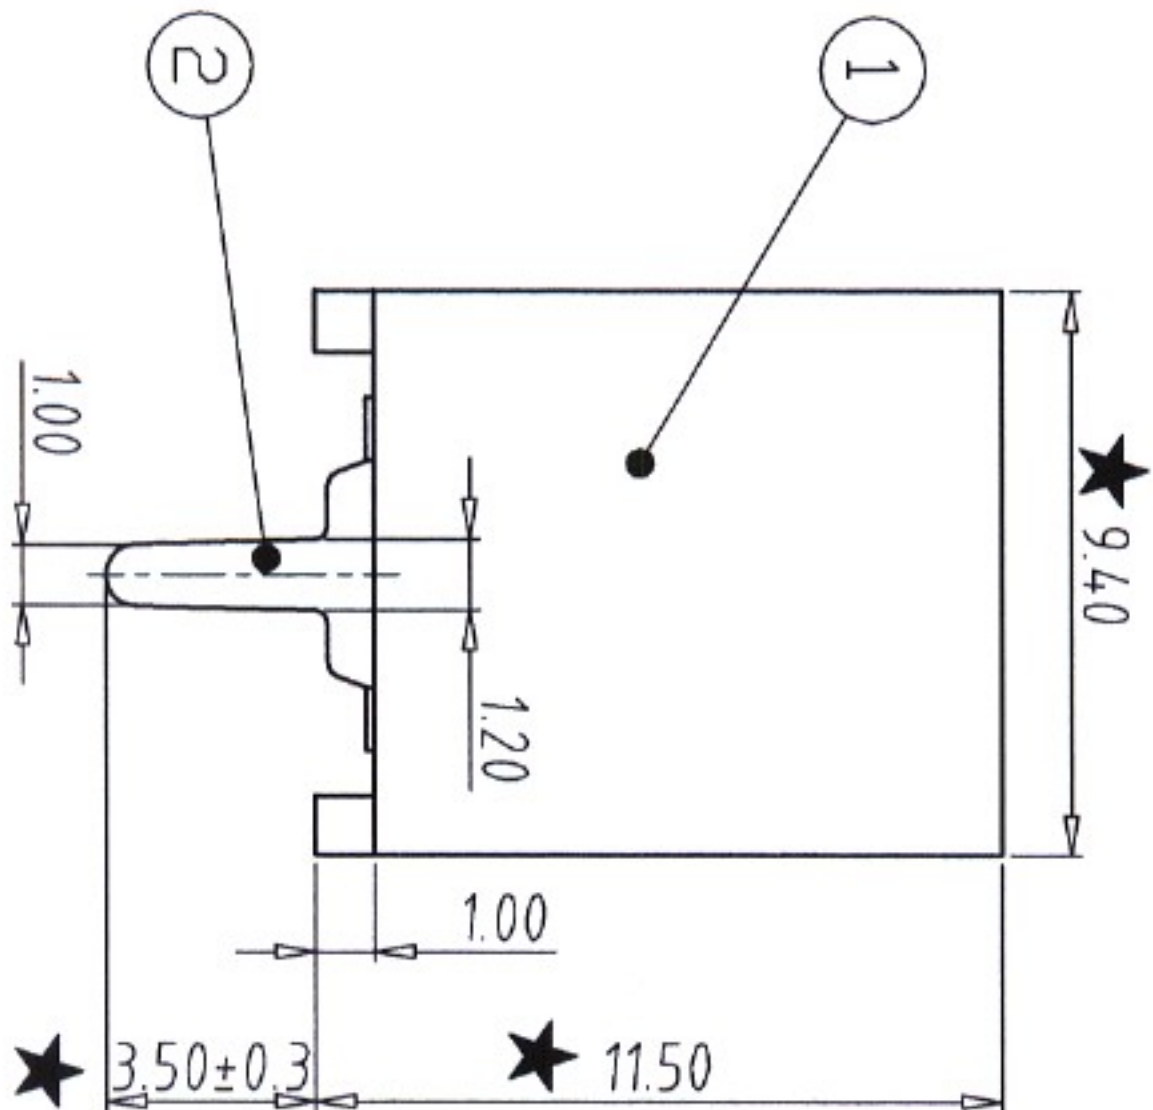
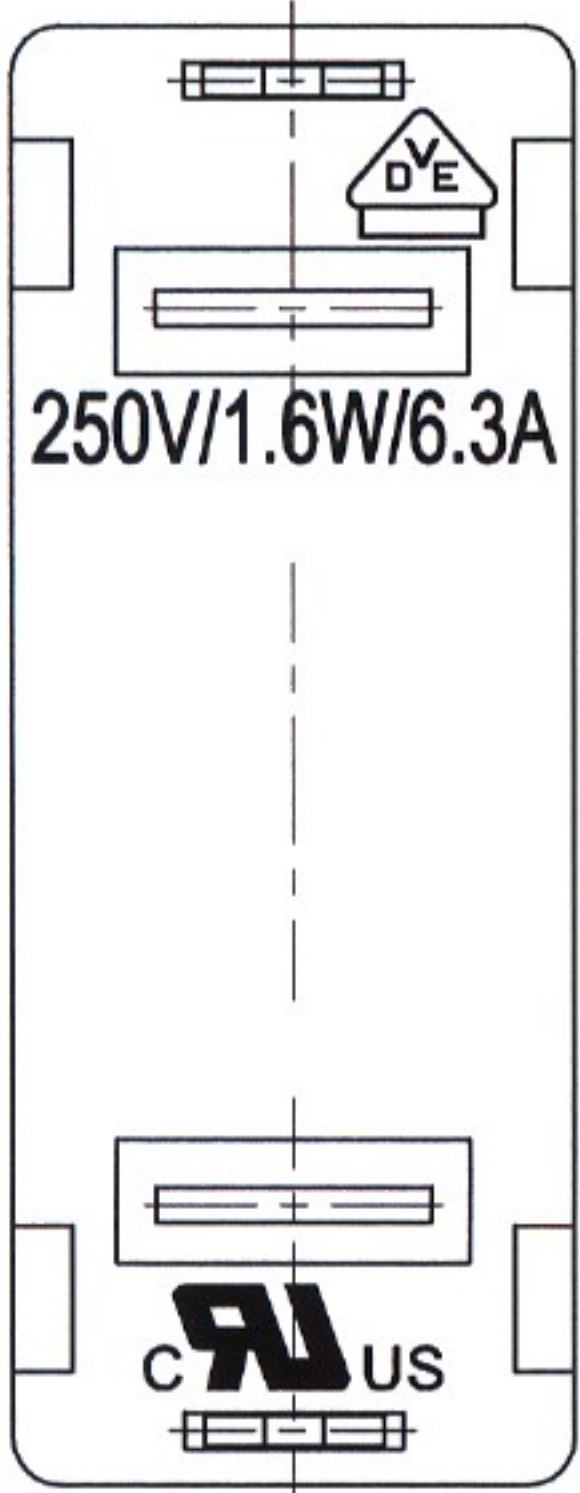
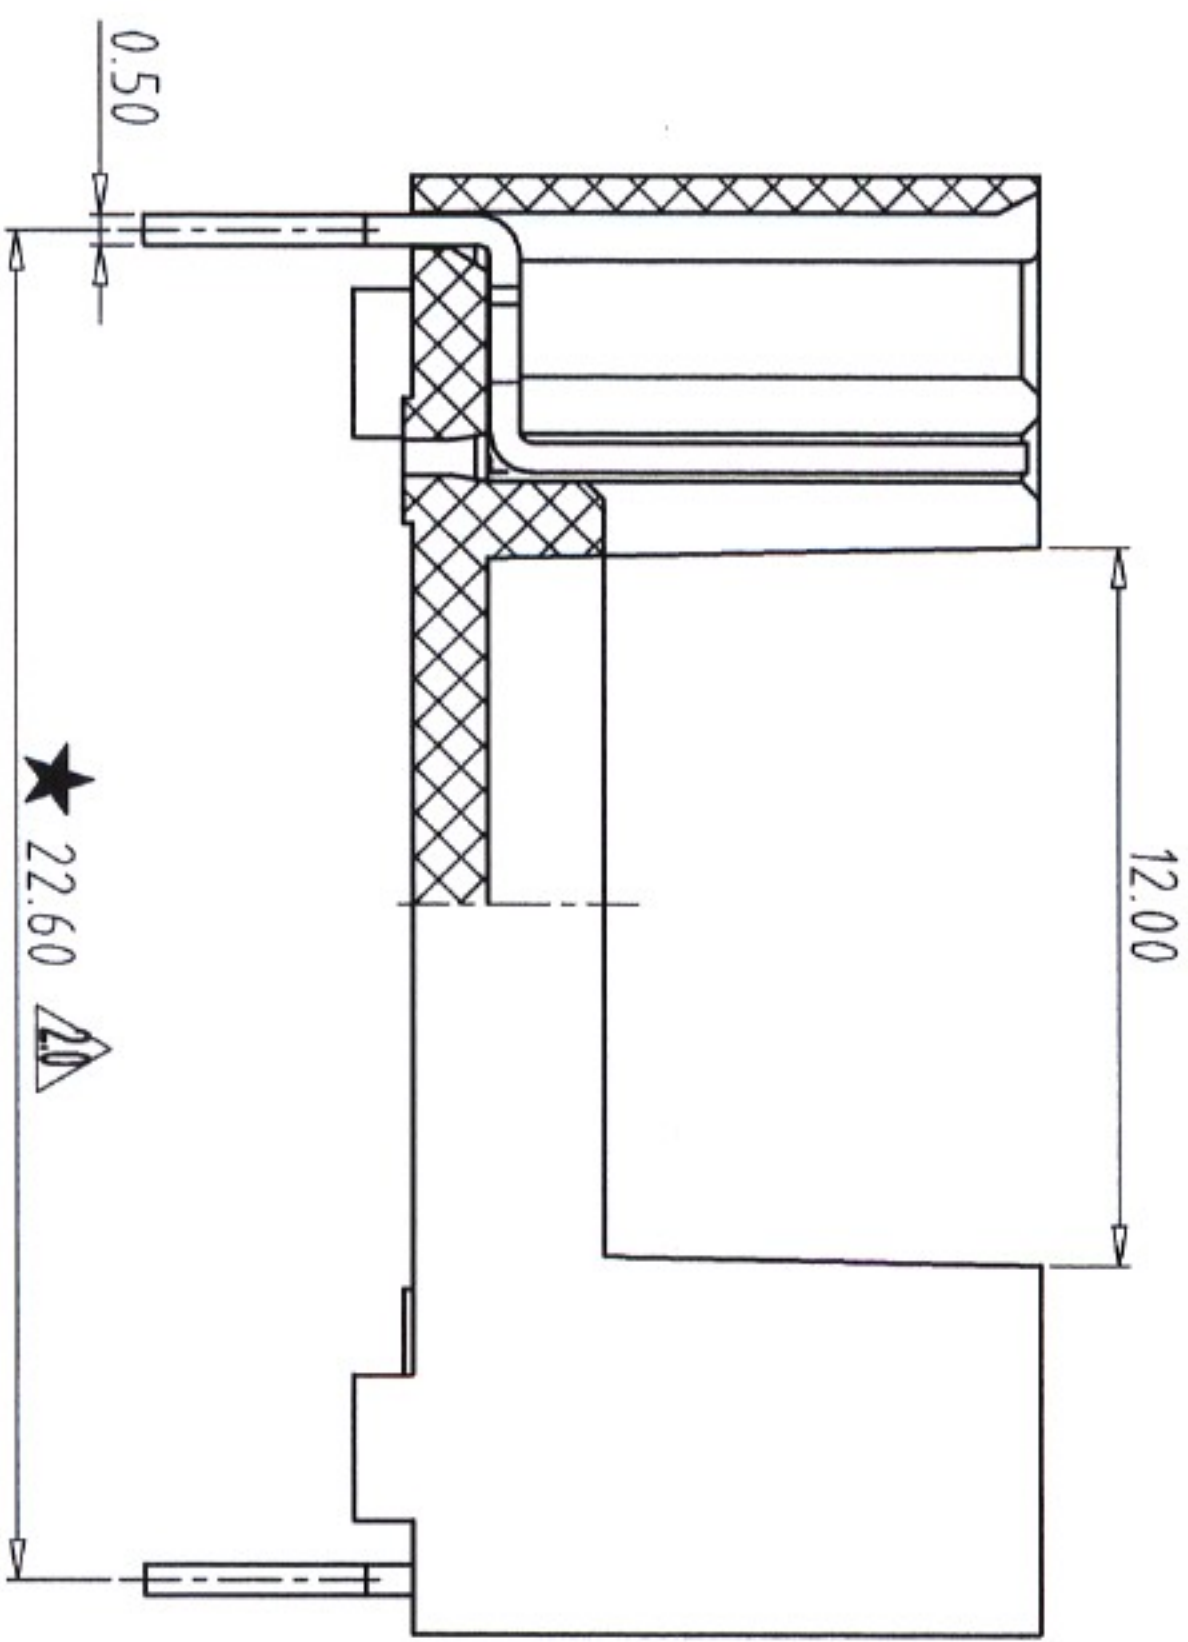


NOTES:

- 1. Rating: 250V 6.3A 1.6W(VDE)
- 2. Insulation Withstands Voltage: AC2000V/Min
- 3. Insulation Resistance: 500MΩ or more at DC 500V
- 4. Using Temperature Range: -30°C~+85°C
- 5. Mountings Ø5.0*20 Fuse
- 6. "★" the important dimension.
- 7. RoHS Compliance.

REV	E.C.N NO.	CONTENT	CHK	DATE
V1.0	S1709019	增加碳纤维材料，结束发行	YHZ	18.01.08
V2.0	S1801017 S1807014	增加CUL认证标志及出针间距增加管控	YHZ	18.08.02

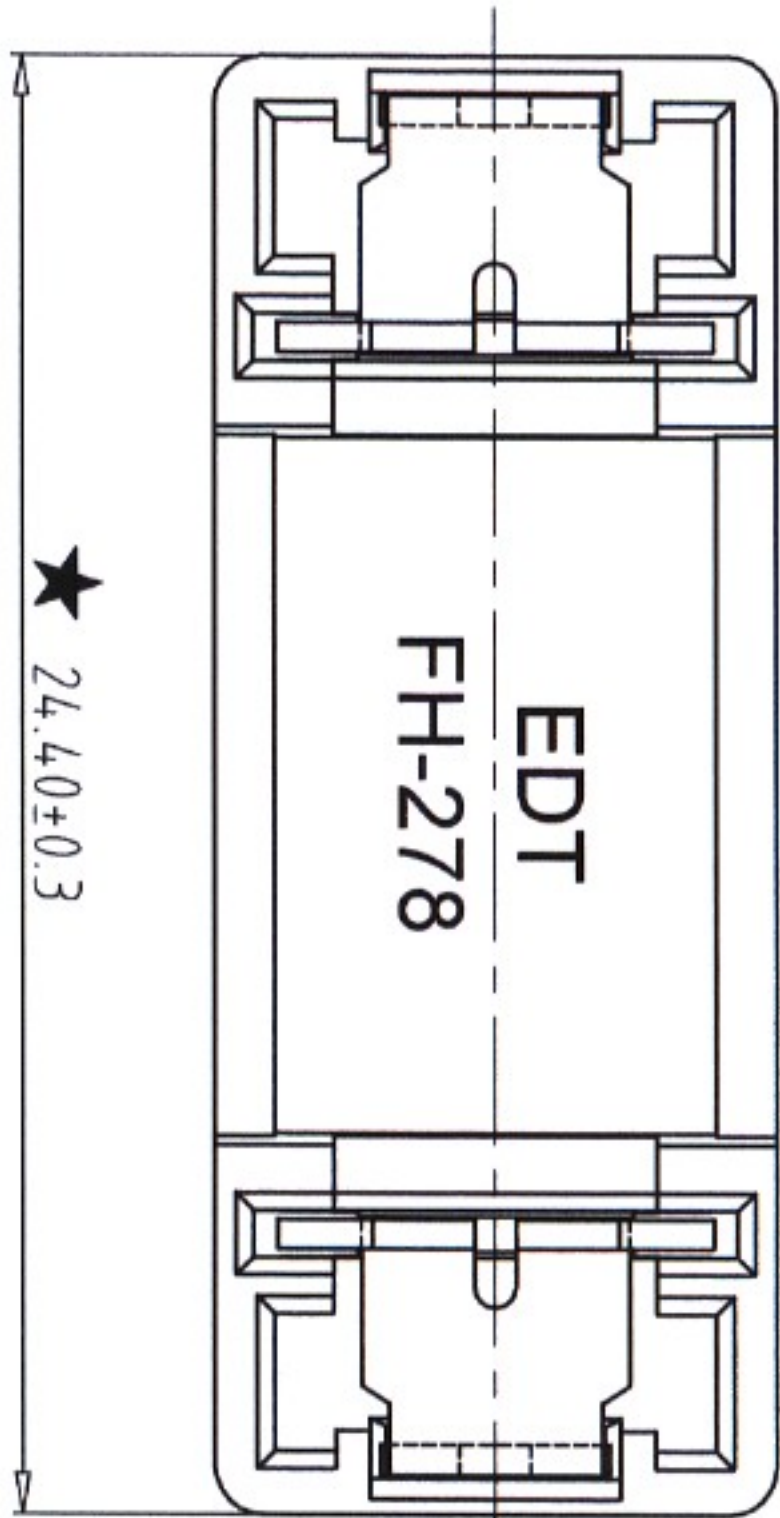

MOUNTING HOLE

Total Pitch Tolerances in mm		Nominal dimension range in mm			
—		—		—	//

±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5
-------	-------	-------	------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	-----	-----	-----	-----	-----	-----

2	SOLDER PIN	TL046B0001	2	BRASS	Tin Plated
1	HOUSING	TL046A20XX	1	PA66G25	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	YHZ	DATE	17.10.11	UNITS	MM
CHK.	DATE	18.08.02	SCALE	3:1	A4
APP.	DATE	18.08.02	NAME	FH-278B-A-XXX	1/1
ELECTRICAL MACHINERY (NINGBO) CO., LTD.					TL-02-FH-278B-A-XXX